SAMSUNG

DVD Television

Chassis : C18A(P)
Model: UW21J10VD5XXEG
UW17J11VD5XXEF
UW17J11VD5XXEE
UW17J11VD5XXEG

SERVICE Manual

DVD Television Cassette Recorder

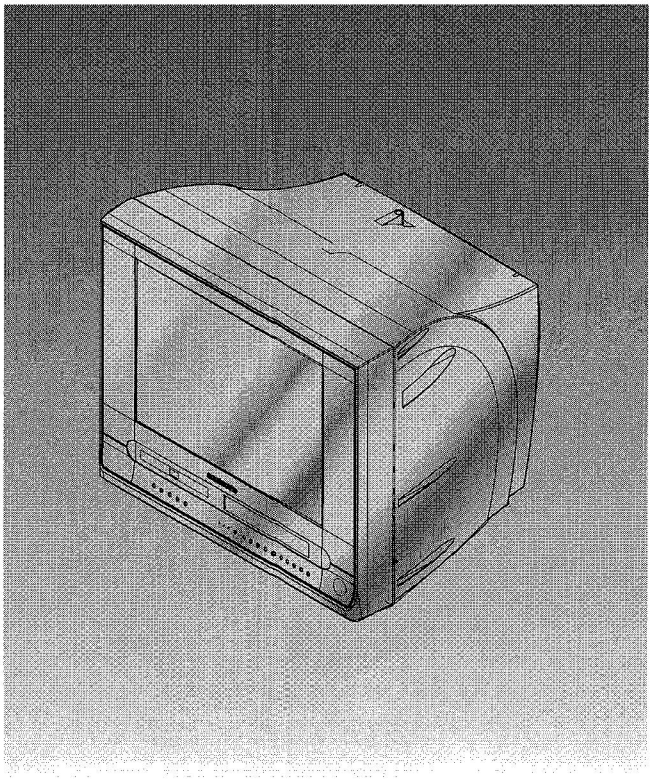

CONTENTS

1. Alignment and Adjustment
2. Disassembly
3. Exploded View and Parts List
4. Electric Parts List
5. PCB Diagram
6. Block Diagrams
7. Schematic Diagrams

1. Alignment and Adjustments (Electrical)

1-1 Preadjustment

1-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC901) or the CRT is replaced.
3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

1-1-2 When EEPROM (IC901) Is Replaced

1. When IC901 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC901 is replaced, warm up the TV for 10 seconds.

1-1-3 When CRT Is Replaced

Make the following adjustments after setting up purity and convergence:

White Balance
Sub-Brightness
Vertical Center
Vertical Size
Horizontal Size

1-2 Factory ("Service") Mode

1 -2-1 Procedure for the "Adjustment" Mode

1. This mode uses the standard remote control. The Service Mode is activated by: (1) pressing the "FACTORY" service key on the local-keyboard, or (2) by entering the following remote-control sequence (within 2 seconds):

   Display > Menu/Mute
   POWER ON

2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has three components: Adjustment, Option Bytes and Reset.
3. Access the Adjustment Mode by pressing the "SELECT" keys (◀ ▶). The adjustment parameters are listed in the accompanying table, and selected by pressing the "SELECT" keys (▲,▼).
4. Selection sequences for the PAL systems:

   down or up key:

   TXP>SCT>SBT>SSP>SCR>STT>BLR>BLG>
   RG>GG>BG>CDL>VSL>PVS>VA>PHS>
   SC>EWI>EWP>EUCN>ELCN>VSC>HPAR>
   HBOW>TC>EW2>PWL>WS>SVM>VMA>
   AKB>CLD>PRO>MVLO>STR>SCBT>VZ>
   BKS>BLS>TFR>CB>BPS>STBY>ESN>SEC>
   MSEC>EVB>VSSP>PDL>SDL>DSCR

5. The "SELECT" keys (▲,▼) increase or decrease the adjustment values, (stored in the non-volatile memory) when Adjustment Mode is cancelled.

1-2-2 Adjust

OSD	28"	21"	17"	Function
TXP	9	9	9	Text position
SCT	16	10	10	Sub contrast
SBT	10	10	10	Sub bright
SSP	5	5	5	Sub sharpness
SCR	3	13	13	SUB COLOR
STT	13	13	7	SUB TINT
BLR	32	32	32	Low-Lingt(Black level Offset R)
BLG	32	32	32	Low-Lingt(Black level Offset G)
RG	32	32	32	Hi-Lingt(White Point R)
GG	32	32	32	Hi-Lingt(White Point G)
BG	32	32	32	Hi-Lingt(White Point B)
CDL	10(13)	5	5	Cathode Drive Level
VSL	32	32	32	Vertical Slope
PVS	32	30	30	PAL Vertical Shift
VA	15	40	40	Vertical Amplitude
PHS	32	32	32	PAL Horizontal Shift
SC	12	12	12	S- Correction
EW1	18	18	18	EW Widh
EWP	32	32	32	EW Panorama
EUCN	20	20	20	Uppeer Corner
ELCN	20	20	20	Lower Corner
VSC	32	32	32	Vertical scroll
HPAR	28	28	28	H-Paralleogram
HBOW	32	32	32	Horizontal Bow
TC	20	20	20	EW Trapezium
EW2	18	18	18	Panorama EW(6.5/6.5)

OSD	28"	21"	17"	Function
PWL	15	15	12	Peak White Level
WS	3	3	3	Whiter Stretch
SVM	0	0	0	Delay of RGB Output to VM
VMA	2	0	0	Amplitude of Scan Velocity
AKB	0	0	0	Black Current Stabilization
CLD	0	0	0	YUV Clamp Pulse Delay
RPO	2	2	2	Rato Pre- and Over Shoot
MVOL	5	5	5	Melody Volume
STR	1	1	1	Color Trap Single/Double
SCBT	45	45	45	Screen Bright
VZ	32	32	32	Vertical Zoom
BKS	1	1	1	Block Stretcher
BLS	1	1	1	Blue Stretcher
TFR	0	0	0	DC Transfer Ratio of Lumi Single
CB	0	0	0	Chroma Bandpass
BPS	1	1	1	Bypass Delay Lune
STBY	1	1	1	DVD Siby power On/Off(reset)
ESN	1	1	1	End Sensor-less(VCR)
SEC	1	1	0	SECAM On/Off(VCR)
MSEC	1	1	1	Mesecam On/Off(VCR)
EVB	0	0	0	Extended Vertical Blanking
VSSP	8	8	3	VCR Playback Sharpness
PDL	8	8	8	PAL Y-Delay
SDL	12	12	12	SECAM Y-Delay
DSCR	15	15	15	DVD Sub Color

1-2-3 AGING Mode(Reference Only)

This pattern is used for pre-heating the CRT during manufacturing-it is accessed in the factory by twice pressing the "FACTORY" key.

Even if the TV power is cut off, the Aging Mode is not cancelled.
The "AGING" marking is displayed on the screen.
The AGING mode is cancelled by epresing the "FACTORY" key.

1-2-4 Option

NO	OSD	Adjust(28WF)	Adjust(21F)	Adjust(17F)	Range
1	Language	Europe	Europe	Europe	Europe/CIS
2	Help Message	On	On	On	On/Off
3	System	CW	CW	CW	CW/CS
4	SCART/RCA	2SCART	2SCART	1SCART	2SCART/1SCART/RCA
5	Audio	Stereo	Stereo	Stereo	Stereo/Mono
6	2H Comb	On	Off	Off	On/Off
7	Auto Power	On	On	On	On/Off
8	TTX	On	On	On	On/Off
9	LNA	Off	Off	Hidden	Off/Hidden/Normal
10	LIST/FLOF	FLOF	FLOF	FLOF	LIST/FLOF
11	E/W	On	Off	Off	On/Off
12	Tilt	On	Off	Off	On/Off
13	ATS	On	On	On	On/Off
14	Wide	On	Off	X 16:9	WIDE/NORMAL/X 16:9
15	Vol Table	Europe	Europe	Europe	Europe/Arab
16	DVD Reg	2	2	2	1/2/3/4/5/6
17	DVD Color	PAL	PAL	PAL	PAL/NTSC/Auto
18	G-Code	S-View	S-View	V-Plus	S-VIEW/V-Plus/None
19	VPS-PDC	PDC	PDC	PDC	VPS/PDC/None
20	VCR HEAD	HiFi	HiFi	4HD	Hifi/4HD/2HD

1-2-5 Screen Adjustment

1. Turn to the White Signal.

2. Adjust the VR screen for a normal picture is (no blooming or flyback line).
   Input the Factory -> G2-Adjust choice -> Screen VR tuning OK Mode

1-2-6 Reset

The Reset Mode is used during factorying inspection
Function Reset : After Factorying Reset, the following items itens revert to their initial values.

1. Volume	10
2. Channel	ANT 3
3. P- STD	MEMORY
4. Auto Power	ON
5. NR	OFF

Cautim : When the EEPROM is replaced ; all items revert to their initial values.

1-2-7 VCR Test Mode (Reference Only)

The VCR Test Mode is used during factorying inspection or when exchange VCR deck.
* Entering : STBY Mode -> factory key -> Power key (light up all LED)
Function : "9" -> Head Switch Auto Adjustment.
"5" -> Env Center point Auto Adjustment.
"TRK + " -> Env max point Adjustment.
"TRK - " -> Env min point Adjustment.
* Cancellation : pull out power cord.

1-3 Other Adjustments

1-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.

2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.

3. Use the specified test equipment or its equivalent.

4. Correct impedance matching is essential.

5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.

6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.

7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.

8. To protect against shock hazard, use an isolation transformer.

1-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 10 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

1-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +130 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 30KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 30KV under any conditions.

1-3-4 FOCUS Adjustment

1. Input a CROSS hatch signal.
2. Adjust the tuning Focus VR for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

1-3-5 Screen Adjustment

1. Turn to the White Signal.
2. Adjust the VR screen for a normal picture is (no blooming or flyback line).
   Input the Factory -> G2-Adjust choice -> Screen VR tuning OK Mode

1-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 5-1.
4. Input a black and white signal.
5. Fully demagnetize the receive by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 5-2).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

1-3-7 I²C BUS GEOMETRIC Adjust

1. V SIZE(VA)



2. UPPEER CORNER(EUCN) : 28" Only



3. V LINEARITY (VSL)



4. LOWER CORNER(ELCN) : 28" Only



5. S CORRECTION (SC)



6. H POSITION (PHS)

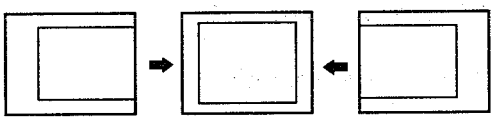

7. Horizontal Bow(HBOW)



8. H SIZE(EWI) 28" Only



9. H-Paralleogram(HPAR)



10. PIN COMP (EWP)

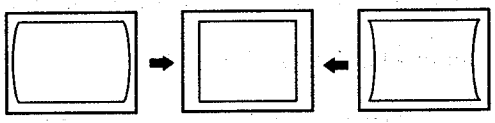

11. V POSITION (PVS)



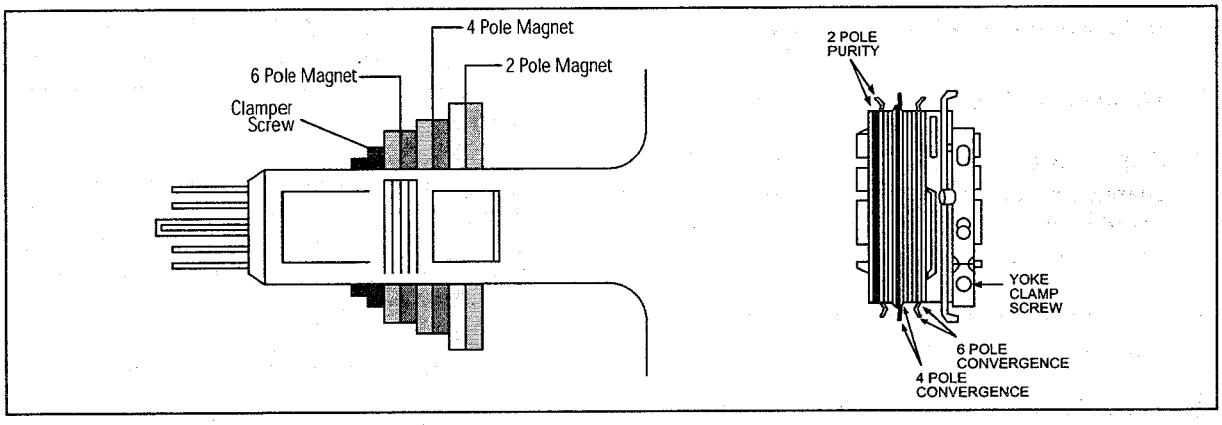

Fig. 5 -1 Convergence Magnet Assembly

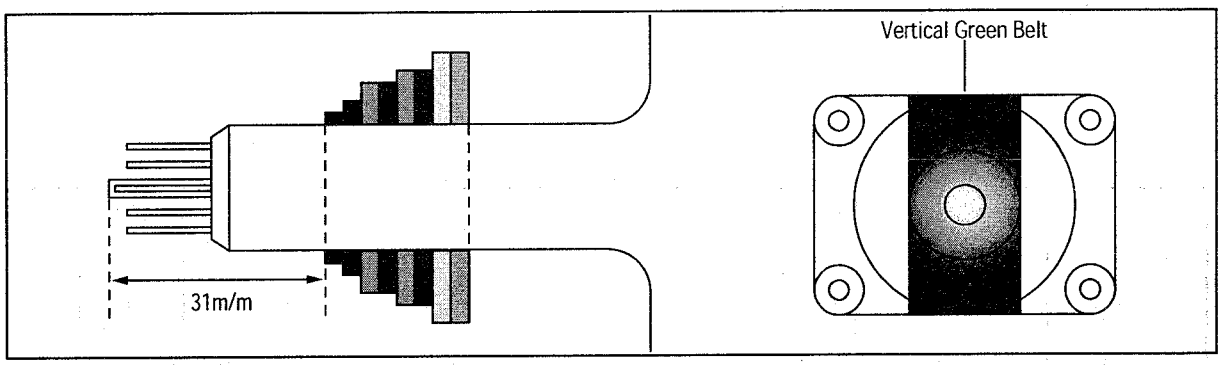

Fig. 5-2 Center Convergence Adjustment

1-3-8 White Balance Adjustment

1-4-7 (A) HIGH-LIGHT ADJUSTMENT

1. Input either a Lion Head or a "pure white" pattern.
2. Warm up the TV for 30 minutes.
3. Check the data in the Service Mode
4. Adjust RG, BG in the Factory Mode.

1-4-7 (B) LOW-LIGHT ADJUSTMENT

1. Automatically accomplished during the high-light adjustment.

1-3-9 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.
3. Adjust the Brightness and Contrast controls for a well defined picture.
4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
7. Repeat adjustments 2~6, if necessary.
8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 5-3).

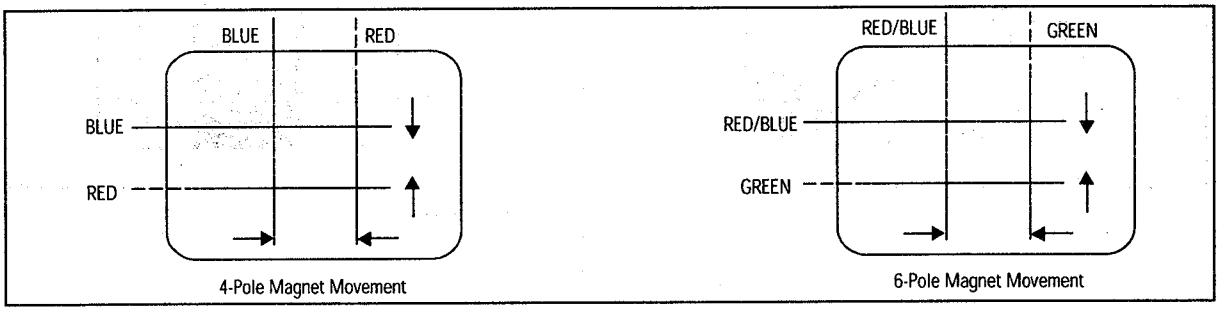

Fig 5-3 Center Convergence Adjustment

2. Disassembly and Reassembly

2-1 Disassembly

2-1-1 Main Assembly Removal

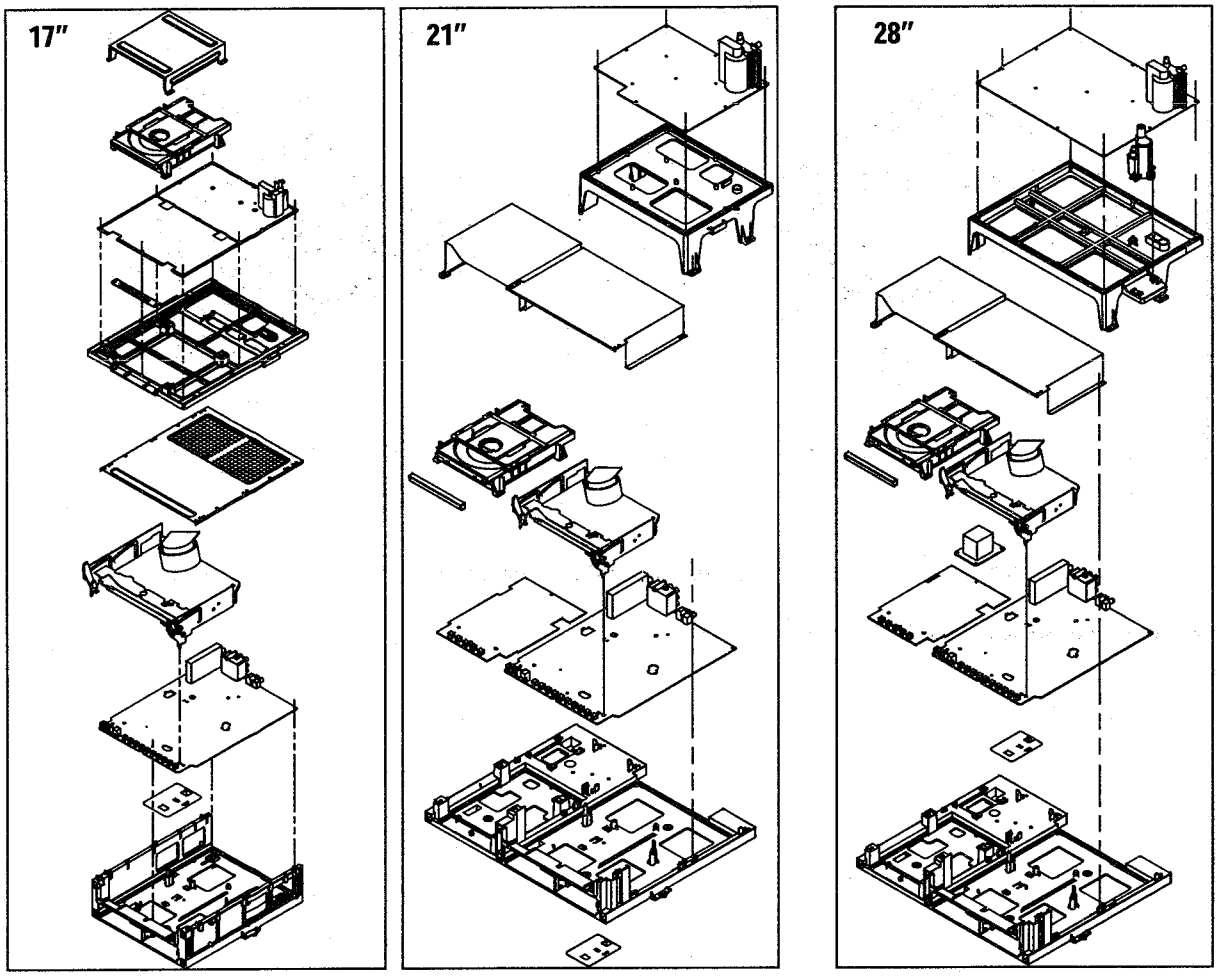

1. Release four connectors between (DVD Interface and Main PCB) Assembly.
2. Remove screws from the (DVD and VCR) shield case.
3. Remove shield case, then take out DVD PCB Assembly.
4. Remove screws from the DVD and VCR Deck.
5. Life up the DVD and VCR Deck, then Remove screws from Main and DVD Interface PCB Assembly.
6. Remove the Main and DVD Interface PCB Assembly.

※ On reassembling SET : When Holder-Deck is inserted to Front-Cabinet. Lift up VCR Holder-Tray at all times. Otherwise Open/Close Function is not operated.

2-1-2 Power Assembly Removal

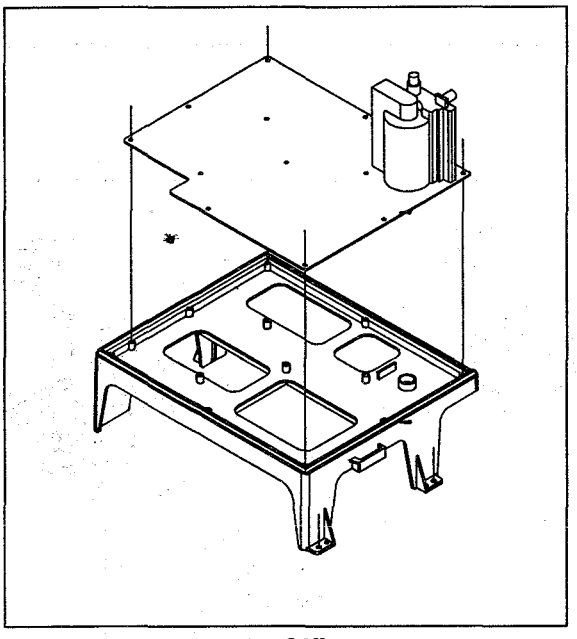

21"

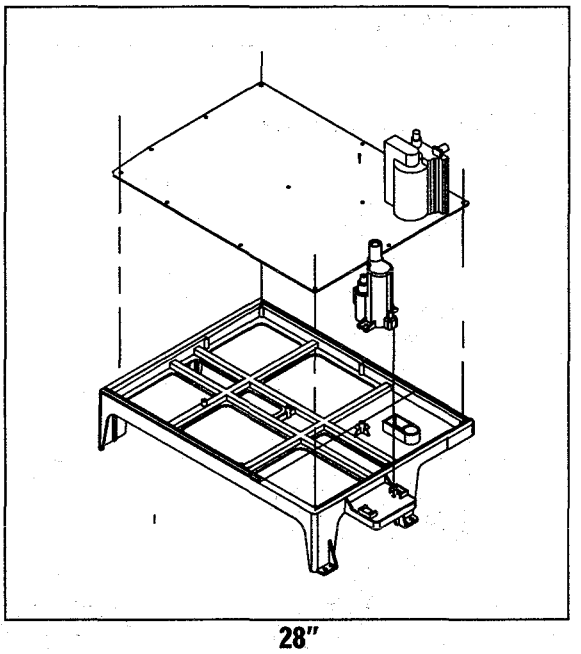

28"

1. Release two connectors between Power and Main PCB Assembly.
2. Remove screws from the Power Assembly.

2-2 Tape Transport System and Adjustment Locations

The tape transport system has been adjusted precisely in the factory. Alignment is not necessary except for the following :

1) Noise observed on the screen.
2) Tape damage.
3) Parts replacement in the tape transport system.

Lower flange height of tape guide is used as the reference for the transport adjustment.
To maintain the height of the tape guide and prevent damage, do not apply excessive force onto the main base.

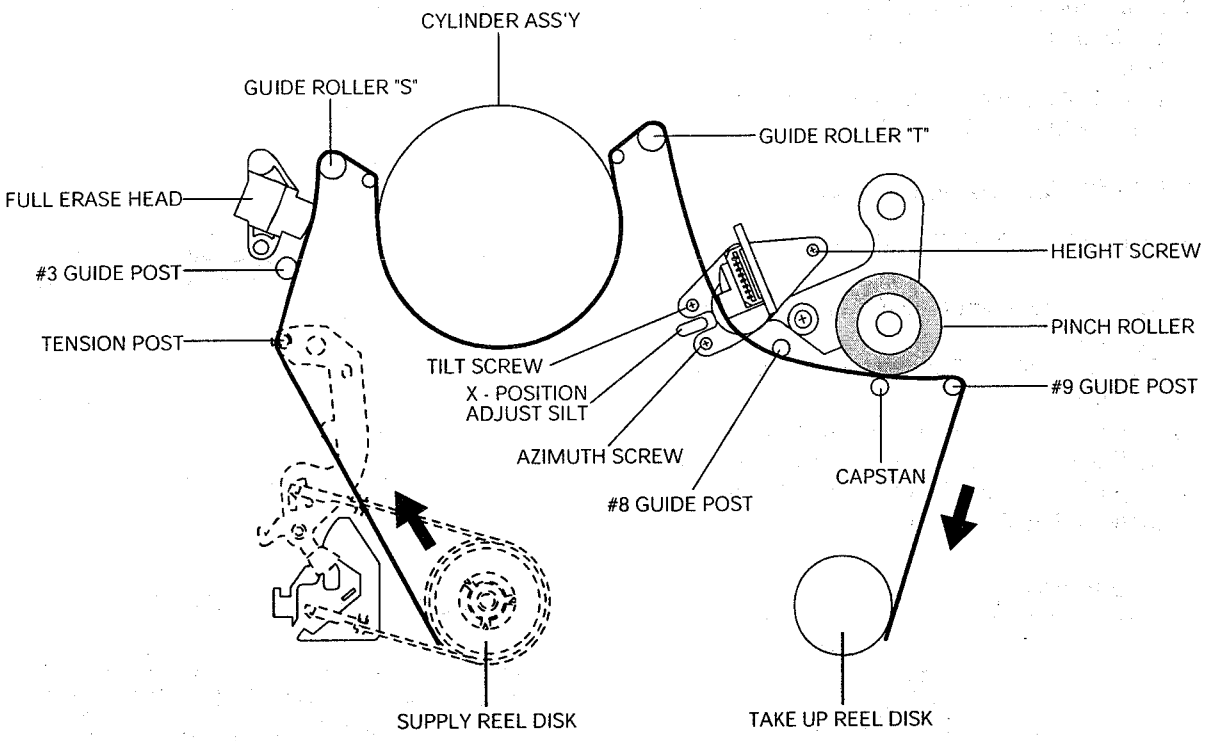

Fig. 2-2-1 Location of Tape Transport Adjustment

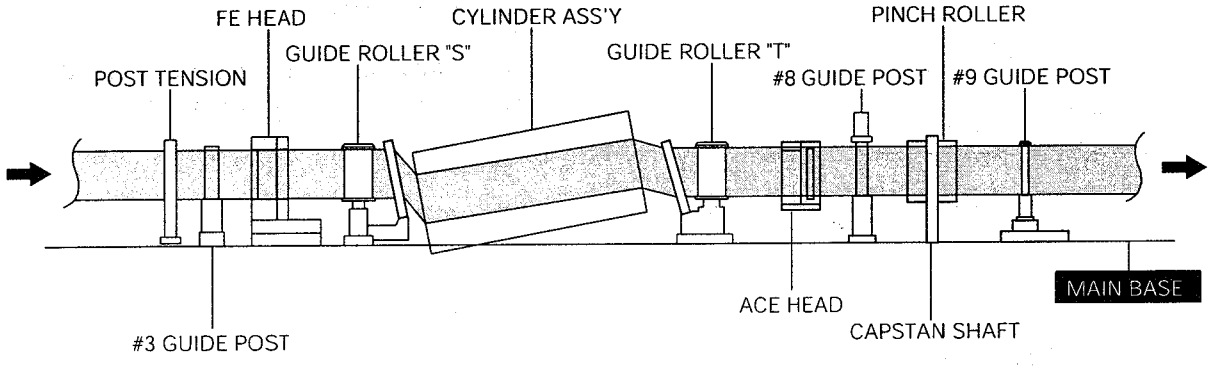

Fig. 2-2-2 Tape Travel Diagram

2-3 Tape Transport System Adjustment

When parts are replaced, perform the required adjustments by referring to procedures for the tape transport system. If there are any changes to the tape path, first run a T-120 tape and make sure excessive tape wrinkle does not occur at the tape guides.

1) If tape wrinkle is observed at the guide roller S, T, turn the guide roller S, T until wrinkle disappears.
2) If the tape wrinkle is still observed at the tape guide, perform the tilt adjustment of the ACE head.
(See "2. Alignment and Adjustment" of the Service Manual for Test Point Locations.)

2-3-1 ACE Head Assembly Adjustment

2-3-1(a) ACE HEAD HEIGHT ADJUSTMENT

1) Run the alignment tape (Color bar) in the playback mode.
2) Observe surface of the audio head using a dental mirror.
3) Turn screw (C) clockwise or counterclockwise until the gap of lower tape edge and the lower edge of the control head is about 0.25mm. (Refer to Fig. 3-5-1 and 3-5-2)

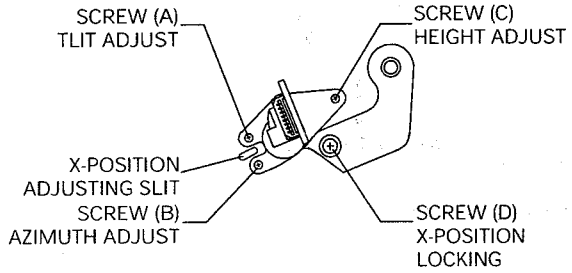

Fig. 2-3-1 Location of ACE Head Adjustment Screw

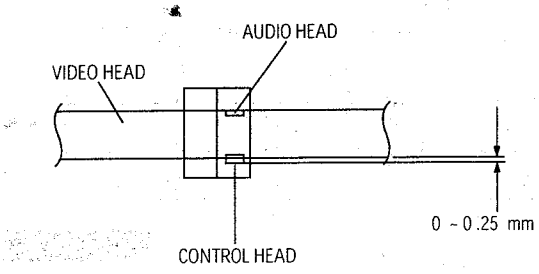

Fig. 2-3-2 ACE Head Height Adjustment

2-3-1(b) ACE HEAD TILT ADJUSTMENT

1) Playback a blank tape and observe the position of the tape at the lower flange of tape guide.
2) Confirm that there is no curl or wrinkle at the lower flange of tape guide as shown in Fig. 2-3-3 (B).
3) If a curl or wrinkle of the tape occurs, slightly turn the screw (A) tilt adjust on the ACE head ass'y.
4) Reconfirm the ACE head height.

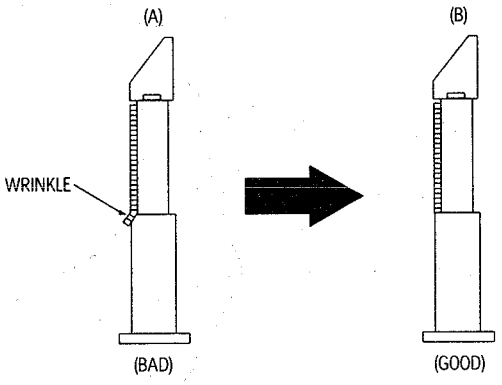

Fig. 2-3-3 Tape Guide Check

2-3-1(c) AUDIO AZIMUTH ADJUSTMENT

1) Load alignment tape (Mono scope) and playback the NTSC : 7KHz (PAL : 6KHz) signal.
2) Connect channel-1 scope probe to audio output. (Monitor Output)
3) Adjust screw (B) to achieve maximum audio level. (See Fig. 2-3-1)

4-5-1(d) ACE HEAD POSITION (X-POINT) ADJUSTMENT

1) See = (Alignment and Adjustment) for ACE Head position (X-Point) adjustment.

(Alignment and Adjustment)

1. Load alignment tape (Mono Scope) and play back a 7KHz signal. (SP Mode)

2. Connect CH1 scope probe to J008 or J009 (Monitor Audio Out) CH2 scope probe to TPM01 H'D SW Adjust sync to Channel 1.

3) Set the control pulse to 7 msec using the Fine tracking buttons +/- on the remote control. (see Fig. (A),(B))

4) Connect CH1 scope probe to TPM01 Video ENV.

5) Insert the adjusting driver into the X-position adjusting gear and adjust the driver for maximum envelope waveform.

Note:
Do not adjust the X-point using excessive force. After turning the X-point adjusting screw (D) counteerclock wise a little, perform the adjustment and then tighten the screw. (See Fig. 2-3-1)

SCOPE SETTINGS

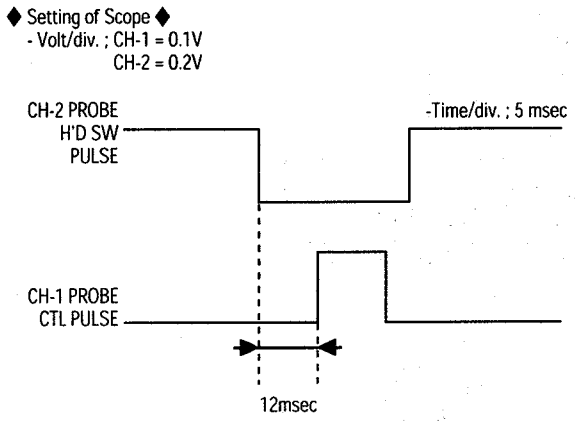

(A) Tracking Preset Adjustment (4HD/6HD)

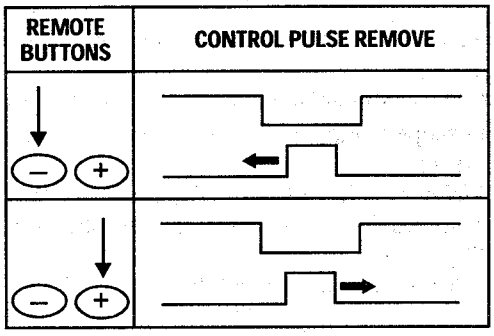

(B) Control Pulse Adjustment

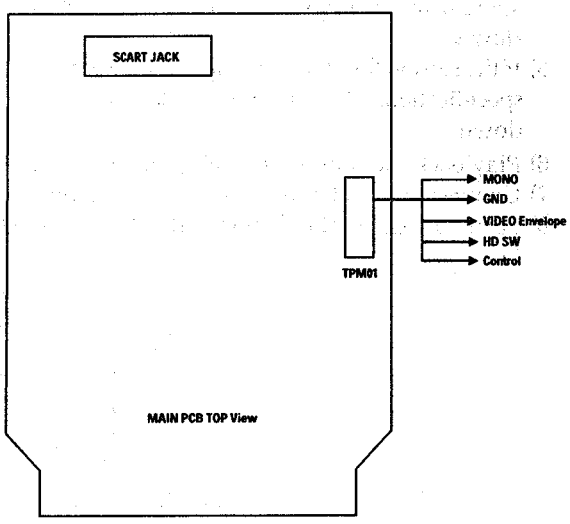

(C) MAIN PCB VCR TP Point

2-3-2 Linearity adjustment (Guide roller S, T adjustment)

1) Playback the Mono Scope alignment tape (SP mode).
2) Observe the video envelope signal on an oscil-lo-scope (triggered by the video switching pulse).
3) Make sure the video envelope waveform (at its minimum) meets the specification shown in Fig. 2-3-4.
   If it does not, adjust as follows :

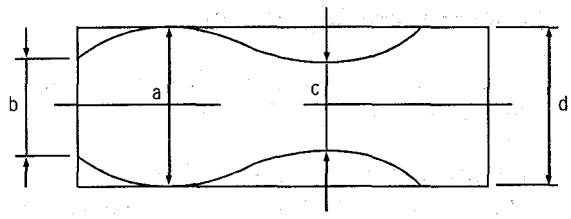

a b c d
c,b,d/a ≧63%

Fig. 2-3-4 Envelope Waveform Adjustment

Note :
a=Maximum output of the video RF envelope.
b=Minimum output of the video RF envelope at the entrance side.
c=Minimum output of the video RF envelope at the center point.
d=Maximum output of the video RF envelope at the exit side.

4) If the section A in Fig. 2-3-5 does not meet the speci-fication, adjust the guide roller S up or down.
5) If the section B in Fig. 2-3-5 does not meet the speci-fication, adjust the guide roller T up or down.

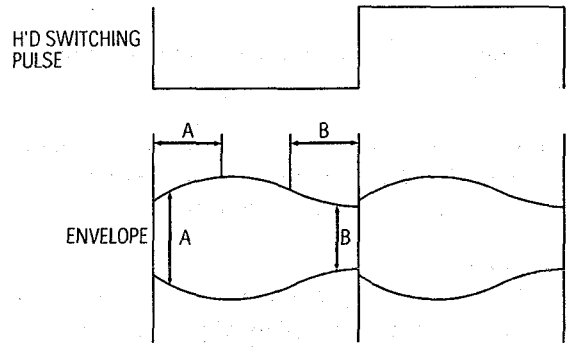

Fig. 2-3-5 Adjustment Points

6) Play back the Mono Scope alignment tape (SP mode).
7) Connect an oscilloscope CH-1 to the Envelope and CH-2 to the H'D SW Pulse for triggering. (TPM01)
8) Turn the guide roller heads with a flat head (▬) driver to obtain a flat video RF envelope as shown in Fig.

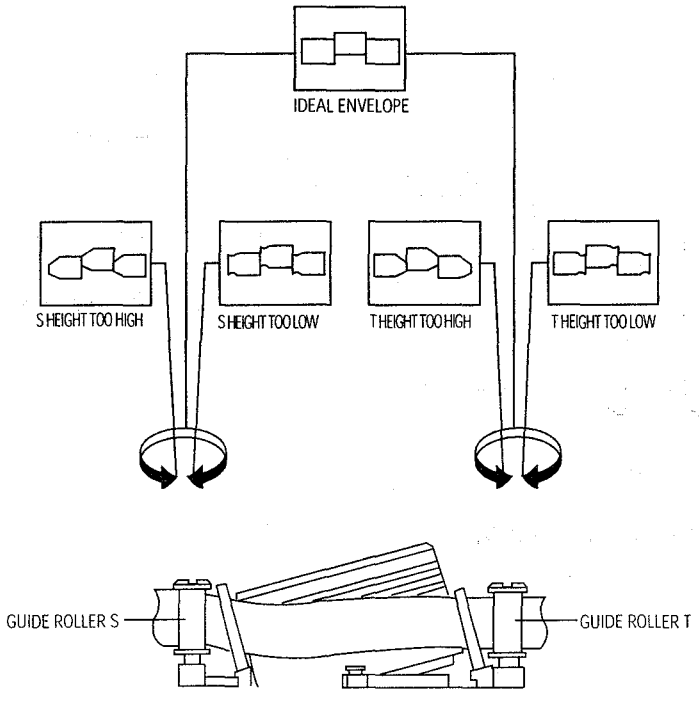

Fig. 2-3-6 Guide Roller S, T Height Adjustment

2-3-3 Check Transitional Operation from RPS to Play

Check transition from RPS mode to play mode : Using a pre-recorded SP tape, make sure the entry side of envelope comes to an appropriate steady state within 3 seconds (as shown in Fig. 2-3-7). If the envelope waveform does not reach specified peak-to peak amplitude within 3 seconds, adjust as follows :

1) Make sure there is no gap between the supply roller lower flange and the tape.
   If there is a gap, adjust the supply guide roller again.
2) Change operation mode from the RPS to the play mode (again) and make sure the entry side of envelope rises within 3 second.

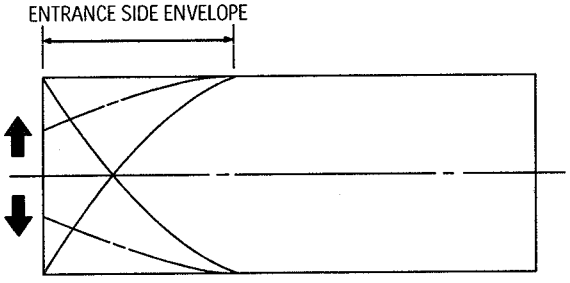

Fig. 2-3-7 Video Envelope Rising when Operation mode Changes from RPS to Play Mode

2-3-4 Envelope Check

1) Make recordings on T-120 (E-120) and T-160 (E-180) tape.
   Make sure the playback output envelope meets the
   specification as shown in Fig. 2-3-8.
2) Play back a self recorded tape (recording made on the unit using with T-120 (E-120).
   The video envelope should meet the specification as shown in Fig. 2-3-8.
   In SP mode, (A) should equal (B).
   If the head gap is wide, upper cylinder should be checked.

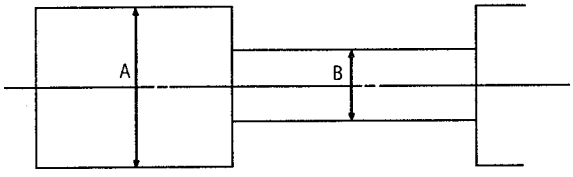

Fig. 2-3-8 Envelope Output and Output Level

2-3-5 Tape Wrinkle Check

1) Run the T-160 (E-180) tape in the playback, FPS, RPS and Pause modes and observe tape wrinkle at each guide.
2) If excessive tape wrinkle is observed, perform the following adjustments in Playback mode :

   Tape wrinkle at the guide roller S, T section : Linearity adjustment.
   Tape wrinkle at tape guide flange : ACE head assembly coarse adjustment.

2-4 Reel Torque

1) The rotation of the capstan motor causes the Holder Clutch Ass'y to rotate through the Belt Pulley.
2) The spring wrap PLAY/REV of holder clutch ass'y drives the disk reel S, T through gear idle by rotation of gear center ass'y.
3) Brake is operated by slider cam at FF/REW mode.
4) Transportation of accurate driving force is done by gears. (Gear Center Ass'y)

Note : If the spec. does not meet the followings specifications, replace the holder clutch ass'y and then recheck.

<Table 2-4>

MODE	TORQUE g/cm	GAUGE
PB	42± 11	Cassette Torquemeter
RPS	145 ± 30	Cassette Torquemeter

MEMO

3. Exploded View & Parts List

3-1 UW21J10VD5XXEG

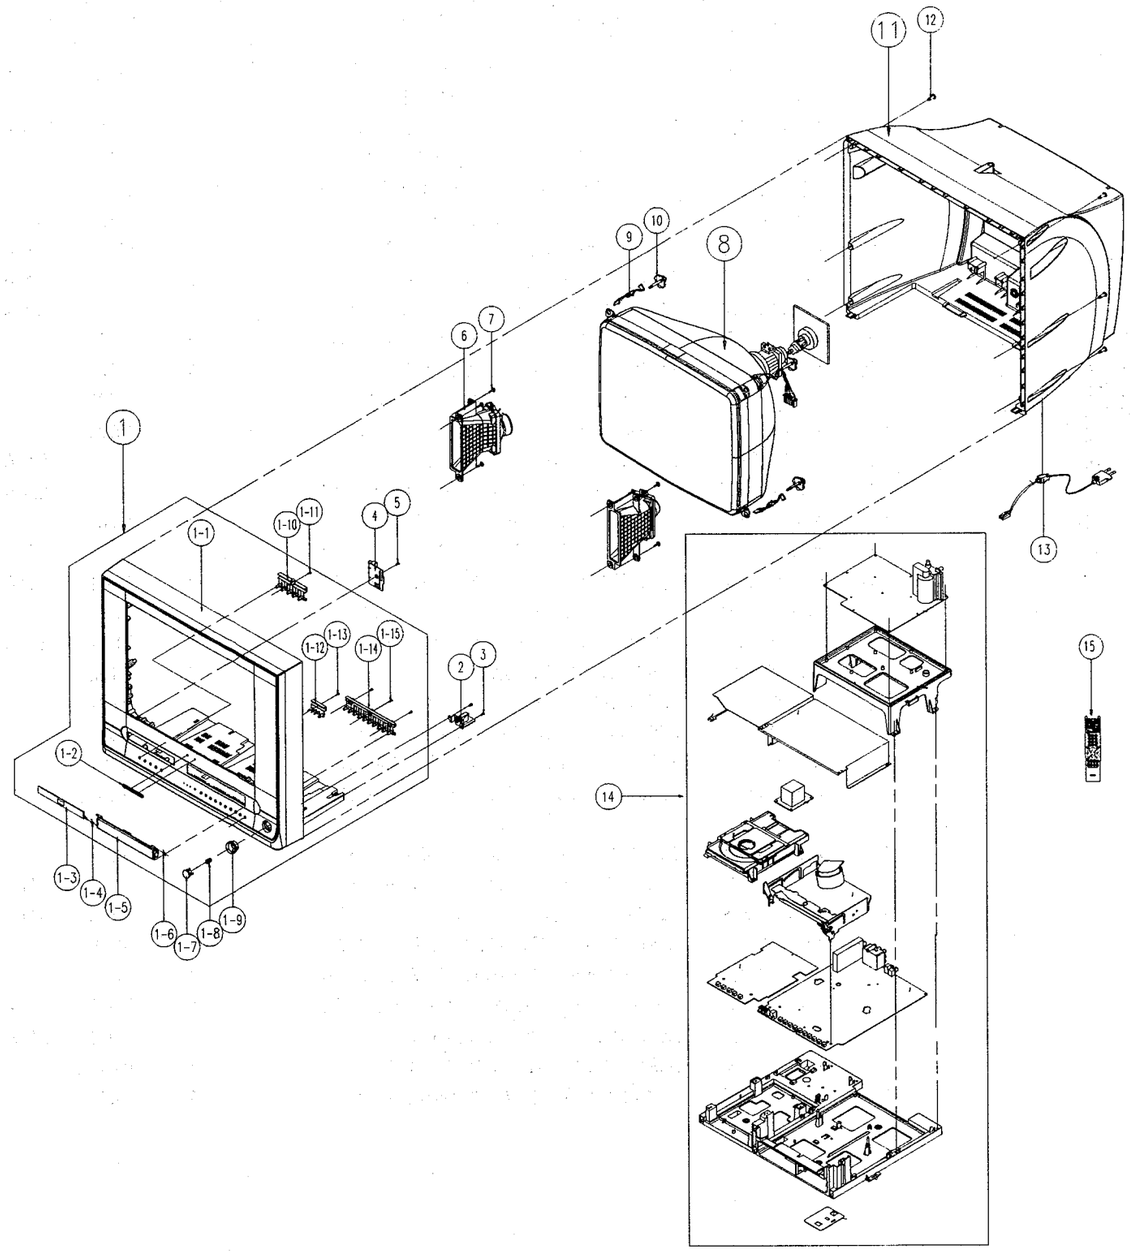

No	Code No	Description	Specification	Q'ty		Remark
1	AA96-01727A	ASSY COVER P-FRONT;21J10,SEH,HIPS,HB,G43		1	M0003	
1-1	AA64-03626A	CABINET-FRONT;21J10,HIPS,HB,G4309,SV012P		1		S.N.A
1-2	AA64-70117B	BADGE-BRAND;,AL,T1.5,10.6,L65,BLK,SILVER		1	T0057	S.N.A
1-3	AA64-03473A	DOOR-TRAY;29J10,ABS HB,G3676,SV012P		1	T0153	
1-4	AA61-01223A	SPRING ETC-DOOR,DVD;21J5,SUS304,T0.3		1	T0562	
1-5	AA61-01224A	SPRING ETC-DOOR,VCR;21J5,SUS304,T0.4		1		S.N.A
1-6	AA64-03474B	DOOR-HOUSING;28,29J10,ABS,G3676,HB,SV012		1	T150	
1-7	AA64-03621A	KNOB-MASTER;28J10,ABS,HB,G3676,SVM3012		1	T0025	S.N.A
1-8	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	CIS7	S.N.A
1-9	AA64-03620A	DECORATION-POWER;28J10,ABS,HB,G3676,SVM3		1	CIS3	S.N.A
1-10	AA64-03617A	KNOB-DVD;28J10,ABS,HB,G3676,SVM3012		1	T0152	S.N.A
1-11	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		1	T0081	S.N.A
1-12	AA64-03619A	WINDOW LED;28J10,PC,CLR 1			S.N.A	
1-13	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		1	T0081	S.N.A
1-14	AA64-03618A	KNOB-FAMILY;28J10,ABS,HB,G3676,SVM3012		1	T0024	
1-15	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		3	T0081	S.N.A
2	AA94-13271A	ASSY PCB MISC-MASTER;UW21J10VDX/XEC,C18A		1	T0569	
3	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW		2	T0081	S.N.A
4	AA94-12646A	ASSY PCB MISC-A/V;,V18C 1				
5	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR		1	T0081	
6	AA91-00684B	ASSY HOLDER SPK;DP,PP,8OHM,5W,BLACK,DP,2		1	T0010	
7	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)		2	CF+MPC	S.N.A
8	AA03-00214A	CRT COLOR;A51QDX992X011,380MG,1.85MH,18.		1	T0063	
9	AA65-30017A	CLAMPER CORE-D,COIL;-,NYLON-66,V0,-,NTR,		4		S.N.A
10	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		4	SC016	S.N.A
11	AA64-03627A	CABINET BACK;21J10,HIPS,FV2,GR503		1	T0015	
12	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,		6	T0081	S.N.A
13	HA39-00290A	CBF POWER CORD;UK,H03WH2-F,AC250V,10A,2.		1	T0077	
14	AA94-13167A	ASSY PCB POWER;HARRY POTTER,21,C18A		1	T0133	
15	AA59-00324A	REMOCON;TM52,53,Harry Porter,G6148,PAL,T		1	T0074	

3-2 UW17J11VD5XXEE,XEF,XEG

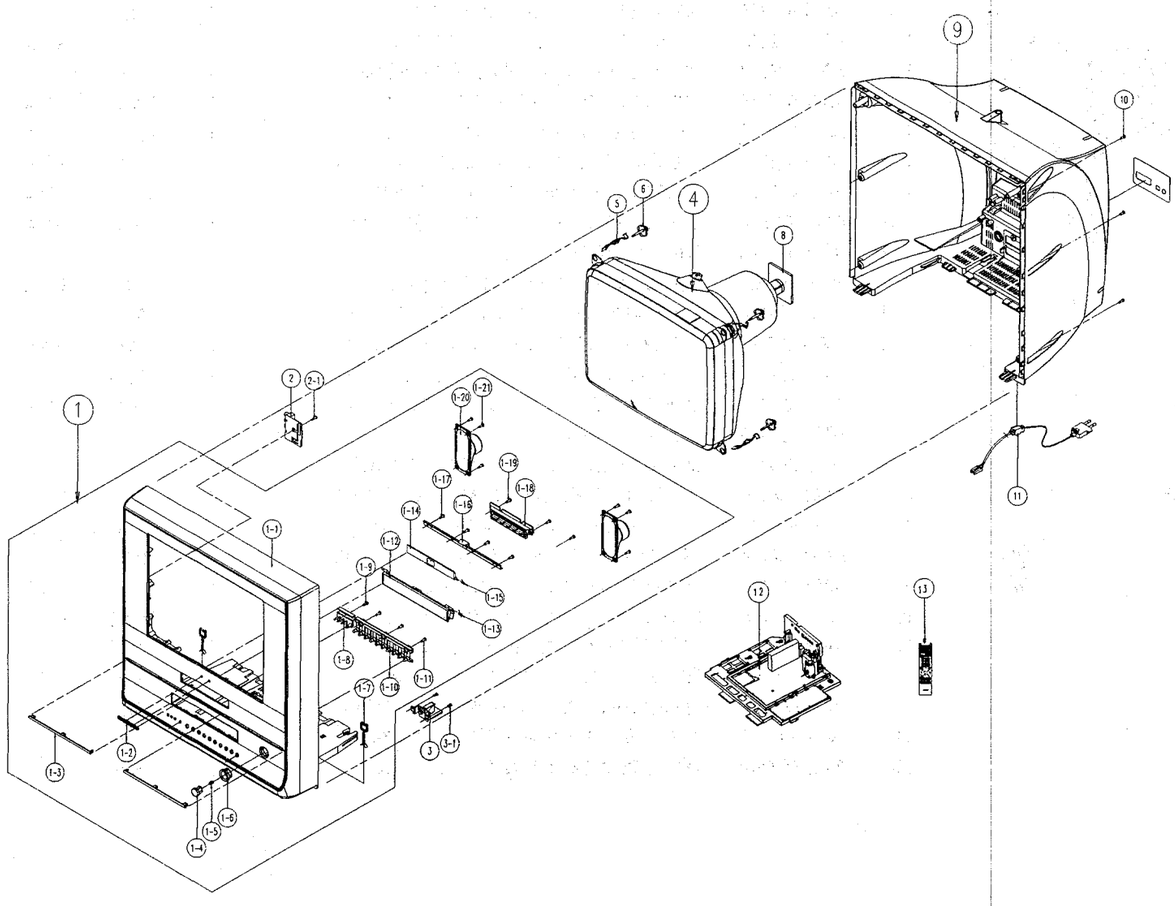

No	Code No	Description	Specification	Q'ty		Remark
1	AA96-01848A	ASSY COVER P-FRONT;17J11,HIPS HB,G4309,S		1	T0003	S.N.A
1-1	AA64-03676A	CABINET FRONT;17J11(SEH),HIPS,HB,G4309,S		1	CIS3	
1-2	AA64-70127A	BADGE-BRAND;ALL,AL,T1.4,6.3,L40,SAMSUNG,		1	T0057	S.N.A
1-3	AA64-03696A	DECORATION-COVER;17J11(SEH),ABS,HB,G3676		2	T0254	
1-4	AA64-02100H	KNOB-MASTER;17J11,ABS,HB,G3676,SVM3132		1	T0025	
1-5	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	CIS7	S.N.A
1-6	AA64-02104J	DECORATION-POWER;17J11,ABS,HB,G3676,SVM3		1	CIS3	S.N.A
1-7	AA65-00011B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		2		S.N.A
1-8	AA64-03678A	WINDOW-RMC LED;17J11(SEH),ABS,HB,G3676		1		S.N.A
1-9	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	T0081	
1-10	AA64-03679A	KNOB-FAMILY;17J11(SEH),ABS,HB,G3676,SVM3		1	T0024	
1-11	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		3	T0081	
1-12	AA64-03474E	DOOR-HOUSUNG;17J11,ABS,HB,G3676,SV012P		1	T0289	
1-13	AA61-01224A	SPRING ETC-DOOR,VCR;21J5,SUS304,T0.4		1		S.N.A
1-14	AA96-01920A	ASSY COVER P-DOOR DVD;17J11,ABS HB,SV012		1		S.N.A
1-15	AA61-01223A	SPRING ETC-DOOR,DVD;21J5,SUS304,T0.3		1	T0562	
1-16	AA61-01355A	BRACKET-FRONT;17J11,SECC,T1.0		1		S.N.A
1-17	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW		4	T0081	S.N.A
1-18	AA64-03680A	KNOB-DVD;17J11(SEH),ABS,HB,G3676,SVM3132		1	T0152	
1-19	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW		2	T0081	S.N.A
1-20	3001-001039	SPEAKER;3W,16OHM,90DB,180HZ		2	T0082	
1-21	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	T0081	
2	AA94-13276A	ASSY PCB MISC-A/V SIDE;UW17J11,C18A		1	T0091	
2-1	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	T0081	
3	AA94-13271A	ASSY PCB MISC-MASTER;UW21J10VDX/XEC,C18A		1	T0569	
3-1						
4	AA03-00392A	CRT COLOR;A41QFG692X,0MG,33MM,54.8%,FLAT		1	T0063	
5	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-		4		S.N.A
6	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-		4	SC016	S.N.A
8	AA94-13074A	ASSY PCB MISC-CRT;HARRY POTTER 21,C18A		1	T0099	
9	AA64-03677A	CABINET BACK;17J11(SEH),HIPS,FV2,GR503		1	T0015	
10	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,		6	T0081	S.N.A
11	AA96-20126J	ASSY POWER CORD;-,EP3/YES(HK),H/C 250MM,		1	T0066	S.N.A
12	AA94-13539A	ASSY PCB MAIN;UW17J11VD5XXEC,C18A		1	T0073	
13	AA59-00324A	REMOCON;53,TM52,HARRY PORTER,G6148,PAL,T		1	T0074	

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

4. Electrical Parts List

4-1 UW21J10VD5XXEG

ASSY CHASSIS

Level	Loc. No.	Code No.	Description ; Specification	Remark
1	M0017	AA91-06518A	ASSY CHASSIS;PAL	S.N.A
..2		AA94-12646A	ASSY PCB MISC-A/V;,V18C	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	JAC702	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
...3	JAC701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
...3	T0245	AA39-00070A	LEAD CONNECTOR-ASSY;,4P,200MM,YBNH250-04	
...3	T0245	AA39-20069F	LEAD CONNECTOR-ASSY;,5P,600MM,67096-005,	
...3		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3		AA97-13785A	ASSY AUTO-A/V;,V18C	S.N.A
....4	R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
....4	C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	LM55	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LM54	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LM50	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LM51	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	PCB	AA41-00893A	PCB SUB;V18C,FR-1,1,00,1.6,245*245,V18C,	S.N.A
..2	T0099	AA94-13074A	ASSY PCB MISC-CRT;HARRY POTTER 21,C18A	
⚠ ...3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
...3	T0245	AA39-20112A	LEAD CONNECTOR-ASSY;,9P,400,YBNH025-09,6	
...3	IC501	AA96-50311E	ASSY H/S;-,-,AA62-30175D,TDA6108JF,-	S.N.A
....4	T0074	1201-001330	IC-VIDEO AMP;6108,ZSIP,9P,-,SINGLE,-,PLA	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3		AA97-14146A	ASSY AUTO;PAL	S.N.A
....4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000719	DIODE-ZENER;MTZJ7.5B,7.11-7.44V,500MW,DO	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4	R075	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);200OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);200OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);200OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R512	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4	R509	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R508	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R507	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R510	2003-002007	R-METAL OXIDE(S);4.7Kohm,5%,2W,AF,TP,3.9	
....4	R513	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
....4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
....4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	L501	2701-000J02	INDUCTOR-AXIAL;100uH,10%,4298	
....4	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
....4	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm	
....4	0	AA41-00937A	PCB SUB-CRT;C18A,FR-1,1,VER.01,1.6,245*2	S.N.A
....4	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
..2	T0133	AA94-13167A	ASSY PCB POWER;HARRY POTTER,21,C18A	
...3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
...3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
...3	T0083	0402-001082	DIODE-BRIDGE;RBV406LFB,600V,4A,-,BK	
⚠ ...3	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ ...3	NT801S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
...3	P803T	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V	
...3	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,BK,15X	
⚠ ...3	CX802S	2306-000318	C-FILM,LEAD-PPF;220NF,20%,250V,BK,-,22.5	
⚠ ...3	CX801S	2306-000318	C-FILM,LEAD-PPF;220NF,20%,250V,BK,-,22.5	
⚠ ...3	CR401S	2306-000327	C-FILM,LEAD-PPF;6.3nF,3%,1.6KV,TP,28.5x1	
⚠ ...3	CR405S	2306-000166	C-FILM,LEAD-PPF;220NF,5%,400V,BK,26X17X9	
...3	C701	2401-000052	C-AL;220uF,20%,400V,GP,BK,30x35,10	
⚠ ...3	RL801S	3501-001040	RELAY-POWER;12VDC,500MW,10000MA,1FORMA,1	
⚠ ...3	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
...3	CN906	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	T0616	AA26-00167A	TRANS FBT;FQH-29A001(S),CT29D4,3.5MH,130	
⚠ ...3	T801S	AA26-00183A	TRANS SWITCHING;EER4245,V18A,90 ~264,PM5	
⚠ ...3	T401	AA26-50001M	TRANS-HORIZ.DRIVE;-,-,-,80mH,-,-,520uH,-	
...3	PFC01	AA27-00116A	COIL CHOKE;CODE_NO,-,35mH,-0, +5%,-,2.80	
...3	T0296	AA27-00122A	COIL LINEARITY;90UH,90UH,L81 DR10x10,7.5	
⚠ ...3	LX801S	AA29-30002N	FILTER LINE NOISE;-,16MH,1.5A,AC100~260V	
...3	T0245	AA39-20497B	LEAD CONNECTOR-ASSY;,1P,200,YFH800-01,RI	
...3	CN301	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	Q810	AA96-00243G	ASSY H/S;-,POWER,AA62-00045A,C2073-H2,V	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	S.N.A
...3	Q804	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,12	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-00065A	HEAT SINK-PS;DP,-,-,-,AA62-00045A,-,-,-,	S.N.A
...3	IC601	AA96-00244B	ASSY H/S;-,-,AA62-00046A,TDA7266S,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0124	1201-001308	IC-POWER AMP;7266,ZIP,15P,-,DUAL,26dB,PL	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	S.N.A
...3	IC301	AA96-00244F	ASSY H/S;-,VERTICAL,AA62-00046A,LA7841,D	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0088	1204-001807	IC-VERTICAL PROCESSO;LA7841,SIP,7P,708MI	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-00064A	HEAT SINK-PS;DP,-,-,-,AA62-00046A,-,-,-,	S.N.A
⚠ ...3	IC801S	AA96-00662C	ASSY H/S;,AA62-30171J,5Q12656RT,OIL SILI	S.N.A
....4	CIS	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0086	1203-002257	IC-PWM CONTROLLER;5Q12656RT,TO-220F-5L,5	
....4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	CIS	AA62-30171J	HEAT SINK-ES;-,-,-,SILVER,-,DREAM1,-,-,-	S.N.A
...3	Q401	AA96-00817A	ASSY H/S;,HORIZONTAL,BH62-00041A,KSC5802	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-001191	TR-POWER;KSC5802D,NPN,60000mW,TO-3P,ST,1	
....4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4		AA62-00113A	HEAT SINK;BH62-00041A,A1050S,T1.0,W23.0,	S.N.A
...3		AA97-14296A	ASSY AUTO-POWER;HARRY POTTER,21,C18A	S.N.A
⚠ 4	D833	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D834	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D835	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D848	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D403	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D405	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D406	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	

Loc. No.	Code No.	Description ; Specification	Remark
....4 D806	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D814	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D815	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4 T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4 T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,5.96-6.27V,500MW,DO	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,5.96-6.27V,500MW,DO	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,5%,1000MW,DO-41,TP	
....4 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.59-4.77V,500MW,DO	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4 DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500MW,DO	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500MW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
....4 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500MW,D	
....4 C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
....4 C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
....4 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4 T0156	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4 Q812	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4 Q602	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4 VX801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
⚠ 4 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
....4 R075	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R075	2001-000019	R-CARBON(S);100HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R125	2001-000780	R-CARBON;4700HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
....4 R075	2001-001074	R-CARBON(S);1300HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001152	R-CARBON(S);47KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001194	R-CARBON(S);82KOHM,5%,1/2W,AA,TP,2.4X6.4	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4 R802	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R823	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R436	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
....4 R306	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 R426	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
....4 R315	2004-001126	R-METAL;6.2Kohm,1%,1/8W,AA,TP,1.8x3.2m	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001403	R-METAL(S);7.5Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R435	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R425	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R424	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R304	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R305	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R405	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
....4 R824	2008-001058	R-FUSIBLE;0.18ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000374	C-CERAMIC,DISC;0.22NF,5%,50V,C0G,TP,10.5	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
....4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
....4 C598	2201-002022	C-CERAMIC,DISC;0.005NF,0.25PF,500V,C0G,T	
....4 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
....4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000261	C-FILM,LEAD-PEF;4.7nF,5%,100V,TP,10.5x12	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C807	2301-001397	C-FILM,LEAD-PPF;2.2nF,5%,1.2kV,TP,15x8.5	
....4 C2560	2305-000149	C-FILM,LEAD-PEF;100nF,5%,100V,TP,12x12.5	
....4 C2560	2305-000178	C-FILM,LEAD-PEF;10nF,5%,100V,TP,-,5mm	
....4 C2560	2305-000285	C-FILM,LEAD-PEF;220NF,5%,100V,TP,10.5X5.	
....4 C2560	2305-000382	C-FILM,LEAD-PEF;4.7nF,5%,400V,TP,-,5mm	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 C420	2306-000224	C-FILM,LEAD-PPF;47nF,5%,400V,TP,19x15.5x	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
....4 C701	2401-000287	C-AL;100uF,20%,16V,WT,TP,6.3x11,5	
....4 C701	2401-000293	C-AL;100uF,+30-10%,200V,GP,TP,16x25	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
....4 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-003058	C-AL;100uF,20%,200V,GP,16x25mm,7.5m	
....4 L308	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 L309	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 L805	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
....4 L808	2701-001007	INDUCTOR-AXIAL;24uH,10%,45140	
....4 L303	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
⚠ 4 FA801S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FA802S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
....4 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY39	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY40	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY32	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY33	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY48	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY51	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY52	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY53	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY47	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY41	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY42	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY09	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY05	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 0	AA41-00936A	PCB SUB-POWER;C18A,FR-1,1,VER.01,1.6,245	S.N.A
....4 GT12	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT11	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT10	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT09	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT05	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT06	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT07	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT08	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 D804	0401-000006	DIODE-SWITCHING;BAV21,250V,200MA,DO-35,T	
....4 R075	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R801	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R804	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R809	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
...3 Q805	BP96-00270B	ASSY HEAT SINK P;BP62-00028A,SPRING,KSC2	S.N.A
....4 CIS	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
....4 M0144	BH61-00004A	SPRING ETC-TR;CDA,CD8,SUS304,-,-,-,-,-,T	S.N.A
....4 CIS	BP62-00028A	HEAT SINK-PS;AN19IS,A1050S,T1.0,20,25,H7	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3 L806	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
..2 T0157	AA94-13266A	ASSY PCB MISC-M/DECK;UW21J10VDX/XEC,C18A	
...3 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0245	AA61-01185A	HOLDER-PCB;COMBO,HIPS V0,G4309	S.N.A
...3	AA61-01338A	HOLDER-DECK;HIPS V0,28J10,G4309,LOADER	S.N.A
...3	AA61-01339A	HOLDER-TRAY;ABS HB,28J10,BLK	S.N.A
...3	AA63-00594A	SHIELD-VCR;COMBO,SECC,T0.5	S.N.A
...3	AA63-00693A	SHIELD-DVD;28J10,SECC-1,T0.5	S.N.A
...3	AA63-00696A	SHIELD-BOTTOM;28J10,SPTE,T0.3,C18A	S.N.A
...3 T0563	AA94-12895A	ASSY PCB MISC-INTERFACE DVD;HARRY POTTER	
....4 IC104	0801-000442	IC-CMOS LOGIC;74HCU04,INVERTER,SOP,14P,1	
....4 DU410	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,100V/m	
....4 T0074	1201-001419	IC-VIDEO AMP;7660,SSOP,16P,173MIL,TRIPLE	
....4 ICD602	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
....4 CN15	3708-001879	CONNECTOR-FPC/FFC/PIC;26P,1mm,STRAIGHT,T	
....4 CN906	3711-003051	CONNECTOR-HEADER;BOX,8P,1R,2.5MM,STRAIGH	
....4 CN906	3711-003974	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 C0104	3809-001484	CABLE-FLAT;60V,80C,80mm,26P,1.000000mm,U	
....4 T0119	AA09-00104A	IC MICOM;UPD78F0034AGC-OTP,UPD78F0034AGC	
....4 M2893	AA39-00348A	LEAD CONNECTOR;V18C,UL1007#26,UL/CSA,6P,	
....4 M2893	AA39-00349A	LEAD CONNECTOR;V18C,UL1007#22,UL/CSA,6P,	
....4 T0245	AA39-20005G	LEAD CONNECTOR-ASSY;V18A,UL1007#26,UL/CS	
....4	AA97-14152A	ASSY AUTO-I/F;HARRY POTTER,28,C18A	S.N.A
.....5 DD603	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DD602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DD509	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DD104	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DD105	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DD505	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
.....5 DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
.....5 DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
.....5 C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
.....5 C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5 QD107	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
.....5 QD105	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
.....5 QD104	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
.....5 R125	2001-000278	R-CARBON;1000HM,5%,1/2W,AA,TP,3.3X9MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000628	R-CARBON;300OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R075	2001-001045	R-CARBON(S);1.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R075	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R075	2001-001055	R-CARBON(S);1.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 RD106	2003-001031	R-METAL OXIDE(S);2.4ohm,5%,2W,AF,TP,3.9x	
.....5 C598	2201-000354	C-CERAMIC,DISC;0.02NF,5%,50V,C0G,TP,5X3M	
.....5 C598	2201-000354	C-CERAMIC,DISC;0.02NF,5%,50V,C0G,TP,5X3M	
.....5 C598	2201-000472	C-CERAMIC,DISC;0.33NF,5%,50V,SL,TP,8.5X3	
.....5 C598	2201-000472	C-CERAMIC,DISC;0.33NF,5%,50V,SL,TP,8.5X3	
.....5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
.....5 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
.....5 CD312	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
.....5 C701	2401-000416	C-AL;10uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000416	C-AL;10uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
.....5 C701	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
.....5 C701	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 LD501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3070	
.....5 BD501	2701-000141	INDUCTOR-AXIAL;1000uH,5%,3070	
.....5 LD302	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2.5x3.4mm	
.....5 LD301	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2.5x3.4mm	
.....5 T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
.....5 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
.....5 SWD705	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWD704	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWD703	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWD702	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWD701	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 0	AA41-00930A	PCB SUB-INTERFACE;C18A,FR-1,1,VER.00,1.6	S.N.A
....4 M2893	BP39-00055D	LEAD CONNECTOR;V18C,UL1007#26,UL/CSA,8P,	
....4 M2893	MD39-00074G	LEAD CONNECTOR;V18C,UL1007#26,UL/CSA,12P	
...3 T0073	AA94-13347A	ASSY PCB MAIN;PAL	
....4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
....4 PTM902	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
....4 PTM901	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
....4 IC903	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
....4 IC106	1001-001114	IC-VIDEO SWITCH;TEA6425,VIDEO SWITCH ,DI	
....4 IC112	1103-001177	IC-EEPROM;24WC16,2048x8Bit,DIP,8P,-,-,2.	
....4 ICM601	1204-001422	IC-AUDIO PROCESSOR;LA72634AM,QFP,64P,400	
....4 IC118	1204-001922	IC-VIDEO PROCESS;LA71750M,QFP,100P,-,PLA	
....4 JK702	3707-001005	CONNECTOR-OPTICAL;PLUG,SM,-,4.4/2.0MM	
....4 CNM03	3708-000391	CONNECTOR-FPC/FFC/PIC;10P,1.25MM,STRAIGH	
....4 CNM01	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	
....4 CNM02	3710-001648	CONNECTOR-SOCKET;2P,1R,2.5mm,STRAIGHT,SN	
....4 CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	S.N.A
....4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
....4 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CN906	3711-004833	CONNECTOR-HEADER;BOX,12P,2R,2MM,STRAIGHT	

Loc. No.	Code No.	Description ; Specification	Remark
....4 JK701	3722-000195	JACK-SCART;42P,-,SN,BLK,NO	
....4 JK703	3722-000536	JACK-PIN;1P,3.3mm,AG,YEL,N	
....4 C0104	3809-001206	CABLE-FLAT;30V,-20to+80C,140mm,6P,1.25mm	
....4 T0119	AA09-00423A	IC MICOM;uPD78F4928,P-HPTPEUV-1000,100P,	
....4 M0018	AA97-14388A	ASSY MICOM;,C18A,TDA9394,TC_HPTP06_005,2	
....4 SWM901	AA34-20001A	SWITCH-MODE;1,25x14.6x29.8mm,BK,DC5V	
....4 SWM902	AA34-40001A	SWITCH-REC.;1EA,37.5x14.4mm,BK,DC5V	
....4 T0245	AA39-00180D	LEAD CONNECTOR-ASSY;V18A,UL1007#26,UL/CS	
....4 T0245	AA39-00180D	LEAD CONNECTOR-ASSY;V18A,UL1007#26,UL/CS	
....4 T0245	AA39-20497C	LEAD CONNECTOR-ASSY;,1P,300,YFH800-01,RI	
....4 TU01S	AA40-00050A	TUNER;TCLW3101PD18A(S),TCLW3101PD18A	
....4 REM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
....4 GPM01	AA63-00694A	GROUND-PLATE;28J10,SPTE,T0.5	S.N.A
....4 LDM902	AA91-60318A	ASSY HOLDER-LED;BLK,IR LED,HB,ABS,TS-DEC	
.....5 Q013	0601-001303	LED-IR;SIDE-VIEW,2.5mm,75mW,6V,950nm,	
.....5 HOLDER	AA61-00003A	HOLDER-LED;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
....4 SM901	AA91-60319A	ASSY HOLDER-SENSOR;BLK,TR LED,HB,ABS,TS-	
.....5 P016	0603-001011	PHOTO TR;NPN,35V,6V,50mA,75mW,BK	
.....5 T0559	AA61-00005A	HOLDER-SENSOR;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
....4 LDM901	AA96-00462A	ASSY LED GUIDE;-,-,DL-11S2R1,RED	S.N.A
....4	AA97-14297A	ASSY AUTO;CTV	S.N.A
.....5 DM804	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM805	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 RM923	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM803	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 D102	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 D201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 D901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
.....5 DZ016	0403-000717	DIODE-ZENER;MTZJ5.1B,5.1V,4.94-5.2V,500M	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5 DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
.....5 DZ016	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500MW,DO	
.....5 DZ016	0403-001373	DIODE-ZENER;MTZJ5.1A,4.85-5.03V,500MW,DO	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5 QM903	0504-000118	TR-DIGITAL;NPN,300MW,22K-22Kohm,TO-92,	
.....5 QM902	0504-000118	TR-DIGITAL;NPN,300MW,22K-22Kohm,TO-92,	
.....5 QM901	0504-000118	TR-DIGITAL;NPN,300MW,22K-22Kohm,TO-92,	
.....5 QM803	0504-000118	TR-DIGITAL;NPN,300MW,22K-22Kohm,TO-92,	
.....5 QM904	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
.....5 QM802	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
.....5 ICM903	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
.....5 R125	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-000118	R-CARBON(S);180OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R125	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KO 1M,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000534	R-CARBON;240OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000766	R-CARBON;43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000766	R-CARBON;43KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000832	R-CARBON;5100HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000878	R-CARBON;6.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
.....5 R125	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001006	R-CARBON;820HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001035	R-CARBON;910HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R107	2003-000493	R-METAL OXIDE(S);12ohm,5%,2W,AF,TP,4x12m	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	RM975	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
.....5	RM974	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
.....5	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
.....5	C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5	C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5	C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5	C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5	C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
.....5	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
.....5	C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
.....5	C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
.....5	C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
.....5	C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
.....5	C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
.....5	C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
.....5	CM205	2202-000573	C-CERAMIC,MLC-RADIAL;0.82NF,5%,50V,C0G,T	
.....5	C689	2202-000720	C-CERAMIC,MLC-AXIAL;8.2nF,20%,16V,Y5R,TP	
.....5	C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
.....5	C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
.....5	C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5	C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5	C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
.....5	C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5	C689	2202-002019	C-CERAMIC,MLC-AXIAL;68NF,10%,50V,X7R,TP,	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5	C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5	C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5	C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5	C2560	2301-000111	C-FILM,LEAD-PEF;1.8nF,5%,50V,TP,6.5x3.0x	
.....5	C2560	2301-000175	C-FILM,LEAD-PEF;15nF,5%,50V,TP,7.1x3.5x1	
.....5	C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
.....5	C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5	C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5	C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5	C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
.....5	C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
.....5	C2560	2301-000254	C-FILM,LEAD-PEF;39nF,5%,50V,TP,7.5x3.5x6	
.....5	C2560	2301-000301	C-FILM,LEAD-PEF;6.8nF,5%,50V,TP,6.5X5.5X	
.....5	C2560	2301-000314	C-FILM,LEAD-PEF;8.2nF,5%,50V,TP,6.5x3.0x	
.....5	C2560	2301-000356	C-FILM,LEAD-PEF;47nF,5%,50V,TP,7.5x4.0x6	
.....5	C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5	C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5	C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5	C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5	C2560	2301-000445	C-FILM,LEAD-PEF;4.7nF,5%,50V,TP,5.5x7x3m	
.....5	C2560	2301-000445	C-FILM,LEAD-PEF;4.7nF,5%,50V,TP,5.5x7x3m	
.....5	C229	2301-001664	C-FILM,MPE-PPF;100nF,3%,50V,TP,20x16x8.5	
.....5	C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5	C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
.....5	C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
.....5	C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5	C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5	C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5	C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5	C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5	C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5	C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5	C701	2401-000455	C-AL;10uF,20%,35V,GP,TP,4x7mm,5mm	
.....5	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5	C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5	C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5	C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5	C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002095	C-AL;47uF,20%,25V,GP,TP,6.3x5,5mm	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 LM802	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM901	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM903	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM204	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM205	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM208	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM202	2701-000111	INDUCTOR-AXIAL;100uH,10%,2534	
.....5 L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L710	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L709	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L901	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L902	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L904	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L905	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L201	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L203	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L706	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L705	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 LM902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 LM604	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 L102	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 LM601	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 LM203	2702-000120	sNDUCTOR-RADIAL;15000uH,5%,6.2x7.4mm	
.....5 LM201	2702-000166	INDUCTOR-RADIAL;47uH,5%,6x6.4mm	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 XTM201	2801-000277	CRYSTAL-UNIT;4.433619MHz,8ppm,28-AAM,S,1	
.....5 XT901	2801-003433	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,30O	
.....5 XTM901	2801-003750	CRYSTAL-UNIT;8MHZ,30PPM,28-AAA,22PF,80OH	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
.....5 SWM9083404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9093404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9103404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9113404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9123404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9033404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9043404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9053404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9063404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 SWM9073404-000244		SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 0	AA41-00934A	PCB MAIN-VCR;C18A,FR-1,1,VER.00,1.6,245X	S.N.A
.....5 GT004	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT001	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 R075	2001-003192	R-CARBON(S);0.82OHM,5%,1/2W,AA,TP,2.4X6.	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 T0724	AA94-12892A	ASSY PCB MISC-MODULE MSP;HARRY POTTER,C1	
.....5 CN906	3711-003495	CONNECTOR-HEADER;NOWALL,34P,2R,2.54MM,AN	
.....5	AA97-14021A	ASSY AUTO;PAL	S.N.A
.....6 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....6 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....6 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....6 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....6 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....6 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....6 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....6 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....6 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....6 L603	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....6 L602	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....6 L601	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....6 XT601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
.....6 A	AA97-13951A	ASSY SMD;PAL	S.N.A
.....7 D601	0401-000133	DIODE-SWITCHING;RLS4148,75V,150MA,LL-34,	
.....7 DZ016	0403-001064	DIODE-ZENER;RLZ5.1B,5.1V,4.94-5.2V,500mW	
.....7 T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,-60V,-50V,-10	
.....7 T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,-60V,-50V,-10	
.....7 IC601	1204-001925	IC-SOUND PROCESSOR;MSP3411G-B8,PLQFP,64P	
.....7 R616	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R617	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R621	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R622	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R623	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R615	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R612	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R613	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R614	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....7 R610	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R611	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R618	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R619	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R625	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R609	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....7 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R604	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R606	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R607	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R608	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....7 R620	2007-000090	R-CHIP;10KOHM,5%,1/16W,DA,TP,1608	
.....7 R626	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....7 R627	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....7 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....7 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....7 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....7 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....7 T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
.....7 T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
.....7 T0657	2203-000938	C-CER,CHIP;0.47NF,5%,50V,C0G,TP,2012	
.....7 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....7 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....7 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....7 0	AA41-00929A	PCB SUB-MSP;C18A,FR-4,2,VER.00,1.6,245X1	S.N.A
....4 T0256	AA94-13268A	ASSY PCB MISC-COMB OPTION;UW21J10,C18A	
.....5 CN906	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.54MM,AN	
.....5 PIN01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
.....5	AA97-14426S	ASSY AUTO-COMB;UW17J11VD5X,C18A	S.N.A
.....6 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....6	AA41-00952A	PCB;C18A,FR-1,1,A,1.6,245*245,C18A,36,W-	S.N.A
.....5	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
....4 T0245	AA39-00120A	LEAD CONNECTOR-ASSY;,11P,600MM,35155-110	
...3	AA96-01565A	ASSY MISC P-DVD LOADER;DSL-810,DVS KOREA	S.N.A
...3	AA96-01567A	ASSY MISC P-M DECK;C18A,6HEAD, PAL, HQ	S.N.A
...3 T0081	6003-001135	SCREW-TAPTITE;TH,+,B,M4,L15,BLK,SWRCH18A	S.N.A
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3 SPK WI	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
..2 T0569	AA94-13271A	ASSY PCB MISC-MASTER;UW21J10VDX/XEC,C18A	
...3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3 SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	
...3 CCM1	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRC1	S.N.A
...3 T0245	AA39-20179C	LEAD CONNECTOR-ASSY;,3(2)P,600MM,YFH800-	
...3 T0523	AA61-10320A	BRACKET-MASTER;T3350,SECC,T1.0,-,-,-,-	S.N.A
...3	AA97-05250A	ASSY AUTO-MASTER;DW21G5,C16A,PAL	S.N.A
....4 EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 PCB	AA41-00355A	PCB-MASTER;DW21G5,FR-1,1L,A,1.6T,245x245	S.N.A
....4 GT01A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT03A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
..2 T0066	AA96-01127B	ASSY POWER CORD;DP,AA39-10001M,CP2,H/C0	S.N.A
...3 T0077	AA39-10001M	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO	
...3	AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A

ASSY CPT

1	T0521	AA91-06863A	ASSY CPT;PAL	S.N.A
..2	T0089	AA27-00113A	COIL DEGAUSSING;-,-,4.8mH,-,48T,9ohm,-,2	
⚠ ..2	T0063	AA03-00414A	CRT COLOR;A51QDX993X011,400mG,2.47,18.0,	S.N.A
..2	A	AA98-00011B	ASSY TBC WIRE(P);-,21INCH,PAL,2P,CS-5399	S.N.A
..2	T0527	AA65-30017A	CLAMPER CORE-D,COIL;-,NYLON-66,V0,-,NTR,	S.N.A

ASSY COVER FRONT

1	M0001	AA90-04764A	ASSY COVER FRONT;21J10,C18A	S.N.A
..2	T0081	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR	
..2	CF+MPC	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2	SC016	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-	S.N.A
..2	qms	HA83-00052A	LP-TAPE-INK;,WIDTH 55 MM	S.N.A
..2	T0003	AA96-01727A	ASSY C P-FRONT;21J10,SEH,HIPS,HB,G43	
...3 CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-	S.N.A
...3 T0152	AA64-03617A	KNOB-DVD;28J10,ABS,HB,G3676,SVM3012	S.N.A
...3	AA64-03619A	WINDOW LED;28J10,PC,CLR	S.N.A
...3 T0057	AA64-70117B	BADGE-BRAND;,AL,T1.5,10.6,L65,BLK,SILVER	S.N.A
...3	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	HA83-00049A	LP-ADHESIVE-HM;12MM,NTR	S.N.A
...3 T0003	AA64-03626A	CABINET-FRONT;21J10,HIPS,HB,G4309,SV012P	S.N.A
...3 T0024	AA64-03618A	KNOB-FAMILY;28J10,ABS,HB,G3676,SVM3012	
...3 CIS3	AA64-03620A	DECORATION-POWER;28J10,ABS,HB,G3676,SVM	S.N.A
...3 T0562	AA61-01223A	SPRING ETC-DOOR,DVD;21J5,SUS304,T0.3	
...3	AA61-01224A	SPRING ETC-DOOR,VCR;21J5,SUS304,T0.4	S.N.A
...3 T0153	AA64-03473A	DOOR-TRAY;29J10,ABS HB,G3676,SV012P	
...3 T150	AA64-03474B	DOOR-HOUSING;28,29J10,ABS,G3676,HB,SV012	
...3 T0025	AA64-03621A	KNOB-MASTER;28J10,ABS,HB,G3676,SVM3012	S.N.A
...3 T0578	AA64-03660D	INLAY AV;28J10,PS SHEET,T0.3,V18C,S/T	S.N.A
...3 T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3 T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3 T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3 T0072	AA61-01343A	BRACKET-CRT;21J10,SECC,T2.0	S.N.A
...3 T0081	6003-001025	SCREW-TAPTITE;RH,+,B,M4,L20,ZPC(BLK),SWR	
..2 T0010	AA91-00684B	ASSY HOLDER SPK;DP,PP,8OHM,5W,BLACK,DP,2	
..2 T0081	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW	
..2 T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR	
..2	AA81-00129A	A/S-TAPE-INK;ALL,BLK,W100MM	S.N.A

ASSY COVER REAR

1	M0002	AA90-04767A	ASSY COVER REAR;21J10,C18A	S.N.A
..2	T0015	AA64-03627A	CABINET BACK;21J10,HIPS,FV2,GR503	
..2	T0214	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	S.N.A
..2		AA64-03622A	INLAY-BACK;28J10,PS SHEET,T0.5,BLK	S.N.A

ASSY ACCESSORY

1	M0245	AA92-08110A	ASSY ACCESSORY;UW28J10VDX/XEC,C18A,HAR	S.N.A
..2	T0074	AA59-00324A	REMOCON;TM52,53,Harry Porter,G6148,PAL,T	

ASSY P/MATERIAL

1		AA92-08276A	ASSY P/MATERIAL;21J10	S.N.A
..2	T0521	AA69-00744E	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1300,H1	S.N.A
..2		AA81-00112A	TAPE-OPP,MASKING;CRL,W75	S.N.A
...3		HA83-00058A	LP-RESIN-EPS;,CHEIL SF-301V,WHT	S.N.A
..2		HA83-00047A	LP-TAPEACETATE;T0.1MM,W20MM,L200MM	S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

4-2 UW17J11VD5XXEE

Loc. No.	Code No.	Description ; Specification	Remark

ASSY COVER FRONT

1	M0001	AA90-04851A	ASSY COVER FRONT;UW17J11VD5XXEC	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR	
..2	SC016	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-	S.N.A
..2	T0081	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,	S.N.A
..2	T0527	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-	S.N.A
..2	M0003	AA96-01848A	ASSY COVER P-FRONT;17J11,HIPS HB,G4309,S	
...3	T0082	3001-001039	SPEAKER;3W,16OHM,90DB,180HZ	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0069	AA60-00091F	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.5,-	S.N.A
...3	T0069	AA60-00091R	SPACER-FELT;,FELT,250X10,,,BLK,T0.5,,	S.N.A
...3	T0562	AA61-01223A	SPRING ETC-DOOR,DVD;21J5,SUS304,T0.3	
...3		AA61-01224A	SPRING ETC-DOOR,VCR;21J5,SUS304,T0.4	S.N.A
...3		AA61-01355A	BRACKET-FRONT;17J11,SECC,T1.0	S.N.A
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3	T0069	AA63-60002W	SPACER-FELT;-,FELT,-,-,-,BLK,T0.5,-,30X1	S.N.A
...3	T0025	AA64-02100H	KNOB-MASTER;17J11,ABS,HB,G3676,SVM3132	S.N.A
...3	CIS3	AA64-02104J	DECORATION-POWER;17J11,ABS,HB,G3676,SVM	S.N.A
...3	T0289	AA64-03474E	DOOR-HOUSUNG;17J11,ABS,HB,G3676,SV012P	S.N.A
...3	T0578	AA64-03660D	INLAY AV;28J10,PS SHEET,T0.3,BLK,V18C,S/	S.N.A
...3	CIS3	AA64-03676A	CABINET FRONT;17J11(SEH),HIPS,HB,G4309,S	S.N.A
...3		AA64-03678A	WINDOW-RMC LED;17J11(SEH),ABS,HB,G3676	S.N.A
...3	T0024	AA64-03679A	KNOB-FAMILY;17J11(SEH),ABS,HB,G3676,SVM3	S.N.A
...3	T0152	AA64-03680A	KNOB-DVD;17J11(SEH),ABS,HB,G3676,SVM3132	S.N.A
...3	T0254	AA64-03696A	DECORATION-COVER;17J11(SEH),ABS,HB,G3676	S.N.A
...3	T0057	AA64-70127A	BADGE-BRAND;ALL,AL,T1.4,6.3,L40,SAMSUNG,	S.N.A
...3		AA65-00011B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	M2893	AA39-00369A	LEAD CONNECTOR;UW17J11,UL1007#22,UL/CSA,	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA96-01920A	ASSY COVER P-DOOR DVD;17J11,ABS HB,SV012	S.N.A
....4	T0153	AA64-02814C	DOOR-TRAY;17J11,ABS,HB,G3676,SV012P	S.N.A
...3		BP61-00509A	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W20.0mm	S.N.A
..2		BP61-00495A	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W30.0mm	S.N.A

ASSY COVER REAR

1	M0002	AA90-04852A	ASSY COVER REAR;UW17J11VD5XXEC	S.N.A
..2	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
..2	T0015	AA64-03677A	CABINET BACK;17J11(SEH),HIPS,FV2,GR503	
..2	T0214	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2		AA64-03622D	INLAY-BACK;17J11,PS,T0.5,BLK,SHEET	S.N.A

ASSY CPT

1	T0521	AA91-05992J	ASSY CPT;CS17A11MJ0X,KS1A(MAC),A41QFG692	S.N.A
..2	T0521	AA91-06273A	ASSY CPT;17, KS1A(MAC),0MG,SDI-FLAT	S.N.A
⚠ ...3	T0063	AA03-00392A	CRT COLOR;A41QFG692X,0MG,2.6MH,22.2MH,4.	
...3	T0079	AA27-00002A	MAGNET CONVERGENCE;JH291-SC-OB,29.1MM,-,	
...3	T0078	AA27-00299A	DEFLECTION YOKE;,DIF-1792AA,S/T,A41QFG69	
...3		AA63-60028A	SPACER-DY;-,NEOPRENE,-,-,-,BLK,-,-,V0 W1	S.N.A
..2		AA98-70014E	ASSY TBC WIRE(P);-,16,NTSC,PAL,1P,-	S.N.A
..2	T0089	AA27-00300A	COIL DEGAUSSING;17INCH,17INCH,4.1mH,10%,	

ASSY FIXING

1		AA91-06346M	ASSY FIXING;CP2,C18A	S.N.A
..2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
⚠ ..2	T0066	AA96-20130F	ASSY POWER CORD;-,CP2/NO(4.0R),H/C 250mm	S.N.A
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10003B	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A

ASSY CHASSIS

1	M0017	AA91-07046A	ASSY CHASSIS;UW17J11VD5XXEC	S.N.A
..2	T0099	AA94-13074A	ASSY PCB MISC-CRT;HARRY POTTER 21,C18A	
⚠ ...3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
...3	IC501	AA96-50311E	ASSY H/S;-,-,AA62-30175D,TDA6108JF,-	S.N.A
....4	T0074	1201-001330	IC-VIDEO AMP;6108,ZSIP,9P,-,SINGLE,-,PLA	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3		AA97-14146A	ASSY AUTO;PAL	S.N.A
....4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000719	DIODE-ZENER;MTZJ7.5B,7.11-7.44V,500MW,DO	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R075	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);2000HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);2000HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);2000HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R512	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4	R510	2003-002007	R-METAL OXIDE(S);4.7Kohm,5%,2W,AF,TP,3.9	
....4	R513	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
....4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
....4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	L501	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
....4	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
....4	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
....4	0	AA41-00937A	PCB SUB-CRT;C18A,FR-1,1,VER.01,1.6,245*2	S.N.A
....4	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	R507	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R508	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R509	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
...3	T0245	AA39-20112A	LEAD CONNECTOR-ASSY;,9P,400,YBNH025-09,6	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
..2	T0133	AA94-13170A	ASSY PCB POWER;UW17J11VD5XXEC,PAL	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
...3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
...3	T0083	0402-001082	DIODE-BRIDGE;RBV406LFB,600V,4A,-,BK	
⚠ ...3	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ ...3	NT801S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
...3	P803T	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V	
...3	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,BK,15X	
⚠ ...3	CX801S	2306-000318	C-FILM,LEAD-PPF;220NF,20%,250V,BK,-,22.5	
...3	C701	2401-000052	C-AL;220uF,20%,400V,GP,BK,30x35,10	
⚠ ...3	RL801S	3501-001040	RELAY-POWER;12VDC,500MW,10000MA,1FORMA,1	
...3	CN15	3708-001879	CONNECTOR-FPC/FFC/PIC;26P,1mm,STRAIGHT,T	
...3	CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	S.N.A
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	C0104	3809-001484	CABLE-FLAT;60V,80C,80mm,26P,1.000000mm,U	

Loc. No.	Code No.	Description ; Specification	Remark
⚠ ...3 T801S	AA26-00183A	TRANS SWITCHING;EER4245,V18A,90 ~264,PM5	
⚠ ...3 T401	AA26-50001M	TRANS-HORIZ.DRIVE;-,-,-,80mH,-,-,520uH,-	
...3 T0296	AA27-00122A	COIL LINEARITY;90UH,90UH,L81 DR10x10,7.5	
⚠ ...3 LX801S	AA29-30002N	FILTER LINE NOISE;-,16MH,1.5A,AC100~260V	
...3 CN301	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 Q810	AA96-00243G	ASSY H/S;-,POWER,AA62-00045A,C2073-H2,V1	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3 Q804	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3 IC301	AA96-00244F	ASSY H/S;-,VERTICAL,AA62-00046A,LA7841,D	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0088	1204-001807	IC-VERTICAL PROCESSO;LA7841,SIP,7P,708MI	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
⚠ ...3 IC801S	AA96-00662C	ASSY H/S;,AA62-30171J,5Q12656RT,OIL SILI	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0086	1203-002257	IC-PWM CONTROLLER;5Q12656RT,TO-220F-5L,5	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA62-30171J	HEAT SINK-ES;-,-,-,SILVER,-,DREAM1,-,-,-	S.N.A
...3 Q401	AA96-00817A	ASSY H/S;,HORIZONTAL,BH62-00041A,KSC5802	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-001191	TR-POWER;KSC5802D,NPN,60000mW,TO-3P,ST,1	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4	AA62-00113A	HEAT SINK;BH62-00041A,A1050S,T1.0,W23.0,	S.N.A
...3	AA97-14394A	ASSY AUTO;UW17J11VD5XXEU,C18A	S.N.A
....4 DD104	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4 D848	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4 D835	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4 D834	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 DD505	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 DD509	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 DD601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 DD602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 DD603	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D403	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D405	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D406	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D806	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D814	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D815	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D833	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4 D804	0401-000006	DIODE-SWITCHING;BAV21,250V,200MA,DO-35,T	
....4 T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4 T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4 T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,5.96-6.27V,500MW,DO	
....4 DZ016	0403-000700	DIODE-ZENER;TZP33A,5%,1000MW,DO-41,TP	
....4 DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
....4 DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
....4 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.59-4.77V,500MW,DO	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4 DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
....4 DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500MW,DO	
....4 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500MW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
....4 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
....4 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500MW,D	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
....4 C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
....4 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4 T0156	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4 T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4 QD107	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
....4 QD105	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
....4 QD106	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4 QD104	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4 Q812	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4 Q602	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
....4 ICD602	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
....4 R075	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
....4 R075	2001-000019	R-CARBON(S);100HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;1000H

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000628	R-CARBON;3000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;4700HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R075	2001-001055	R-CARBON(S);1.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001074	R-CARBON(S);1300HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4 R823	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R802	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 RD106	2003-001031	R-METAL OXIDE(S);2.4ohm,5%,2W,AF,TP,3.9x	
....4 R809	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R804	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R801	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R436	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
....4 R306	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 R426	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
....4 R315	2004-001126	R-METAL;6.2Kohm,1%,1/8W,AA,TP,1.8x3.2m	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001403	R-METAL(S);7.5Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R304	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R305	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R405	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
....4 R435	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000374	C-CERAMIC,DISC;0.22NF,5%,50V,C0G,TP,10.5	
....4 C598	2201-000472	C-CERAMIC,DISC;0.33NF,5%,50V,SL,TP,8.5X3	
....4 C598	2201-000472	C-CERAMIC,DISC;0.33NF,5%,50V,SL,TP,8.5X3	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
....4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
....4 C598	2201-002022	C-CERAMIC,DISC;0.005NF,0.25PF,500V,C0G,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,	
....4 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
....4 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
....4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000261	C-FILM,LEAD-PEF;4.7nF,5%,100V,TP,10.5x12	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C807	2301-001397	C-FILM,LEAD-PPF;2.2nF,5%,1.2kV,TP,15x8.5	
....4 C2560	2305-000149	C-FILM,LEAD-PEF;100nF,5%,100V,TP,12x12.5	
....4 C2560	2305-000178	C-FILM,LEAD-PEF;10nF,5%,100V,TP,-,5mm	
....4 C2560	2305-000285	C-FILM,LEAD-PEF;220NF,5%,100V,TP,10.5X5.	
....4 C2560	2305-000382	C-FILM,LEAD-PEF;4.7nF,5%,400V,TP,-,5mm	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 CD312	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000293	C-AL;100uF,+30-10%,200V,GP,TP,16x25	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
....4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11.5	
....4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5	
....4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6,3x11,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	

Loc. No.		Code No.	Description ; Specification	Remark
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4	C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4	C701	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
....4	C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4	C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4	C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4	C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4	C701	2401-003058	C-AL;100uF,20%,200V,WT,TP,16x25,7.5	
....4	LD501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3070	
....4	L308	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	L309	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LD601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	L805	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
....4	BD501	2701-000141	INDUCTOR-AXIAL;1000uH,5%,3070	
....4	LD301	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2534	
....4	LD302	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2534	
....4	L808	2701-001007	INDUCTOR-AXIAL;24uH,10%,45140	
....4	L303	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
....4	LD101	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
....4	XTD601	2801-004301	CRYSTAL-UNIT;7.372800MHz,30ppm,28-AAA,20	
....4	F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
⚠ 4	FA801S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4	FA802S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
⚠ 4	FA803S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
....4	F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4	F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4	CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
....4	EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4	EY33	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY51	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY39	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY40	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY41	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY42	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
....4	EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY61	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY62	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY63	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	GT08	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT09	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT10	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT11	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT12	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT05	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT06	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT07	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT604	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT605	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4	C420	2301-001258	C-FILM,LEAD-PPF;39nF,5%,400V,TP,19.5x9x1	
....4	R024	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4		AA97-14371A	ASSY SMD-POWER;17 HARRY POTTER,C18A	S.N.A
.....5	IC104	0801-000442	IC-CMOS LOGIC;74HCU04,INVERTER,SOP,14P,1	
.....5	DU410	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,100V/m	
.....5	T0074	1201-001419	IC-VIDEO AMP;7660,SSOP,16P,173MIL,TRIPLE	
.....5	M0018	AA97-14662A	ASSY MICOM;C18A,UPD78F0034AGC,P_HPTPEUD_	
.....6	T0119	AA09-00104A	IC MICOM;UPD78F0034AGC-OTP,UPD78F0034AGC	
⚠ 4	VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 4	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
....4	FT401	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,0.36	
....4	FT402	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,0.36	
....4	R024	2004-001384	R-METAL(S);150Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4	R424	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4	R425	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4	CN906	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
....4	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4	CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
....4	R075	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R075	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R075	2001-003019	R-CARBON(S);0.39OHM,10%,1/2W,AA,TP,2.4X6	
....4	0	AA41-00953B	PCB SUB;UW17J11,FR-1,1.00,1.6,C18A,1.PO/	S.N.A
....4	C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4	C701	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
....4	C701	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3	Q805	BP96-00270B	ASSY HEAT SINK P;BP62-00028A,SPRING,KSC2	S.N.A
....4	CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4	T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
....4	M0144	BH61-00004A	SPRING ETC-TR;CDA,CDB,SUS304,-,-,-,-,T	S.N.A
....4	CIS	BP62-00028A	HEAT SINK-PS;AN19IS,A1050S,T1.0,20,25,H7	S.N.A
⚠ ...3	CR405S	2306-000166	C-FILM,LEAD-PPF;220NF,5%,400V,BK,26X17X9	
...3	M2893	AA39-00367A	LEAD CONNECTOR;UW17J11,UL1007#26,UL/CSA,	
⚠ ...3	CR401S	2306-000329	C-FILM,LEAD-PPF;7NF,3%,1.6KV,BK,28.5X18.	
...3		AA96-01565A	ASSY MISC P-DVD LOADER;DSL-810,DVS KOREA	S.N.A
...3	T0616	AA26-00199A	TRANS FBT;FQH29A001A,KS1C,3.4MH,FERRITE,	
...3	IC601	AA96-50397A	ASSY H/S;-,-,AA62-30180J,TDA7266S,-	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0124	1201-001308	IC-POWER AMP;7266,ZIP,15P,-,DUAL,26dB,PL	
....4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA62-30180J	HEAT SINK-ES;-,A6063 EXTR,-,WHT,-,-,-,40	S.N.A
⚠ ...3	FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
...3		AA65-30104C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2	T0569	AA94-13271A	ASSY PCB MISC-MASTER;UW21J10VDX/XEC,C18A	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	CCM1	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
...3	T0523	AA61-10320A	BRACKET-MASTER;T3350,SECC,T1.0,-,-,-,-	S.N.A
...3		AA97-05250A	ASSY AUTO-MASTER;DW21G5,C16A,PAL	S.N.A
....4	EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	GT01A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT02A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT03A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	PCB	AA41-00355A	PCB-MASTER;DW21G5,FR-1,1L,A,1.6T,245x245	S.N.A
...3	T0245	AA39-20179C	LEAD CONNECTOR-ASSY;,3(2)P,600MM,YFH800-	
⚠ ...3	SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	
..2	T0091	AA94-13276A	ASSY PCB MISC-A/V SIDE;UW17J11,C18A	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	JAC702	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
...3	JAC701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
...3	T0245	AA39-20499B	LEAD CONNECTOR-ASSY;,4P,200,YBNH025-04,S	
...3		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3		AA97-14461A	ASSY AUTO-A/V SIDE;UW17J11,C18A	S.N.A
....4	R075	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
....4	C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
....4	C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	LM55	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LM54	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LM51	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	LM50	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,,50	
....4	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,,50	
....4	PCB	AA41-00893A	PCB SUB;V18C,FR-1,1.00,1.6,245*245,V18C,	S.N.A
...3	T0245	AA39-20069D	LEAD CONNECTOR-ASSY;,5P,300,YBNH025-05,6	
..2	T0157	AA94-13456A	ASSY PCB MISC-M/DECK;UW17J11VD5XXEC,C18A	
...3	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3	T0081	6003-001022	SCREW-TAPTITE;RH,+,B,M3,L12,ZPC(BLK),SWR	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3		AA61-01339A	HOLDER-TRAY;ABS HB,28J10,BLK	S.N.A
...3	T0070	AA61-01349A	HOLDER-CHASSIS;17J11(SEH),HIPS V0,G4309	S.N.A
...3		AA61-01350A	HOLDER-DECK;17J11(SEH),HIPS V0,G4309	S.N.A
...3		AA63-00696A	SHIELD-BOTTOM;28J10,SPTE,T0.3,C18A	S.N.A
...3		AA63-00700A	SHIELD-DVD;17J11,SECC T0.5	S.N.A
...3		AA63-00701A	SHIELD-DECK;17J11,SECC T0.5	S.N.A
...3	T0724	AA94-12892A	ASSY PCB MISC-MODULE MSP;HARRY POTTER,C1	
....4	CN906	3711-003495	CONNECTOR-HEADER;NOWALL,34P,2R,2.54MM,AN	
....4		AA97-14021A	ASSY AUTO;PAL	S.N.A
.....5	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	L603	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....5	L602	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....5	L601	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....5	XT601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
.....5		AA97-13951A	ASSY SMD;PAL	S.N.A
.....6	D601	0401-000133	DIODE-SWITCHING;RLS4148,75V,150MA,LL-34,	
.....6	DZ016	0403-001064	DIODE-ZENER;RLZ5.1B,4.94-5.2V,500MW,LL-3	
.....6	IC601	1204-001925	IC-SOUND PROCESSOR;MSP3411G-B8,PLQFP,64P	
.....6	R616	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R617	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R621	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R622	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R623	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R615	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R612	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R613	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R614	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R610	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R611	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R618	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R619	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R625	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R609	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R604	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R606	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R607	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R608	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R620	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6	T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6	T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6	T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6	T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6	T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
.....6	T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
.....6	T0657	2203-000938	C-CER,CHIP;0.47NF,5%,50V,C0G,TP,2012	
.....6	T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....6	T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....6	T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....6	0	AA41-00929A	PCB SUB-MSP;C18A,FR-4,2,VER.00,1.6,245X1	S.N.A
.....6	T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	
.....6	T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	
.....6	R626	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6	R627	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6	R628	2007-001024	R-CHIP;560Kohm,5%,1/8W,TP,2012	
.....6	R629	2007-001024	R-CHIP;560Kohm,5%,1/8W,TP,2012	
.....6	T0657	2203-000323	C-CER,CHIP;12nF,10%,50V,X7R,TP,2012,-	
.....6	T0657	2203-000323	C-CER,CHIP;12nF,10%,50V,X7R,TP,2012,-	
.....6		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5	C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....5	C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	T0256	AA94-13268A	ASSY PCB MISC-COMB OPTION;UW21J10,C18A	
....4	CN906	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.5MM,ANG	
....4	PIN01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
....4		AA97-14426S	ASSY AUTO-COMB;UW17J11VD5X,C18A	S.N.A
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	0	AA41-00952A	PCB;C18A,FR-1,1,A,1.6,245*245,C18A,36,W-	S.N.A
....4		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	T0073	AA94-13539A	ASSY PCB MAIN;UW17J11VD5XXEC,C18A	
....4		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
....4	PTM902	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
....4	PTM901	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
....4	IC903	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
....4	IC106	1001-001114	IC-VIDEO SWITCH;TEA6425,VIDEO SWITCH ,DI	
....4	IC112	1103-001177	IC-EEPROM;24WC16,2048x8Bit,DIP,8P,-,-,2.	
....4	JK702	3707-001005	CONNECTOR-OPTICAL;PLUG,SM,-,4.4/2.0MM	
....4	CNM03	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	
....4	CNM01	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	

Loc. No.	Code No.	Description ; Specification	Remark
....4 CNM02	3710-001648	CONNECTOR-SOCKET;2P,1R,2.5mm,STRAIGHT,SN	
....4 CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	S.N.A
....4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
....4 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CN906	3711-004833	CONNECTOR-HEADER;BOX,12P,2R,2MM,STRAIGHT	
....4 JK703	3722-000536	JACK-PIN;1P,3.3mm,AG,YEL,N	
....4 C0104	3809-001206	CABLE-FLAT;30V,-20to+80C,140mm,6P,1.25mm	
....4 SWM90	AA34-20001A	SWITCH-MODE;1,25x14.6x29.8mm,BK,DC5V	
....4 SWM90	AA34-40001A	SWITCH-REC.;1EA,37.5x14.4mm,BK,DC5V	
....4 M2893	AA39-00120J	LEAD CONNECTOR;V54A/SMV-25X5N,UL1007#26,	
....4 T0245	AA39-00180C	LEAD CONNECTOR-ASSY;TF20P1,UL1007#26,UL/	
....4 T0245	AA39-00180D	LEAD CONNECTOR-ASSY;V18A,UL1007#26,UL/CS	
⚠ 4 TU01S	AA40-00050A	TUNER;TCLW3101PD18A(S),TCLW3101PD18A(S),	
....4 GPM01	AA63-00694A	GROUND-PLATE;28J10,SPTE,T0.5	S.N.A
....4 LDM902	AA91-60318A	ASSY HOLDER-LED;BLK,IR LED,HB,ABS,TS-DEC	
.....5 Q013	0601-001303	LED-IR;SIDE-VIEW,2.5mm,75mW,6V,950nm,	
.....5	AA61-00003A	HOLDER-LED;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
....4 SM901	AA91-60319A	ASSY HOLDER-SENSOR;BLK,TR LED,HB,ABS,TS-	
.....5 P016	0603-001011	PHOTO TR;NPN,35V,6V,50mA,75mW,BK	
.....5 T0559	AA61-00005A	HOLDER-SENSOR;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
....4 LDM901	AA96-00462A	ASSY LED GUIDE;-,-,DL-11S2R1,RED	S.N.A
....4	AA97-14401A	ASSY AUTO;UW17J11VD5XXEU,C18A	S.N.A
.....5 DM804	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM805	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 RM923	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM803	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 D102	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 D201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 D901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 DM201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
.....5 DZ016	0403-000717	DIODE-ZENER;MTZJ5.1B,4.94-5.2V,500MW,DO-	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5 DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
.....5 DZ016	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500MW,DO	
.....5 DZ016	0403-001373	DIODE-ZENER;MTZJ5.1A,4.85-5.03V,500MW,DO	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5 QM903	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5 QM902	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5 QM901	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5 QM803	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5 QM904	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
.....5 QM802	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
.....5 ICM903	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
.....5 R125	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-000118	R-CARBON(S);180OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R125	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000534	R-CARBON;240OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5	R107	2003-000493	R-METAL OXIDE(S);12ohm,5%,2W,AF,TP,4x12m	
.....5	RM975	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
.....5	RM974	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
.....5	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
.....5	C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5	C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5	C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5	C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
.....5 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
.....5 C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
.....5 C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
.....5 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
.....5 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
.....5 C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
.....5 CM205	2202-000573	C-CERAMIC,MLC-RADIAL;0.82NF,5%,50V,C0G,T	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000720	C-CERAMIC,MLC-AXIAL;8.2nF,20%,16V,Y5R,TP	
.....5 C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
.....5 C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
.....5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
.....5 C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
.....5 C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5 C689	2202-002009	C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5	
.....5 C689	2202-002019	C-CERAMIC,MLC-AXIAL;68NF,10%,50V,X7R,TP,	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5 C2560	2301-000111	C-FILM,LEAD-PEF;1.8nF,5%,50V,TP,6.5x3.0x	
.....5 C2560	2301-000175	C-FILM,LEAD-PEF;15nF,5%,50V,TP,7.1x3.5x1	
.....5 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
.....5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5 C2560	2301-000254	C-FILM,LEAD-PEF;39nF,5%,50V,TP,7.5x3.5x6	
.....5 C2560	2301-000301	C-FILM,LEAD-PEF;6.8nF,5%,50V,TP,6.5X5.5X	
.....5 C2560	2301-000314	C-FILM,LEAD-PEF;8.2nF,5%,50V,TP,6.5x3.0x	
.....5 C2560	2301-000356	C-FILM,LEAD-PEF;47nF,5%,50V,TP,7.5x4.0x6	
.....5 C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5 C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5 C229	2301-001664	C-FILM,LEAD-OTHER;100nF,3%,50V,TP,20x16x	
.....5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000411	C-FILM,LEAD-PEF;470nF,5%,50V,TP,7.3x4.8x	
.....5 C2560	2305-000411	C-FILM,LEAD-PEF;470nF,5%,50V,TP,7.3x4.8x	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C914	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
.....5 CM217	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002095	C-AL;47uF,20%,25V,GP,TP,6.3x5,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 LM802	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM901	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM903	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM208	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM205	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM204	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM202	2701-000111	INDUCTOR-AXIAL;100uH,10%,2534	
.....5 L710	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L709	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L901	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L902	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L904	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L905	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L201	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L203	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L706	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L705	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5 LM902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 LM604	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 L102	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5 XTM201	2801-000277	CRYSTAL-UNIT;4.433619MHz,8ppm,28-AAM,S,1	
.....5 XTM901	2801-003750	CRYSTAL-UNIT;8MHZ,30PPM,28-AAA,22PF,80OH	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,.50	
.....5 SWM9083404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9093404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9103404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9113404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9123404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9033404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9043404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9053404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9063404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 SWM9073404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 GT001	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT004	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 R075	2001-003192	R-CARBON(S);0.82OHM,5%,1/2W,AA,TP,2.4X6.	
.....5	AA97-14376A	ASSY SMD;C18A,UW17J11	S.N.A
.....6 IC118	1204-001922	IC-VIDEO PROCESS;LA71750M,QFP,100P,-,PLA	
.....6 M0018	AA97-14388A	ASSY MICOM;,C18A,TDA9394,TC_HPTP06_005,2	
.....7 T0119	AA09-00239A	IC MICOM;TDA9394-OTP,80,3.3V&8V,12MHZ,UO	
.....6 T0119	AA09-00423A	IC MICOM;uPD78F4928,P-HPTPEUV-1000,100P,	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 LM201	2702-000166	INDUCTOR-RADIAL;47uH,5%,6.0x6.4mm	
.....5 LM203	2702-000120	INDUCTOR-RADIAL;15000uH,5%,6.2x7.4mm	
.....5 0	AA41-00934C	PCB MAIN;UW17J11,FR-1,1,00,1.6,330X245,C	S.N.A
....4 M2893	MD39-00074B	LEAD CONNECTOR;P57A/SVP-55W9HT,UL1007#26	
....4 JK701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
....4 T0245	AA39-00184A	LEAD CONNECTOR-ASSY;,1P,300MM,YFH800-01,	
....4 T0245	AA39-20016D	LEAD CONNECTOR-ASSY;,3P,500,67096-003,S,	
....4 M2893	BP39-00055A	LEAD CONNECTOR;P57A/SVP-55WHT,UL1007#26,	
....4 XT901	2801-004033	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
....4 REM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
...3	AA96-01905A	ASSY MISC P-M DECK;C18A, SVTK-M4P/BON,4H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
..2 T0098	AA94-13458A	ASSY PCB MISC-CONTROL;HARRY POTTER 17,C	
...3 T0245	AA39-20070D	LEAD CONNECTOR-ASSY;,7P,150,YBNH025-07,6	
...3	AA97-14402A	ASSY AUTO;CTV	S.N.A
....4 SWD702	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4 SWD703	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4 SWD704	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4 SWD701	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4 SWD705	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4 M0119	AA41-00955A	PCB CONTROL;UW21J10,FR-1,1,00,1.6,330X24	S.N.A
...3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A

ASSY P/MATERIAL

1	AA92-08471A	ASSY P/MATERIAL;17J11	S.N.A
..2	6902-000001	BAG AIR;LDPE,T0.2,L1800,W1000,TRP,,LDPE	S.N.A
..2	6902-000005	BAG PE;HDPE/NITRON/HDPE,T0.015/T0.5/T0.0	S.N.A
..2	6902-000061	BAG AIR;LDPE,T0.2,L1000,W500,TRP,,	S.N.A
..2 T0214	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A

ASSY ACCESSORY;

1 M0245	AA92-08758A	ASSY ACCESSORY;UW17J11VD5XXEE,C18A	S.N.A
..2 1	6801-001014	CARD-REGISTRATION;XEU,ENG,MOJO100,L150,WS.N.A	
..2	6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2 T0074	AA59-00324A	REMOCON;53,TM52,HARRY PORTER,G6148,PAL,T	
..2 M0596	AA68-03227A	MANUAL USERS-00;UW17J11,UW17J11VD5XXEE,N	
S.N.A			

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

4-3 UW17J11VD5XXEF

Loc. No.	Code No.	Description ; Specification	Remark

ASSY COVER FRONT

1	M0001	AA90-04851A	ASSY COVER FRONT;UW17J11VD5XXEC	S.N.A
2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
2	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR	
2	SC016	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-	S.N.A
2	T0081	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,	S.N.A
2	T0527	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-	S.N.A
2	M0003	AA96-01848A	ASSY COVER P-FRONT;17J11,HIPS HB,G4309,S	
3	T0082	3001-001039	SPEAKER;3W,16OHM,90DB,180HZ	
3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
3	T0069	AA60-00091F	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.5,-	S.N.A
3	T0069	AA60-00091R	SPACER-FELT;,FELT,250X10,,,BLK,T0.5,,	S.N.A
3	T0562	AA61-01223A	SPRING ETC-DOOR,DVD;21J5,SUS304,T3	
3		AA61-01224A	SPRING ETC-DOOR,VCR;21J5,SUS304,T0.4	S.N.A
3		AA61-01355A	BRACKET-FRONT;17J11,SECC,T1.0	S.N.A
3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
3	T0069	AA63-60002W	SPACER-FELT;-,FELT,-,-,-,BLK,T0.5,-,30X1	S.N.A
3	T0025	AA64-02100H	KNOB-MASTER;17J11,ABS,HB,G3676,SVM3132	S.N.A
3	CIS3	AA64-02104J	DECORATION-POWER;17J11,ABS,HB,G3676,SVM3	S.N.A
3	T0289	AA64-03474E	DOOR-HOUSUNG;17J11,ABS,HB,G3676,SV012P	S.N.A
3	T0578	AA64-03660D	INLAY AV;28J10,PS SHEET,T3,BLK,V18C,S/	S.N.A
3	CIS3	AA64-03676A	CABINET FRONT;17J11(SEH),HIPS,HB,G4309,S	S.N.A
3		AA64-03678A	WINDOW-RMC LED;17J11(SEH),ABS,HB,G3676	S.N.A
3	T0024	AA64-03679A	KNOB-FAMILY;17J11(SEH),ABS,HB,G3676,SVM3	S.N.A
3	T0152	AA64-03680A	KNOB-DVD;17J11(SEH),ABS,HB,G3676,SVM3132	S.N.A
3	T0254	AA64-03696A	DECORATION-COVER;17J11(SEH),ABS,HB,G3676	S.N.A
3	T0057	AA64-70127A	BADGE-BRAND;ALL,AL,T1.4,6.3,L40,SAMSUNG,	S.N.A
3		AA65-00011B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
3	M2893	AA39-00369A	LEAD CONNECTOR;UW17J11,UL1007#22,UL/CSA,	
3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
3		AA96-01920A	ASSY COVER P-DOOR DVD;17J11,ABS HB,SV012	S.N.A
4	T0153	AA64-02814C	DOOR-TRAY;17J11,ABS,HB,G3676,SV012P	S.N.A
3		BP61-00509A	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W20.0mm	S.N.A
2		BP61-00495A	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W30.0mm	S.N.A

ASSY COVER REAR

1	M0002	AA90-04852A	ASSY COVER REAR;UW17J11VD5XXEC	S.N.A
2	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
2	T0015	AA64-03677A	CABINET BACK;17J11(SEH),HIPS,FV2,GR503	
2	T0214	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
2		AA64-03622D	INLAY-BACK;17J11,PS,T0.5,BLK,SHEET	S.N.A

ASSY CPT

1	T0521	AA91-05992J	ASSY CPT;CS17A11MJ0X,KS1A(MAC),A41QFG692	S.N.A
2	T0521	AA91-06273A	ASSY CPT;17, KS1A(MAC),0MG,SDI-FLAT	S.N.A
⚠ 3	T0063	AA03-00392A	CRT COLOR;A41QFG692X,0MG,2.6MH,22.2MH,4.	
3	T0079	AA27-00002A	MAGNET CONVERGENCE;JH291-SC-0B,29.1MM,-,	
3	T0078	AA27-00299A	DEFLECTION YOKE;,DIF-1792AA,S/T,A41QFG69	
3		AA63-60028A	SPACER-DY;-,NEOPRENE,-,-,-,BLK,-,-,V0 W1	S.N.A
2		AA98-70014E	ASSY TBC WIRE(P);-,16,NTSC,PAL,1P,-	S.N.A
2	T0089	AA27-00300A	COIL DEGAUSSING;17INCH,17INCH,4.1mH,10%,	

ASSY CHASSIS

1	M0017	AA91-07412A	ASSY CHASSIS;UW17J11VD5XXEF,C18A	S.N.A
2	T0099	AA94-13074A	ASSY PCB MISC-CRT;HARRY POTTER 21,C18A	
⚠ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
3	IC501	AA96-50311E	ASSY H/S;-,-,AA62-30175D,TDA6108JF,-	S.N.A
4	T0074	1201-001330	IC-VIDEO AMP;6108,ZSIP,9P,-,SINGLE,-,PLA	
4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
3		AA97-14146A	ASSY AUTO;PAL	S.N.A
4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ016	0403-000719	DIODE-ZENER;MTZJ7.5B,7.11-7.44V,500MW,DO	
4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R075	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-001102	R-CARBON(S);2000HM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-001102	R-CARBON(S);2000HM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-001102	R-CARBON(S);2000HM,5%,1/2W,AA,TP,2.4X6.4	
4	R512	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
4	R510	2003-002007	R-METAL OXIDE(S);4.7Kohm,5%,2W,AF,TP,3.9	
4	R513	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
4	L501	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
4	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
4	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
4	0	AA41-00937A	PCB SUB-CRT;C18A,FR-1,1,VER.01,1.6,245*2	S.N.A
4	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4	GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4	R507	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
4	R508	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
4	R509	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
3	T0245	AA39-20112A	LEAD CONNECTOR-ASSY;,9P,400,YBNH025-09,6	
3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
2	T0133	AA94-13170A	ASSY PCB POWER;UW17J11VD5XXEC,PAL	
3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
3	T0083	0402-001082	DIODE-BRIDGE;RBV406LFB,600V,4A,-,BK	
⚠ 3	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ 3	NT801S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
3	P803T	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V	
3	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,BK,15X	
⚠ 3	CX801S	2306-000318	C-FILM,LEAD-PPF;220NF,20%,250V,BK,-,22.5	
3	C701	2401-000052	C-AL;220uF,20%,400V,GP,BK,30x35,10	
⚠ 3	RL801S	3501-001040	RELAY-POWER;12VDC,500MW,10000MA,1FORMA,1	
3	CN15	3708-001879	CONNECTOR-FPC/FFC/PIC;26P,1mm,STRAIGHT,T	
3	CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
3	CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	S.N.A
3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
3	C0104	3809-001484	CABLE-FLAT;60V,80C,80mm,26P,1.000000mm,U	
⚠ 3	T801S	AA26-00183A	TRANS SWITCHING;EER4245,V18A,90 ~264,PM5	
⚠ 3	T401	AA26-50001M	TRANS-HORIZ.DRIVE;-,-,-,80mH,-,-,520uH,-	
3	T0296	AA27-00122A	COIL LINEARITY;90UH,90UH,L81 DR10x10,7.5	
⚠ 3	LX801S	AA29-30002N	FILTER LINE NOISE;-,16MH,1.5A,AC100~260V	
3	CN301	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
3	Q810	AA96-00243G	ASSY H/S;-,POWER,AA62-00045A,C2073-H2,V1	S.N.A
4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
4	T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
3	Q804	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
4	T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
3	IC301	AA96-00244F	ASSY H/S;-,VERTICAL,AA62-00046A,LA7841,D	S.N.A
4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
4	T0088	1204-001807	IC-VERTICAL PROCESSO;LA7841,SIP,7P,708MI	
4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
4		AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
⚠ 3	IC801S	AA96-00662C	ASSY H/S;,AA62-30171J,5Q12656RT,OIL SILI	S.N.A
4	CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
4	T0086	1203-002257	IC-PWM CONTROLLER;5Q12656RT,TO-220F-5L,5	
4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
4	CIS	AA62-30171J	HEAT SINK-ES;-,-,-,SILVER,-,DREAM1,-,-,-	S.N.A
3	Q401	AA96-00817A	ASSY H/S;,HORIZONTAL,BH62-00041A,KSC5802	S.N.A
4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
4	T0090	0502-001191	TR-POWER;KSC5802D,NPN,60000mW,TO-3P,ST,1	
4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
4		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
4		AA62-00113A	HEAT SINK;BH62-00041A,A1050S,T1.0,W23.0,	S.N.A
3		AA97-14394A	ASSY AUTO;UW17J11VD5XXEU,C18A	S.N.A
4	DD104	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D848	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D835	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D834	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	DD505	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	DD509	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	DD601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	DD602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	DD603	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D403	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D405	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D406	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D806	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D814	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D815	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D833	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
4	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,200MA,DO-35,T	
4	T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
4	T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
4	T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
4	DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,5.96-6.27V,500MW,DO	
4	DZ016	0403-000700	DIODE-ZENER;TZP33A,5%,1000MW,DO-41,TP	
4	DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
4	DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
4	DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.59-4.77V,500MW,DO	
4	DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
4	DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
4	DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
4	DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
4	DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500MW,DO	
4	DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500MW,D	
4	DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
4	DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
4	DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500MW,D	
4	C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
4	C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
4	T0156	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
4	T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
4	QD107	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	

Loc. No.		Code No.	Description ; Specification	Remark
4	QD105	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
4	QD106	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
4	QD104	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
4	Q812	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
4	Q602	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
4	IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
4	ICD602	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
4	R075	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
4	R075	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
4	R075	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
4	R075	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
4	R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R075	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
4	R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R125	2001-000281	R-CARBON;100O

Loc. No.	Code No.	Description ; Specification	Remark
4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000628	R-CARBON;300OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R075	2001-001055	R-CARBON(S);1.8KOHM,5%,1/2W,AA,TP,2.4X6.	
4 R075	2001-001074	R-CARBON(S);130OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
4 R075	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
4 R075	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
4 R075	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
4 R823	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
4 R802	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
4 RD106	2003-001031	R-METAL OXIDE(S);2.4ohm,5%,2W,AF,TP,3.9x	
4 R809	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
4 R804	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
4 R801	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
4 R436	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
4 R306	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
4 R426	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
4 R315	2004-001126	R-METAL;6.2Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
4 R024	2004-001403	R-METAL(S);7.5Kohm,1%,1/2W,AA,TP,2.4x6.4	
4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
4 R024	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
4 R304	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
4 R305	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
4 R405	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
4 R435	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
4 C598	2201-000374	C-CERAMIC,DISC;0.22NF,5%,50V,C0G,TP,10.5	
4 C598	2201-000472	C-CERAMIC,DISC;33NF,5%,50V,SL,TP,8.5X3	
4 C598	2201-000472	C-CERAMIC,DISC;33NF,5%,50V,SL,TP,8.5X3	
4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	

Loc. No.	Code No.	Description ; Specification	Remark
4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
4 C598	2201-002022	C-CERAMIC,DISC;0.005NF,0.25PF,500V,C0G,T	
4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
4 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
4 C689	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,	
4 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
4 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
4 C2560	2301-000261	C-FILM,LEAD-PEF;4.7nF,5%,100V,TP,10.5x12	
4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
4 C807	2301-001397	C-FILM,LEAD-PPF;2.2nF,5%,1.2kV,TP,15x8.5	
4 C2560	2305-000149	C-FILM,LEAD-PEF;100nF,5%,100V,TP,12x12.5	
4 C2560	2305-000178	C-FILM,LEAD-PEF;10nF,5%,100V,TP,-,5mm	
4 C2560	2305-000285	C-FILM,LEAD-PEF;220NF,5%,100V,TP,10.5X5.	
4 C2560	2305-000382	C-FILM,LEAD-PEF;4.7nF,5%,400V,TP,-,5mm	
4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
4 CD312	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
4 C701	2401-000293	C-AL;100uF,+30-10%,200V,GP,TP,16x25	
4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
4 C701	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
4 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
4 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
4 C701	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
4 C701	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
4 C701	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
4 C701	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	

Loc. No.	Code No.	Description ; Specification	Remark
4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
4 C701	2401-003058	C-AL;100uF,20%,200V,WT,TP,16x25,7.5	
4 LD501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3070	
4 L308	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 L309	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 LD601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 L805	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
4 BD501	2701-000141	INDUCTOR-AXIAL;1000uH,5%,3070	
4 LD301	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2534	
4 LD302	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2534	
4 L808	2701-001007	INDUCTOR-AXIAL;24uH,10%,45140	
4 L303	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
4 LD101	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
4 XTD601	2801-004301	CRYSTAL-UNIT;7.372800MHz,30ppm,28-AAA,20	
4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
⚠ 4 FA801S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FA802S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
⚠ 4 FA803S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
4 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
4 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
4 EY33	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY51	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY39	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY40	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY41	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY42	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY61	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY62	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY63	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 GT08	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT09	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT10	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT11	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT12	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT05	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT06	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT07	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT604	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT605	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
4 C420	2301-001258	C-FILM,LEAD-PPF;39nF,5%,400V,TP,19.5x9x1	
4 R024	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
4	AA97-14371A	ASSY SMD-POWER;17 HARRY POTTER,C18A	S.N.A
5 IC104	0801-000442	IC-CMOS LOGIC;74HCU04,INVERTER,SOP,14P,1	
5 DU410	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,100V/m	
5 T0074	1201-001419	IC-VIDEO AMP;7660,SSOP,16P,173MIL,TRIPLE	
5 M0018	AA97-14662A	ASSY MICOM;C18A,UPD78F0034AGC,P_HPTPEUD_	
6 T0119	AA09-00104A	IC MICOM;UPD78F0034AGC-OTP,UPD78F0034AGC	
⚠ 4 VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 4 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
4 FT401	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,36	
4 FT402	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,36	
4 R024	2004-001384	R-METAL(S);150Kohm,1%,1/2W,AA,TP,2.4x6.4	
4 R424	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
4 R425	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
4 CN906	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
4 CN906	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
4 CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
4 R075	2001-000117	R-CARBON(S);680HM,5%,1/2W,AA,TP,2.4X6.4M	
4 R075	2001-001153	R-CARBON(S);470HM,5%,1/2W,AA,TP,2.4X6.4M	
4 R075	2001-003019	R-CARBON(S);390HM,10%,1/2W,AA,TP,2.4X6	
4 0	AA41-00953B	PCB SUB;UW17J11,FR-1,1,00,1.6,C18A,1,PO/	S.N.A
4 C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7.5	
4 C701	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
4 C701	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
3 Q805	BP96-00270B	ASSY HEAT SINK P;BP62-00028A,SPRING,KSC2	S.N.A
4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
4 T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
4 M0144	BH61-00004A	SPRING ETC-TR;CDA,CDB,SUS304,-,-,-,-,-,T	S.N.A
4 CIS	BP62-00028A	HEAT SINK-PS;AN19IS,A1050S,T1.0,20,25,H7	S.N.A
⚠ 3 CR405S	2306-000166	C-FILM,LEAD-PPF;220NF,5%,400V,BK,26X17X9	
3 M2893	AA39-00367A	LEAD CONNECTOR;UW17J11,UL1007#26,UL/CSA,	
⚠ 3 CR401S	2306-000329	C-FILM,LEAD-PPF;7NF,3%,1.6KV,BK,28.5X18.	
3	AA96-01565A	ASSY MISC P-DVD LOADER;DSL-810,DVS KOREA	S.N.A
3 T0616	AA26-00199A	TRANS FBT;FQH29A001A,KS1C,3.4MH,FERRITE,	
3 IC601	AA96-50397A	ASSY H/S;-,-,AA62-30180J,TDA7266S,-	S.N.A
4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
4 T0124	1201-001308	IC-POWER AMP;7266,ZIP,15P,-,DUAL,26dB,PL	
4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
4	AA62-30180J	HEAT SINK-ES;-,A6063 EXTR,-,WHT,-,-,-,40	S.N.A
⚠ 3 FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
3	AA65-30104C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
2 T0569	AA94-13271A	ASSY PCB MISC-MASTER;UW21J10VDX/XEC,C18A	
3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
3 CCM1	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1	S.N.A
3 T0523	AA61-10320A	BRACKET-MASTER;T3350,SECC,T1.0,-,-,-	S.N.A
3	AA97-05250A	ASSY AUTO-MASTER;DW21G5,C16A,PAL	S.N.A
4 EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
4 GT01A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT02A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT03A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
4 PCB	AA41-00355A	PCB-MASTER;DW21G5,FR-1,1L,A,1.6T,245x245	S.N.A
3 T0245	AA39-20179C	LEAD CONNECTOR-ASSY;,3(2)P,600MM,YFH800-	

Loc. No.	Code No.	Description ; Specification	Remark
3 SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	
2 T0091	AA94-13276A	ASSY PCB MISC-A/V SIDE;UW17J11,C18A	
3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
3 JAC702	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
3 JAC701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
3 T0245	AA39-20499B	LEAD CONNECTOR-ASSY;,4P,200,YBNH025-04,S	
3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
3	AA97-14461A	ASSY AUTO-A/V SIDE;UW17J11,C18A	S.N.A
4 R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
4 R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
4 C689	2202-000231	C-CERAMIC,MLC-AXIAL;33NF,10%,50V,Y5P,T	
4 C689	2202-000231	C-CERAMIC,MLC-AXIAL;33NF,10%,50V,Y5P,T	
4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
4 LM55	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 LM54	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 LM51	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 LM50	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
4 PCB	AA41-00893A	PCB SUB;V18C,FR-1,1,00,1.6,245*245,V18C,	S.N.A
3 T0245	AA39-20069D	LEAD CONNECTOR-ASSY;,5P,300,YBNH025-05,6	
2 T0098	AA94-13458A	ASSY PCB MISC-CONTROL;HARRY POTTER 17,C	
3 T0245	AA39-20070D	LEAD CONNECTOR-ASSY;,7P,150,YBNH025-07,6	
3	AA97-14402A	ASSY AUTO;CTV	S.N.A
4 SWD702	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
4 SWD703	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
4 SWD704	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
4 SWD701	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
4 SWD705	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
4 M0119	AA41-00955A	PCB CONTROL;UW21J10,FR-1,1,00,1.6,330X24	S.N.A
3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
2 T0157	AA94-13476A	ASSY PCB MISC-M/DECK;UW17J11VD5XXEF,C18A	
3 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
3 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
3 T0081	6003-001022	SCREW-TAPTITE;RH,+,B,M3,L12,ZPC(BLK),SWR	S.N.A
3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
3	AA61-01339A	HOLDER-TRAY;ABS HB,28J10,BLK	S.N.A
3 T0070	AA61-01349A	HOLDER-CHASSIS;17J11(SEH),HIPS V0,G4309	S.N.A
3	AA61-01350A	HOLDER-DECK;17J11(SEH),HIPS V0,G4309	S.N.A
3	AA63-00696A	SHIELD-BOTTOM;28J10,SPTE,T3,C18A	S.N.A
3	AA63-00700A	SHIELD-DVD;17J11,SECC T0.5	S.N.A
3	AA63-00701A	SHIELD-DECK;17J11,SECC T0.5	S.N.A
3 T0724	AA94-12892A	ASSY PCB MISC-MODULE MSP;HARRY POTTER,C1	
4 CN906	3711-003495	CONNECTOR-HEADER;NOWALL,34P,2R,2.54MM,AN	
4	AA97-14021A	ASSY AUTO;PAL	S.N.A
5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 L603	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
5 L602	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
5 L601	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
5 XT601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
5	AA97-13951A	ASSY SMD;PAL	S.N.A
6 D601	0401-000133	DIODE-SWITCHING;RLS4148,75V,150MA,LL-34,	
6 DZ016	0403-001064	DIODE-ZENER;RLZ5.1B,4.94-5.2V,500MW,LL-3	
6 IC601	1204-001925	IC-SOUND PROCESSOR;MSP3411G-B8,PLQFP,64P	
6 R616	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R617	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R621	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R622	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R623	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R615	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R612	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R613	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R614	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
6 R610	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R611	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R618	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R619	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R625	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R609	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R604	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R606	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R607	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R608	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
6 R620	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
6 T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
6 T0657	2203-000938	C-CER,CHIP;0.47NF,5%,50V,C0G,TP,2012	
6 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
6 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
6 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
6 0	AA41-00929A	PCB SUB-MSP;C18A,FR-4,2,VER.00,1.6,245X1	S.N.A
6 T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	
6 T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	
6 R626	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
6 R627	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
6 R628	2007-001024	R-CHIP;560Kohm,5%,1/8W,TP,2012	
6 R629	2007-001024	R-CHIP;560Kohm,5%,1/8W,TP,2012	
6 T0657	2203-000323	C-CER,CHIP;12nF,10%,50V,X7R,TP,2012,-	
6 T0657	2203-000323	C-CER,CHIP;12nF,10%,50V,X7R,TP,2012,-	
6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
3 T0256	AA94-13268A	ASSY PCB MISC-COMB OPTION;UW21J10,C18A	
4 CN906	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.5MM,ANG	
4 PIN01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T3,-,-,-,-	S.N.A
4	AA97-14426S	ASSY AUTO-COMB;UW17J11VD5X,C18A	S.N.A
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 0	AA41-00952A	PCB;C18A,FR-1,1,A,1.6,245*245,C18A,36,W-	S.N.A
4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
3 T0073	AA94-13733A	ASSY PCB MAIN;CS	
4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
4 PTM901	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
4 PTM902	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
4 IC903	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
4 IC106	1001-001114	IC-VIDEO SWITCH;TEA6425,VIDEO SWITCH ,DI	
4 IC112	1103-001177	IC-EEPROM;24WC16,2048x8Bit,DIP,8P,-,-,2.	
4 XT901	2801-004033	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,30O	
4 JK702	3707-001005	CONNECTOR-OPTICAL;PLUG,SM,-,4.4/2.0MM	
4 CNM01	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	
4 CNM03	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	
4 CNM02	3710-001648	CONNECTOR-SOCKET;2P,1R,2.5mm,STRAIGHT,SN	
4 CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
4 CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
4 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
4 CN906	3711-004833	CONNECTOR-HEADER;BOX,12P,2R,2MM,STRAIGHT	
4 JK701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
4 JK703	3722-000536	JACK-PIN;1P,3.3mm,AG,YEL,N	
4 C0104	3809-001206	CABLE-FLAT;30V,-20to+80C,140mm,6P,1.25mm	
4 SWM901	AA34-20001A	SWITCH-MODE;1,25x14.6x29.8mm,BK,DC5V	
4 SWM902	AA34-40001A	SWITCH-REC.;1EA,37.5x14.4mm,BK,DC5V	
4 M2893	AA39-00120J	LEAD CONNECTOR;V54A/SMV-25X5N,UL1007#26,	
4 T0245	AA39-00180C	LEAD CONNECTOR-ASSY;TF20P1,UL1007#26,UL/	
4 T0245	AA39-00180D	LEAD CONNECTOR-ASSY;V18A,UL1007#26,UL/CS	
4 T0245	AA39-00184A	LEAD CONNECTOR-ASSY;,1P,300MM,YFH800-01,	
4 T0245	AA39-20016D	LEAD CONNECTOR-ASSY;,3P,500,67096-003,S,	
⚠ 4 TU01S	AA40-00050A	TUNER;TCLW3101PD18A(S),TCLW3101PD18A(S),	
4 GPM01	AA63-00694A	GROUND-PLATE;28J10,SPTE,T0.5	S.N.A
4 LDM902	AA91-60318A	ASSY HOLDER-LED;BLK,IR LED,HB,ABS,TS-DEC	
5 Q013	0601-001303	LED-IR;SIDE-VIEW,2.5mm,75mW,6V,950nm,	
5	AA61-00003A	HOLDER-LED;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
4 SM901	AA91-60319A	ASSY HOLDER-SENSOR;BLK,TR LED,HB,ABS,TS-	
5 P016	0603-001011	PHOTO TR;NPN,35V,6V,50mA,75mW,BK	
5 T0559	AA61-00005A	HOLDER-SENSOR;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
4 LDM901	AA96-00462A	ASSY LED GUIDE;-,-,DL-11S2R1,RED	S.N.A
4	AA97-14592A	ASSY AUTO-MAIN;UW17J11VD5XXEF,C18A	S.N.A
5 DM804	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 DM805	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 DM901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 RM923	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 DM803	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 D102	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 D201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 D901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 DM201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
5 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
5 DZ016	0403-000717	DIODE-ZENER;MTZJ5.1B,4.94-5.2V,500MW,DO-	
5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
5 DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
5 DZ016	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500MW,DO	
5 DZ016	0403-001373	DIODE-ZENER;MTZJ5.1A,4.85-5.03V,500MW,DO	
5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
5 T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
5 T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
5 T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
5 T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
5 QM903	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
5 QM902	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
5 QM901	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
5 QM803	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
5 QM904	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
5 QM802	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
5 ICM903	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-PLASTIC	
5 R125	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
5 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
5 R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
5 R075	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
5 R075	2001-000118	R-CARBON(S);180OHM,5%,1/2W,AA,TP,2.4X6.4	
5 R125	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000435	R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000534	R-CARBON;240OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
5	R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R125	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
5	R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
5	R075	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
5	R075	2001-003192	R-CARBON(S);0.82OHM,5%,1/2W,AA,TP,2.4X6.	
5	R107	2003-000493	R-METAL OXIDE(S);12ohm,5%,2W,AF,TP,4x12m	
5	RM974	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
5	RM975	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
5	C598	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50V,Y5V,TP,4	
5	C598	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50V,Y5V,TP,4	

Loc. No.	Code No.	Description ; Specification	Remark
5 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
5 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
5 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
5 C689	2202-000231	C-CERAMIC,MLC-AXIAL;33NF,10%,50V,Y5P,T	
5 C689	2202-000231	C-CERAMIC,MLC-AXIAL;33NF,10%,50V,Y5P,T	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
5 C689	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
5 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
5 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
5 C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
5 C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
5 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
5 CM205	2202-000573	C-CERAMIC,MLC-RADIAL;0.82NF,5%,50V,C0G,T	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
5 C689	2202-000720	C-CERAMIC,MLC-AXIAL;8.2nF,20%,16V,Y5R,TP	
5 C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
5 C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
5 C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
5 C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
5 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
5 C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
5 C689	2202-002009	C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5	
5 C689	2202-002019	C-CERAMIC,MLC-AXIAL;68NF,10%,50V,X7R,TP,	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	

Loc. No.	Code No.	Description ; Specification	Remark
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
5 C2560	2301-000111	C-FILM,LEAD-PEF;1.8nF,5%,50V,TP,6.5x3.0x	
5 C2560	2301-000175	C-FILM,LEAD-PEF;15nF,5%,50V,TP,7.1x3.5x1	
5 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
5 C2560	2301-000254	C-FILM,LEAD-PEF;39nF,5%,50V,TP,7.5x3.5x6	
5 C2560	2301-000301	C-FILM,LEAD-PEF;6.8nF,5%,50V,TP,6.5X5.5X	
5 C2560	2301-000314	C-FILM,LEAD-PEF;8.2nF,5%,50V,TP,6.5x3.0x	
5 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
5 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
5 C2560	2301-000356	C-FILM,LEAD-PEF;47nF,5%,50V,TP,7.5x4.0x6	
5 C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
5 C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
5 C229	2301-001664	C-FILM,LEAD-OTHER;100nF,3%,50V,TP,20x16x	
5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
5 C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
5 C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
5 C2560	2305-000411	C-FILM,LEAD-PEF;470nF,5%,50V,TP,7.3x4.8x	
5 C2560	2305-000411	C-FILM,LEAD-PEF;470nF,5%,50V,TP,7.3x4.8x	
5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
5 CM217	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
5 C914	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
5 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-000665	C-AL;2.2uF,20%,50V,GP,TP,3.5x5,5	
5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
5 C701	2401-001334	C-AL;0.47UF,20%,50V,GP,TP,5X11,2.5	
5 C701	2401-001334	C-AL;0.47UF,20%,50V,GP,TP,5X11,2.5	
5 C701	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
5 C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	

Loc. No.	Code No.	Description ; Specification	Remark
5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
5 C701	2401-002095	C-AL;47uF,20%,25V,GP,TP,6.3x5,5	
5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
5 LM802	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
5 LM901	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
5 LM903	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
5 LM208	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
5 LM205	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
5 LM204	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
5 LM202	2701-000111	INDUCTOR-AXIAL;100uH,10%,2534	
5 LM210	2701-000112	INDUCTOR-AXIAL;100uH,10%,3070	
5 L707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L709	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L710	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L901	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L902	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L904	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L905	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L201	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L203	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L706	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L705	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
5 LM902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
5 LM604	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
5 L102	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
5 LM203	2702-000120	INDUCTOR-RADIAL;15000uH,5%,6.2x7.4mm	
5 LM201	2702-000166	INDUCTOR-RADIAL;47uH,5%,6.0x6.4mm	
5 XTM201	2801-000277	CRYSTAL-UNIT;4.433619MHz,8ppm,28-AAM,S,1	
5 XTM901	2801-003750	CRYSTAL-UNIT;8MHZ,30PPM,28-AAA,22PF,80OH	
5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
5 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
5 SWM908	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM909	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM910	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM911	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM912	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM903	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM904	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM905	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 SWM906	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	

Loc. No.	Code No.	Description ; Specification	Remark
5 SWM907	3404-001252	SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
5 GT004	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
5 GT001	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
5	AA97-14559A	ASSY SMD;UW1711VD5XXEF,SECAM,C18A	S.N.A
6 ICM202	1204-001921	IC-CHROMA;LA70100M,SOP,30P,375MIL,PLASTI	
6 IC118	1204-001922	IC-VIDEO PROCESS;LA71750M,QFP,100P,-,PLA	
6 M0018	AA97-14388A	ASSY MICOM;,C18A,TDA9394,TC_HPTP06_005,2	
7 T0119	AA09-00239A	IC MICOM;TDA9394-OTP,80,3.3V&8V,12MHZ,UO	
6 T0119	AA09-00423A	IC MICOM;uPD78F4928,P-HPTPEUV-1000,100P,	
5 0	AA41-00934C	PCB MAIN;UW17J11,FR-1,1,00,1.6,330X245,C	S.N.A
4 M2893	BP39-00055A	LEAD CONNECTOR;P57A/SVP-55WHT,UL1007#26,	
4 M2893	MD39-00074B	LEAD CONNECTOR;P57A/SVP-55W9HT,UL1007#26	
4 REM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
3	AA96-01905A	ASSY MISC P-M DECK;C18A, SVTK-M4P/BON,4H	S.N.A

ASSY P/MATERIAL

1	AA92-08471A	ASSY P/MATERIAL;17J11	S.N.A
2	6902-000001	BAG AIR;LDPE,T0.2,L1800,W1000,TRP,,,LDPE	S.N.A
2	6902-000005	BAG PE;HDPE/NITRON/HDPE,T0.015/T0.5/T0.0	S.N.A
2	6902-000061	BAG AIR;LDPE,T0.2,L1000,W500,TRP,,,	S.N.A
2 T0214	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A

ASSY ACCESSORY

1 M0245	AA92-08755A	ASSY ACCESSORY;CS	S.N.A
2 1	6801-001016	CARD-REGISTRATION;XEF,FRENCH,MOJO100,L15	S.N.A
2	6902-000009	BAG PE;HDPE,T0.03,L400,W240,TRP,8,2,PE M	S.N.A
2 T0074	AA59-00324A	REMOCON;53,TM52,HARRY PORTER,G6148,PAL,T	
2 M0596	AA68-03195A	MANUAL USERS-00;UW17J11,SEH,FRE,EUROPE,WS	S.N.A
2 0	BN68-00514A	MANUAL-WARRANTY CARD;PDP/LCD TV,EN,FR,DE	S.N.A

ASSY FIXING

1	AA91-06346M	ASSY FIXING;CP2,C18A	S.N.A
2	AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	S.N.A
2	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
⚠ 2 T0066	AA96-20130F	ASSY POWER CORD;-,CP2/NO(4.0R),H/C 250mm	S.N.A
3	3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
3 T0077	AA39-10003B	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO	
3	AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

4-4 UW17J11VD5XXEG

Loc. No.	Code No.	Description ; Specification	Remark

ASSY COVER FRONT

1	M0001	AA90-04851A	ASSY COVER FRONT;UW17J11VD5XXEC	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR	
..2	SC016	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-	S.N.A
..2	T0081	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,	S.N.A
..2	T0527	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-	S.N.A
..2	M0003	AA96-01848A	ASSY COVER P-FRONT;17J11,HIPS HB,G4309,S	
...3	T0082	3001-001039	SPEAKER;3W,16OHM,90DB,180HZ	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0069	AA60-00091F	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.5,-	S.N.A
...3	T0069	AA60-00091R	SPACER-FELT;,FELT,250X10,,,BLK,T0.5,,	S.N.A
...3	T0562	AA61-01223A	SPRING ETC-DOOR,DVD;21J5,SUS304,T0.3	
...3		AA61-01224A	SPRING ETC-DOOR,VCR;21J5,SUS304,T0.4	S.N.A
...3		AA61-01355A	BRACKET-FRONT;17J11,SECC,T1.0	S.N.A
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3	T0069	AA63-60002W	SPACER-FELT;-,FELT,-,-,-,BLK,T0.5,-,30X1	S.N.A
...3	T0025	AA64-02100H	KNOB-MASTER;17J11,ABS,HB,G3676,SVM3132	S.N.A
...3	CIS3	AA64-02104J	DECORATION-POWER;17J11,ABS,HB,G3676,SV	S.N.A
...3	T0289	AA64-03474E	DOOR-HOUSUNG;17J11,ABS,HB,G3676,SV012P	S.N.A
...3	T0578	AA64-03660D	INLAY AV;28J10,PS SHEET,T0.3,BLK,V18C,S/	S.N.A
...3	CIS3	AA64-03676A	CABINET FRONT;17J11(SEH),HIPS,HB,G4309,S	S.N.A
...3		AA64-03678A	WINDOW-RMC LED;17J11(SEH),ABS,HB,G3676	S.N.A
...3	T0024	AA64-03679A	KNOB-FAMILY;17J11(SEH),ABS,HB,G3676,SVM3	S.N.A
...3	T0152	AA64-03680A	KNOB-DVD;17J11(SEH),ABS,HB,G3676,SVM3132	S.N.A
...3	T0254	AA64-03696A	DECORATION-COVER;17J11(SEH),ABS,HB,G3676	S.N.A
...3	T0057	AA64-70127A	BADGE-BRAND;ALL,AL,T1.4,6.3,L40,SAMSUNG,	S.N.A
...3		AA65-00011B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2	S.N.A
...3	M2893	AA39-00369A	LEAD CONNECTOR;UW17J11,UL1007#22,UL/CSA,	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA96-01920A	ASSY COVER P-DOOR DVD;17J11,ABS HB,SV012	S.N.A
....4	T0153	AA64-02814C	DOOR-TRAY;17J11,ABS,HB,G3676,SV012P	S.N.A
...3		BP61-00509A	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W20.0m	S.N.A
..2		BP61-00495A	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W30.0m	S.N.A

ASSY COVER REAR

1	M0002	AA90-04852A	ASSY COVER REAR;UW17J11VD5XXEC	S.N.A
..2	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
..2	T0015	AA64-03677A	CABINET BACK;17J11(SEH),HIPS,FV2,GR503	
..2	T0214	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2		AA64-03622D	INLAY-BACK;17J11,PS,T0.5,BLK,SHEET	S.N.A

ASSY CPT

1	T0521	AA91-05992J	ASSY CPT;CS17A11MJ0X,KS1A(MAC),A41QFG62	S.N.A
..2	T0521	AA91-06273A	ASSY CPT;17, KS1A(MAC),0MG,SDI-FLAT	S.N.A
⚠ ...3	T0063	AA03-00392A	CRT COLOR;A41QFG692X,0MG,2.6MH,22.2MH,4.	
...3	T0079	AA27-00002A	MAGNET CONVERGENCE;JH291-SC-OB,29.1MM,-,	
...3	T0078	AA27-00299A	DEFLECTION YOKE;,DIF-1792AA,S/T,A41QFG69	
...3		AA63-60028A	SPACER-DY;-,NEOPRENE,-,-,-,BLK,-,-,V0 W1	S.N.A
..2		AA98-70014E	ASSY TBC WIRE(P);-,16,NTSC,PAL,1P,-	S.N.A
..2	T0089	AA27-00300A	COIL DEGAUSSING;17INCH,17INCH,4.1mH, i0%.	

ASSY CHASSIS

1	M0017	AA91-07046A	ASSY CHASSIS;UW17J11VD5XXEC	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
..2	T0099	AA94-13074A	ASSY PCB MISC-CRT;HARRY POTTER 21,C18A	
⚠ ...3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	
...3	IC501	AA96-50311E	ASSY H/S;-,-,AA62-30175D,TDA6108JF,-	S.N.A
....4	T0074	1201-001330	IC-VIDEO AMP;6108,ZSIP,9P,-,SINGLE,-,PLA	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3		AA97-14146A	ASSY AUTO;PAL	S.N.A
....4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000719	DIODE-ZENER;MTZJ7.5B,7.11-7.44V,500MW,DO	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R075	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);200OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);200OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-001102	R-CARBON(S);200OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R512	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4	R510	2003-002007	R-METAL OXIDE(S);4.7Kohm,5%,2W,AF,TP,3.9	
....4	R513	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
....4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
....4	C2560	2305-000704	C-FILM,LEAD-PEF;100nF,5%,250V,TP,16.5x10	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	L501	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
....4	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
....4	SG501	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
....4	0	AA41-00937A	PCB SUB-CRT;C18A,FR-1,1,VER.01,1.6,245*2	S.N.A
....4	GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	R507	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R508	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R509	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
...3	T0245	AA39-20112A	LEAD CONNECTOR-ASSY;,9P,400,YBNH025-09,6	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
..2	T0133	AA94-13170A	ASSY PCB POWER;UW17J11VD5XXEC,PAL	
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
...3	T0083	0402-000586	DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD	
...3	T0083	0402-001082	DIODE-BRIDGE;RBV406LFB,600V,4A,-,BK	
⚠ ...3	PC801S	0604-001038	PHOTO-COUPLER;TR,130-260%,200mW,DIP-4,ST	
⚠ ...3	NT801S	1404-001045	THERMISTOR-NTC;4.7ohm,15%,2900K,35.0mW,T	
...3	P803T	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V	
...3	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,BK,15X	
⚠ ...3	CX801S	2306-000318	C-FILM,LEAD-PPF;220NF,20%,250V,BK,-,22.5	
...3	C701	2401-000052	C-AL;220uF,20%,400V,GP,BK,30x35,10	
⚠ ...3	RL801S	3501-001040	RELAY-POWER;12VDC,500MW,10000MA,1FORMA,1	
...3	CN15	3708-001879	CONNECTOR-FPC/FFC/PIC;26P,1mm,STRAIGHT,T	
...3	CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGHS	N.A
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	C0104	3809-001484	CABLE-FLAT;60V,80C,80mm,26P,1.000000mm,U	
⚠ ...3	T801S	AA26-00183A	TRANS SWITCHING;EER4245,V18A,90 ~264,PM5	
⚠ ...3	T401	AA26-50001M	TRANS-HORIZ.DRIVE;-,-,-,80mH,-,-,520uH,-	
...3	T0296	AA27-00122A	COIL LINEARITY;90UH,90UH,L81 DR10x10,7.5	
⚠ ...3	LX801S	AA29-30002N	FILTER LINE NOISE;-,16MH,1.5A,AC100~260V	
...3	CN301	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	Q810	AA96-00243G	ASSY H/S;-,POWER,AA62-00045A,C2073-H2,V1	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3	Q804	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
...3	IC301	AA96-00244F	ASSY H/S;-,VERTICAL,AA62-00046A,LA7841,D	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0088	1204-001807	IC-VERTICAL PROCESSO;LA7841,SIP,7P,708MI	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
⚠ ...3	IC801S	AA96-00662C	ASSY H/S;,AA62-30171J,5Q12656RT,OIL SILI	S.N.A
....4	CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4	T0086	1203-002257	IC-PWM CONTROLLER;5Q12656RT,TO-220F-5L,5	
....4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	CIS	AA62-30171J	HEAT SINK-ES;-,-,-,SILVER,-,DREAM1,-,-,-	S.N.A
...3	Q401	AA96-00817A	ASSY H/S;,HORIZONTAL,BH62-00041A,KSC5802	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-001191	TR-POWER;KSC5802D,NPN,60000mW,TO-3P,ST,1	
....4	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4		AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4		AA62-00113A	HEAT SINK;BH62-00041A,A1050S,T1.0,W23.0,	S.N.A
...3		AA97-14394A	ASSY AUTO;UW17J11VD5XXEU,C18A	S.N.A
....4	DD104	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D848	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D835	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
⚠ 4	D834	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	DD505	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	DD509	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	DD601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	DD602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	DD603	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D403	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D405	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D406	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D601	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D602	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D806	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D814	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D815	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D833	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
....4	D804	0401-000006	DIODE-SWITCHING;BAV21,250V,200MA,DO-35,T	
....4	T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4	T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4	T0083	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-15,T	
....4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4	T0083	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-,TP	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,5.96-6.27V,500MW,DO	
....4	DZ016	0403-000700	DIODE-ZENER;TZP33A,5%,1000MW,DO-41,TP	
....4	DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
....4	DZ016	0403-000714	DIODE-ZENER;MTZJ3.3B,3.32-3.53V,500MW,DO	
....4	DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.59-4.77V,500MW,DO	
....4	DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4	DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4	DZ016	0403-001167	DIODE-ZENER;MTZJ30D,29.02-30.51V,500MW,D	
....4	DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
....4	DZ016	0403-001322	DIODE-ZENER;MTZJ8.2B,7.78-8.19V,500MW,DO	
....4	DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500MW,D	
....4	DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
....4	DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.75-23.73V,500MW,D	
....4	DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500MW,D	
....4	C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
....4	C1Z	0404-000156	DIODE-SCHOTTKY;RB441Q,40V,350MA,DO-34,TP	
....4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
....4	T0156	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-	
....4	T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	T0156	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
....4	QD107	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
....4	QD105	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	

Loc. No.		Code No.	Description ; Specification	Remark
....4	QD106	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4	QD104	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4	Q812	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4	Q602	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
....4	IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
....4	ICD602	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
....4	R075	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R075	2001-000019	R-CARBON(S);100HM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R075	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R075	2001-000028	R-CARBON(S);1000HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R075	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000515	R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000628	R-CARBON;3000HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000780	R-CARBON;4700HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;8200HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R075	2001-001055	R-CARBON(S);1.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001074	R-CARBON(S);1300HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001086	R-CARBON(S);18KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R075	2001-001192	R-CARBON(S);8200HM,5%,1/2W,AA,TP,2.4X6.4	
⚠ 4 RX801S	2002-001011	R-COMPOSITION;3.3Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001012	R-COMPOSITION;8.2Mohm,5%,1/2W,AA,TP,3.7x	
....4 R823	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R803	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R802	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 RD106	2003-001031	R-METAL OXIDE(S);2.4ohm,5%,2W,AF,TP,3.9x	
....4 R809	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R804	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R801	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R436	2003-002151	R-METAL OXIDE;18KOHM,5%,2W,AG,TP,6X16MM	
....4 R306	2003-002157	R-METAL OXIDE;2200HM,5%,2W,AG,TP,6X16MM	
....4 R426	2003-002178	R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9x1	
....4 R315	2004-001126	R-METAL;6.2Kohm,1%,1/8W,AA,TP,1.8x3.2m	
....4 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
....4 R024	2004-001403	R-METAL(S);7.5Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001983	R-METAL(S);2.49Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001986	R-METAL(S);35.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R304	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R305	2008-001020	R-FUSIBLE(S);6.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R405	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
....4 R435	2008-001031	R-FUSIBLE(S);1.8ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000374	C-CERAMIC,DISC;0.22NF,5%,50V,C0G,TP,10.5	
....4 C598	2201-000472	C-CERAMIC,DISC;0.33NF,5%,50V,SL,TP,8.5X3	
....4 C598	2201-000472	C-CERAMIC,DISC;0.33NF,5%,50V,SL,TP,8.5X3	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
....4 C598	2201-000639	C-CERAMIC,DISC;0.68NF,10%,2KV,Y5P,TP,9X5	
....4 C598	2201-002022	C-CERAMIC,DISC;0.005NF,0.25PF,500V,C0G,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
....4 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
....4 C689	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,	
....4 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
....4 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
....4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
....4 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000232	C-FILM,LEAD-PEF;3.3nF,5%,50V,TP,8.1x4.5x	
....4 C2560	2301-000261	C-FILM,LEAD-PEF;4.7nF,5%,100V,TP,10.5x12	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C2560	2301-000342	C-FILM,LEAD-PEF;2.2nF,5%,50V,TP,7.4x3.9x	
....4 C807	2301-001397	C-FILM,LEAD-PPF;2.2nF,5%,1.2kV,TP,15x8.5	
....4 C2560	2305-000149	C-FILM,LEAD-PEF;100nF,5%,100V,TP,12x12.5	
....4 C2560	2305-000178	C-FILM,LEAD-PEF;10nF,5%,100V,TP,-,5mm	
....4 C2560	2305-000285	C-FILM,LEAD-PEF;220NF,5%,100V,TP,10.5X5.	
....4 C2560	2305-000382	C-FILM,LEAD-PEF;4.7nF,5%,400V,TP,-,5mm	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 C2560	2305-000665	C-FILM,LEAD-PEF;100nF,5%,63V,TP,7.5x4.0x	
....4 CD312	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 C701	2401-000293	C-AL;100uF,+30-10%,200V,GP,TP,16x25	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000689	C-AL;2200uF,20%,16V,GP,TP,13x25,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-000927	C-AL;22uF,20%,250V,GP,TP,13x20,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001232	C-AL;4.7uF,20%,250V,GP,TP,10x12.5,5	
....4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002267	C-AL;2.2uF,20%,250V,GP,TP,8x11.5,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-003034	C-AL;220uF,20%,16V,WT,TP,8x11.5,5	
....4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4 C701	2401-003058	C-AL;100uF,20%,200V,WT,TP,16x25,7.5	
....4 LD501	2701-000112	INDUCTOR-AXIAL;100uH,10%,3070	
....4 L308	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 L309	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 LD601	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 L805	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
....4 BD501	2701-000141	INDUCTOR-AXIAL;1000uH,5%,3070	
....4 LD301	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2534	
....4 LD302	2701-000238	INDUCTOR-AXIAL;1.8uH,10%,2534	
....4 L808	2701-001007	INDUCTOR-AXIAL;24uH,10%,45140	
....4 L303	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
....4 LD101	2701-001032	INDUCTOR-AXIAL;100uH,10%,4514	
....4 XTD601	2801-004301	CRYSTAL-UNIT;7.372800MHz,30ppm,28-AAA,20	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
⚠ 4 FA801S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FA802S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
⚠ 4 FA803S	3601-001199	FUSE-AXIAL LEAD;125V,3A,SLOW-BLOW,EPOXY,	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
....4 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY33	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY51	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY39	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY40	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY41	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY42	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY61	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY62	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY63	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 GT08	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT09	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT10	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT11	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT12	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 GT05	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT06	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT07	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT604	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT605	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
....4 C420	2301-001258	C-FILM,LEAD-PPF;39nF,5%,400V,TP,19.5x9x1	
....4 R024	2004-004089	R-METAL(S);123Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	AA97-14371A	ASSY SMD-POWER;17 HARRY POTTER,C18A	S.N.A
.....5 IC104	0801-000442	IC-CMOS LOGIC;74HCU04,INVERTER,SOP,14P,1	
.....5 DU410	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,100V/m	
.....5 T0074	1201-001419	IC-VIDEO AMP;7660,SSOP,16P,173MIL,TRIPLE	
.....5 M0018	AA97-14662A	ASSY MICOM;C18A,UPD78F0034AGC,P_HPTPEUD_	
.....6 T0119	AA09-00104A	IC MICOM;UPD78F0034AGC-OTP,UPD78F0034AGC	
⚠ 4 VP801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
⚠ 4 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
....4 FT401	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,0.36	
....4 FT402	AA37-00001A	CONNECTOR-FBT FIX PIN;JM-3500,CPTTV,0.36	
....4 R024	2004-001384	R-METAL(S);150Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R424	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R425	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 CN906	3711-002644	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002647	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 CN906	3711-002646	CONNECTOR-HEADER;BOX,7P,1R,2.5mm,STRAIGH	
....4 R075	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R075	2001-003019	R-CARBON(S);0.39OHM,10%,1/2W,AA,TP,2.4X6	
....4 0	AA41-00953B	PCB SUB;UW17J11,FR-1,1.00,1.6,C18A,1,PO/	S.N.A
....4 C701	2401-001496	C-AL;47uF,20%,16V,GP,TP,5x7,5	
....4 C701	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
....4 C701	2401-000404	C-AL;10uF,20%,16V,BP,TP,5x11,5	
...3 Q805	BP96-00270B	ASSY HEAT SINK P;BP62-00028A,SPRING,KSC2	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0090	0502-001007	TR-POWER;KSC2073-H2,NPN,25W,TO-220,ST,6	
....4 M0144	BH61-00004A	SPRING ETC-TR;CDA,CDB,SUS304,-,-,-,-,-,T	S.N.A
....4 CIS	BP62-00028A	HEAT SINK-PS;AN19IS,A1050S,T1.0,20,25,H7	S.N.A
⚠ ...3 CR405S	2306-000166	C-FILM,LEAD-PPF;220NF,5%,400V,BK,26X17X9	
...3 M2893	AA39-00367A	LEAD CONNECTOR;UW17J11,UL1007#26,UL/CSA,	
⚠ ...3 CR401S	2306-000329	C-FILM,LEAD-PPF;7NF,3%,1.6KV,BK,28.5X18.	
...3	AA96-01565A	ASSY MISC P-DVD LOADER;DSL-810,DVS KORE	S.N.A
...3 T0616	AA26-00199A	TRANS FBT;FQH29A001A,KS1C,3.4MH,FERRITE,	
...3 IC601	AA96-50397A	ASSY H/S;-,-,AA62-30180J,TDA7266S,-	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0124	1201-001308	IC-POWER AMP;7266,ZIP,15P,-,DUAL,26dB,PL	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	AA62-30180J	HEAT SINK-ES;-,A6063 EXTR,-,WHT,-,-,-,40	S.N.A
⚠ ...3 FP801S	3601-000281	FUSE-CARTRIDGE;250V,4A,TIME-LAG,GLASS,5.	
...3	AA65-30104C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V,	S.N.A
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2	S.N.A
..2 T0569	AA94-13271A	ASSY PCB MISC-MASTER;UW21J10VDX/XEC,C18A	
...3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3 CCM1	6001-000057	SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRC1	S.N.A
...3 T0523	AA61-10320A	BRACKET-MASTER;T3350,SECC,T1.0,-,-,-,-	S.N.A
...3	AA97-05250A	ASSY AUTO-MASTER;DW21G5,C16A,PAL	S.N.A
....4 EY801	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY802	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY803	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY804	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 GT01A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT03A	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT803	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 PCB	AA41-00355A	PCB-MASTER;DW21G5,FR-1,1L,A,1.6T,245x245	S.N.A
...3 T0245	AA39-20179C	LEAD CONNECTOR-ASSY;,3(2)P,600MM,YFH800-	
⚠ ...3 SW811S	3403-000179	SWITCH-PUSH;250V,5A,DPST,-,JPW-2104B	

Loc. No.	Code No.	Description ; Specification	Remark
..2 T0091	AA94-13276A	ASSY PCB MISC-A/V SIDE;UW17J11,C18A	
...3	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 JAC702	3722-000143	JACK-PHONE;1P(VER),3.4PI,AG,BLK,NO	
...3 JAC701	3722-001031	JACK-PIN;3P,3.6mm,#18,AU	
...3 T0245	AA39-20499B	LEAD CONNECTOR-ASSY;,4P,200,YBNH025-04,S	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	AA97-14461A	ASSY AUTO-A/V SIDE;UW17J11,C18A	S.N.A
....4 R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R075	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
....4 C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 LM55	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 LM54	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 LM51	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 LM50	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
....4 PCB	AA41-00893A	PCB SUB;V18C,FR-1,1.00,1.6,245*245,V18C,	S.N.A
...3 T0245	AA39-20069D	LEAD CONNECTOR-ASSY;,5P,300,YBNH025-05,6	
..2 T0157	AA94-13456A	ASSY PCB MISC-M/DECK;UW17J11VD5XXEC,C18A	
...3 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3 T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
...3 T0081	6003-001022	SCREW-TAPTITE;RH,+,B,M3,L12,ZPC(BLK),SWR	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	AA61-01339A	HOLDER-TRAY;ABS HB,28J10,BLK	S.N.A
...3 T0070	AA61-01349A	HOLDER-CHASSIS;17J11(SEH),HIPS V0,G4309	S.N.A
...3	AA61-01350A	HOLDER-DECK;17J11(SEH),HIPS V0,G4309	S.N.A
...3	AA63-00696A	SHIELD-BOTTOM;28J10,SPTE,T0.3,C18A	S.N.A
...3	AA63-00700A	SHIELD-DVD;17J11,SECC T0.5	S.N.A
...3	AA63-00701A	SHIELD-DECK;17J11,SECC T0.5	S.N.A
...3 T0724	AA94-12892A	ASSY PCB MISC-MODULE MSP;HARRY POTTER,C1	
....4 CN906	3711-003495	CONNECTOR-HEADER;NOWALL,34P,2R,2.54MM,AN	
....4	AA97-14021A	ASSY AUTO;PAL	S.N.A
.....5 T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 L603	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....5 L602	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....5 L601	2702-001100	INDUCTOR-RADIAL;3.9uH,10%,4.0x6.0mm	
.....5 XT601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
.....5	AA97-13951A	ASSY SMD;PAL	S.N.A
.....6 D601	0401-000133	DIODE-SWITCHING;RLS4148,75V,150MA,LL-34,	
.....6 DZ016	0403-001064	DIODE-ZENER;RLZ5.1B,4.94-5.2V,500MW,LL-3	
.....6 IC601	1204-001925	IC-SOUND PROCESSOR;MSP3411G-B8,FLQFP,64P	
.....6 R616	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R617	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R621	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R622	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R623	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R615	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R612	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R613	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R614	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R610	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R611	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R618	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R619	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R625	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R609	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R604	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R606	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R607	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R608	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R620	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6 T0657	2203-000181	C-CER,CHIP;100nF,+80-20%,25V,Y5V,TP,2012	
.....6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 T0657	2203-000444	C-CER,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
.....6 T0657	2203-000701	C-CER,CHIP;0.002NF,0.25PF,50V,C0G,TP,201	
.....6 T0657	2203-000938	C-CER,CHIP;0.47NF,5%,50V,C0G,TP,2012	
.....6 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....6 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....6 T0657	2203-001077	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,2012	
.....6 0	AA41-00929A	PCB SUB-MSP;C18A,FR-4,2,VER.00,1.6,245X1	S.N.A
.....6 T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	
.....6 T0156	0501-000312	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	
.....6 R626	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6 R627	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6 R628	2007-001024	R-CHIP;560Kohm,5%,1/8W,TP,2012	
.....6 R629	2007-001024	R-CHIP;560Kohm,5%,1/8W,TP,2012	
.....6 T0657	2203-000323	C-CER,CHIP;12nF,10%,50V,X7R,TP,2012,-	
.....6 T0657	2203-000323	C-CER,CHIP;12nF,10%,50V,X7R,TP,2012,-	
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,S	S.N.A
.....5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
....4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3 T0256	AA94-13268A	ASSY PCB MISC-COMB OPTION;UW21J10,C18A	
....4 CN906	3711-003543	CONNECTOR-HEADER;NOWALL,16P,1R,2.5MM,ANG	
....4 PIN01	AA61-10068A	BRACKET-PCB;M2160,SPTE,T0.3,-,-,-,-	S.N.A
....4	AA97-14426S	ASSY AUTO-COMB;UW17J11VD5X,C18A	S.N.A
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 0	AA41-00952A	PCB;C18A,FR-1,1,A,1.6,245*245,C18A,36,W-	S.N.A
....4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
...3 T0073	AA94-13539A	ASSY PCB MAIN;UW17J11VD5XXEC,C18A	
....4	0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A
....4 PTM902	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
....4 PTM901	0604-001122	PHOTO-INTERRUPTER;TR,0.065%,150mW,DIP-4,	
....4 IC903	0904-001121	IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30	
....4 IC106	1001-001114	IC-VIDEO SWITCH;TEA6425,VIDEO SWITCH ,DI	
....4 IC112	1103-001177	IC-EEPROM;24WC16,2048x8Bit,DIP,8P,-,-,2.	
....4 JK702	3707-001005	CONNECTOR-OPTICAL;PLUG,SM,-,4.4/2.0MM	
....4 CNM03	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	
....4 CNM01	3708-000394	CONNECTOR-FPC/FFC/PIC;6P,1.25MM,STRAIGHT	
....4 CNM02	3710-001648	CONNECTOR-SOCKET;2P,1R,2.5mm,STRAIGHT,SN	
....4 CN906	3711-000654	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN906	3711-001084	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIG	S.N.A
....4 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
....4 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CN906	3711-004833	CONNECTOR-HEADER;BOX,12P,2R,2MM,STRAIGHT	
....4 JK703	3722-000536	JACK-PIN;1P,3.3mm,AG,YEL,N	
....4 C0104	3809-001206	CABLE-FLAT;30V,-20to+80C,140mm,6P,1.25mm	
....4 SWM901	AA34-20001A	SWITCH-MODE;1,25x14.6x29.8mm,BK,DC5V	
....4 SWM902	AA34-40001A	SWITCH-REC.;1EA,37.5x14.4mm,BK,DC5V	
....4 M2893	AA39-00120J	LEAD CONNECTOR;V54A/SMV-25X5N,UL1007#26,	
....4 T0245	AA39-00180C	LEAD CONNECTOR-ASSY;TF20P1,UL1007#26,UL/	
....4 T0245	AA39-00180D	LEAD CONNECTOR-ASSY;V18A,UL1007#26,UL/CS	
....4 TU01S	AA40-00050A	TUNER;TCLW3101PD18A(S),TCLW3101PD18A(S),	
....4 GPM01	AA63-00694A	GROUND-PLATE;28J10,SPTE,T0.5	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
....4	LDM902	AA91-60318A	ASSY HOLDER-LED;BLK,IR LED,HB,ABS,TS-DEC	
.....5	Q013	0601-001303	LED-IR;SIDE-VIEW,2.5mm,75mW,6V,950nm,	
.....5		AA61-00003A	HOLDER-LED;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
....4	SM901	AA91-60319A	ASSY HOLDER-SENSOR;BLK,TR LED,HB,ABS,TS-	
.....5	P016	0603-001011	PHOTO TR;NPN,35V,6V,50mA,75mW,BK	
.....5	T0559	AA61-00005A	HOLDER-SENSOR;TVN-502V,ABS,-,-,-,BLK,HB	S.N.A
....4	LDM901	AA96-00462A	ASSY LED GUIDE;-,-,DL-11S2R1,RED	S.N.A
....4		AA97-14401A	ASSY AUTO;UW17J11VD5XXEU,C18A	S.N.A
.....5	DM804	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	DM805	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	DM901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	RM923	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	DM803	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	D102	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	D201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	D901	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	DM201	0401-000005	DIODE-SWITCHING;1N4148,75V,150MA,DO-35,T	
.....5	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5	T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.45-5.73V,500MW,DO	
.....5	DZ016	0403-000717	DIODE-ZENER;MTZJ5.1B,4.94-5.2V,500MW,DO-	
.....5	DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5	DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5	DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57-9.01V,500MW,DO	
.....5	DZ016	0403-001211	DIODE-ZENER;MTZJ12B,11.8-12.3V,500MW,DO-	
.....5	DZ016	0403-001317	DIODE-ZENER;MTZJ3.0B,3.01-3.22V,500MW,DO	
.....5	DZ016	0403-001373	DIODE-ZENER;MTZJ5.1A,4.85-5.03V,500MW,DO	
.....5	T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5	T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5	T0156	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5	T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5	T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5	T0156	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T	
.....5	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5	T0156	0501-000362	TR-SMALL SIGNAL;KSA2328A-Y,NPN,1W,TO-92L	
.....5	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5	T0156	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T	
.....5	T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5	T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5	T0156	0501-000442	TR-SMALL SIGNAL;KTC3203-Y,NPN,400mW,T0-9	
.....5	QM903	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5	QM902	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5	QM901	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5	QM803	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-	
.....5	QM904	0504-000119	TR-DIGITAL;KSR1004,NPN,300MW,47K/47K,TO-	
.....5	QM802	0504-000142	TR-DIGITAL;KSR2001,PNP,300MW,4.7K/4.7K,T	
.....5	ICM903	1203-002000	IC-VOL. DETECTOR;7027,TO-92,3P,-,PLASTIC	
.....5	R125	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5	R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R075	2001-000118	R-CARBON(S);180OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5	R125	2001-000210	R-CARBON;0ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1 8X3.2MM	
.....5	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000405	R-CARBON;180OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000534	R-CARBON;240OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001035	R-CARBON;91OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R075	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
.....5 R107	2003-000493	R-METAL OXIDE(S);12ohm,5%,2W,AF,TP,4x12m	
.....5 RM975	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
.....5 RM974	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP,3.9x	
.....5 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000127	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,25V,Y5V	
.....5 C689	2202-000145	C-CERAMIC,MLC-AXIAL;0.12NF,10%,50V,Y5P,T	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000183	C-CERAMIC,MLC-AXIAL;2.2NF,20%,16V,Y5R,TP	
.....5 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
.....5 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
.....5 C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
.....5 C689	2202-000231	C-CERAMIC,MLC-AXIAL;0.33NF,10%,50V,Y5P,T	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000253	C-CERAMIC,MLC-AXIAL;4.7nF,20%,16V,Y5R,TP	
.....5 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
.....5 C689	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP	
.....5 C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000279	C-CERAMIC,MLC-AXIAL;47pF,5%,50V,SL,TP,3.	
.....5 C689	2202-000286	C-CERAMIC,MLC-AXIAL;56pF,5%,50V,SL,TP,1.	
.....5 CM205	2202-000573	C-CERAMIC,MLC-RADIAL;0.82NF,5%,50V,C0G,T	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000632	C-CERAMIC,MLC-AXIAL;100nF,20%,50V,Z5U,TP	
.....5 C689	2202-000720	C-CERAMIC,MLC-AXIAL;8.2nF,20%,16V,Y5R,TP	
.....5 C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
.....5 C689	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP	
.....5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 C689	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,3	
.....5 C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
.....5 C689	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000807	C-CERAMIC,MLC-AXIAL;22nF,+80-20%,25V,Y5V	
.....5 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
.....5 C689	2202-002008	C-CERAMIC,MLC-AXIAL;10nF,+80-20%,50V,Y5V	
.....5 C689	2202-002009	C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5	
.....5 C689	2202-002019	C-CERAMIC,MLC-AXIAL;68NF,10%,50V,X7R,TP,	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V	
.....5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5 C689	2202-002055	C-CERAMIC,MLC-AXIAL;47nF,+80-20%,50V,Y5V	
.....5 C2560	2301-000111	C-FILM,LEAD-PEF;1.8nF,5%,50V,TP,6.5x3.0x	
.....5 C2560	2301-000175	C-FILM,LEAD-PEF;15nF,5%,50V,TP,7.1x3.5x1	
.....5 C2560	2301-000192	C-FILM,LEAD-PEF;1nF,5%,50V,TP,5.3x10mm,5	
.....5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5 C2560	2301-000224	C-FILM,LEAD-PEF;22nF,5%,50V,TP,7.4x3.9x1	
.....5 C2560	2301-000254	C-FILM,LEAD-PEF;39nF,5%,50V,TP,7.5x3.5x6	
.....5 C2560	2301-000301	C-FILM,LEAD-PEF;6.8nF,5%,50V,TP,6.5X5.5X	
.....5 C2560	2301-000314	C-FILM,LEAD-PEF;8.2nF,5%,50V,TP,6.5x3.0x	
.....5 C2560	2301-000356	C-FILM,LEAD-PEF;47nF,5%,50V,TP,7.5x4.0x6	
.....5 C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5 C2560	2301-000383	C-FILM,LEAD-PEF;10nF,5%,50V,TP,6x7x3.2mm	
.....5 C229	2301-001664	C-FILM,LEAD-OTHER;100nF,3%,50V,TP,20x16x	
.....5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000196	C-FILM,LEAD-PEF;150nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000289	C-FILM,LEAD-PEF;220nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000411	C-FILM,LEAD-PEF;470nF,5%,50V,TP,7.3x4.8x	
.....5 C2560	2305-000411	C-FILM,LEAD-PEF;470nF,5%,50V,TP,7.3x4.8x	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C2560	2305-000412	C-FILM,LEAD-PEF;470nF,5%,63V,TP,-,5mm	
.....5 C914	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
.....5 CM217	2306-000122	C-FILM,LEAD-PPF;100nF,5%,50V,TP,7.3x4.0x	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000426	C-AL;10uF,20%,16V,GP,TP,3.5x5,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000913	C-AL;22uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-000922	C-AL;22uF,20%,16V,GP,TP,5x5,5	
.....5 C701	2401-001250	C-AL;4.7uF,20%,35V,GP,TP,4x5,5	
.....5 C701	2401-001363	C-AL;470uF,20%,16V,GP,TP,10x12.5,5	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-001537	C-AL;47uF,20%,25V,GP,TP,6.3x7mm,5mm	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
.....5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002069	C-AL;33uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002095	C-AL;47uF,20%,25V,GP,TP,6.3x5,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002291	C-AL;47uF,20%,16V,GP,TP,6.3x5,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
.....5 C701	2401-002299	C-AL;4.7uF,20%,50V,GP,TP,5x7,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....5 C701	2401-003036	C-AL;100uF,20%,16V,GP,TP,5X11mm,5mm	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 C701	2401-003102	C-AL;100uF,20%,10V,GP,TP,5x11,5	
.....5 LM802	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM901	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5 LM903	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	

Loc. No.		Code No.	Description ; Specification	Remark
.....5	LM208	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5	LM205	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5	LM204	2701-000002	INDUCTOR-AXIAL;100uH,10%,4298	
.....5	LM202	2701-000111	INDUCTOR-AXIAL;100uH,10%,2534	
.....5	L710	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L709	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L708	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L707	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L711	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L901	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L902	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L904	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L905	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L201	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L202	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L203	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L701	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L702	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L706	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L705	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L704	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	L703	2701-000114	INDUCTOR-AXIAL;10uH,10%,2534	
.....5	LM902	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5	LM604	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5	L102	2701-000115	INDUCTOR-AXIAL;10uH,10%,3070	
.....5	XTM201	2801-000277	CRYSTAL-UNIT;4.433619MHz,8ppm,28-AAM,S,1	
.....5	XTM901	2801-003750	CRYSTAL-UNIT;8MHZ,30PPM,28-AAA,22PF,80OH	
.....5	F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5	F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5	L2514	3301-000287	BEAD-AXIAL;,3.5x1.0x6.0mm,3000mA,TP,,50	
.....5	SWM9083404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9093404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9103404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9113404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9123404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9033404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9043404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9053404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9063404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	SWM9073404-001252		SWITCH-TACT;12VDC,50MA,130GF,7.5X7.1,1	
.....5	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5	GT001	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5	GT004	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5	R075	2001-003192	R-CARBON(S);0.82OHM,5%,1/2W,AA,TP,2.4X6.	
.....5		AA97-14376A	ASSY SMD;C18A,UW17J11	S.N.A
.....6	IC118	1204-001922	IC-VIDEO PROCESS;LA71750M,QFP,100P,-,PLA	
.....6	M0018	AA97-14388A	ASSY MICOM;,C18A,TDA9394,TC_HPTP06_005,2	
.....7	T0119	AA09-00239A	IC MICOM;TDA9394-OTP,80,3.3V&8V,12MHZ,UO	
.....6	T0119	AA09-00423A	IC MICOM;uPD78F4928,P-HPTPEUV-1000,100P,	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5	LM201	2702-000166	INDUCTOR-RADIAL;47uH,5%,6.0x6.4mm	
.....5	LM203	2702-000120	INDUCTOR-RADIAL;15000uH,5%,6.2x7.4mm	
.....5	0	AA41-00934C	PCB MAIN;UW17J11,FR-1,1,00,1.6,330X245,C	S.N.A
....4	M2893	MD39-00074B	LEAD CONNECTOR;P57A/SVP-55W9HT,UL1007#26	
....4	JK701	3722-000183	JACK-SCART;21P,4mm,SN,BLK,NO	
....4	T0245	AA39-00184A	LEAD CONNECTOR-ASSY;,1P,300MM,YFH800-01,	
....4	T0245	AA39-20016D	LEAD CONNECTOR-ASSY;,3P,500,67096-003,S,	
....4	M2893	BP39-00055A	LEAD CONNECTOR;P57A/SVP-55WHT,UL1007#26,	
....4	XT901	2801-004033	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,30O	
....4	REM901	AA32-00015A	MODULE REMOCON;FRP-3521H31,38KHZ,940MM,M	
...3		AA96-01905A	ASSY MISC P-M DECK;C18A, SVTK-M4P/BON,4	S.N.A
..2	T0098	AA94-13458A	ASSY PCB MISC-CONTROL;HARRY POTTER 17,C	
...3	T0245	AA39-20070D	LEAD CONNECTOR-ASSY;,7P,150,YBNH025-07,6	
...3		AA97-14402A	ASSY AUTO;CTV	S.N.A
....4	SWD702	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4	SWD703	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4	SWD704	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4	SWD701	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4	SWD705	3404-000244	SWITCH-TACT;15V,20mA,90-170gf,7.5x7mm,SP	
....4	M0119	AA41-00955A	PCB CONTROL;UW21J10,FR-1,1,00,1.6,330X24	S.N.A
...3		0202-000187	SOLDER-WIRE FLUX;-,-,D1.2,63SN/37PB RA,-	S.N.A

ASSY P/MATERIAL

Loc. No.		Code No.	Description ; Specification	Remark
1		AA92-08471A	ASSY P/MATERIAL;17J11	S.N.A
..2		6902-000001	BAG AIR;LDPE,T0.2,L1800,W1000,TRP,,,LDPE	S.N.A
..2		6902-000005	BAG PE;HDPE/NITRON/HDPE,T0.015/T0.5/T0.0	S.N.A
..2		6902-000061	BAG AIR;LDPE,T0.2,L1000,W500,TRP,,,	S.N.A
..2	T0214	AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A

ASSY ACCESSORY

Loc. No.		Code No.	Description ; Specification	Remark
1	M0245	AA92-08754A	ASSY ACCESSORY;UW17J11VD5XXEG,C18A	S.N.A
..2	1	6801-001015	CARD-REGISTRATION;XEG,GERMAN,MOJO100,L15	N.A
..2	T0074	AA59-00324A	REMOCON;53,TM52,HARRY PORTER,G6148,PAL,T	
..2	0	BN68-00514A	MANUAL-WARRANTY CARD;PDP/LCD TV,EN,FR,DS.	N.A
..2	1	6801-001016	CARD-REGISTRATION;XEF,FRENCH,MOJO100,L15	S.N.A
..2	1	6801-001018	CARD-REGISTRATION;XET,ITALY,MOJO100,L150	S.N.A
..2	1	6801-001020	CARD-REGISTRATION;XEP,PORTUGAL,MOJO100	S.N.A
..2		6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2	M0596	AA68-03228A	MANUAL USERS-00;UW17J11,UW17J11VD5XXES.	N.A

ASSY FIXING

Loc. No.		Code No.	Description ; Specification	Remark
1		AA91-06346M	ASSY FIXING;CP2,C18A	S.N.A
..2		AA65-30009A	CLAMPER CORE-FBT;-,ABS,V0,-,BLK,-	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
⚠ ..2	T0066	AA96-20130F	ASSY POWER CORD;-,CP2/NO(4.0R),H/C 250mm	S.N.A
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10003B	CBF POWER CORD;-,KJP-140,KLCE-2F,2.4m,HO	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A

5. PCB Diagrams

5-1 MAIN PCB

This Document can not be used without Samsung's authorization.

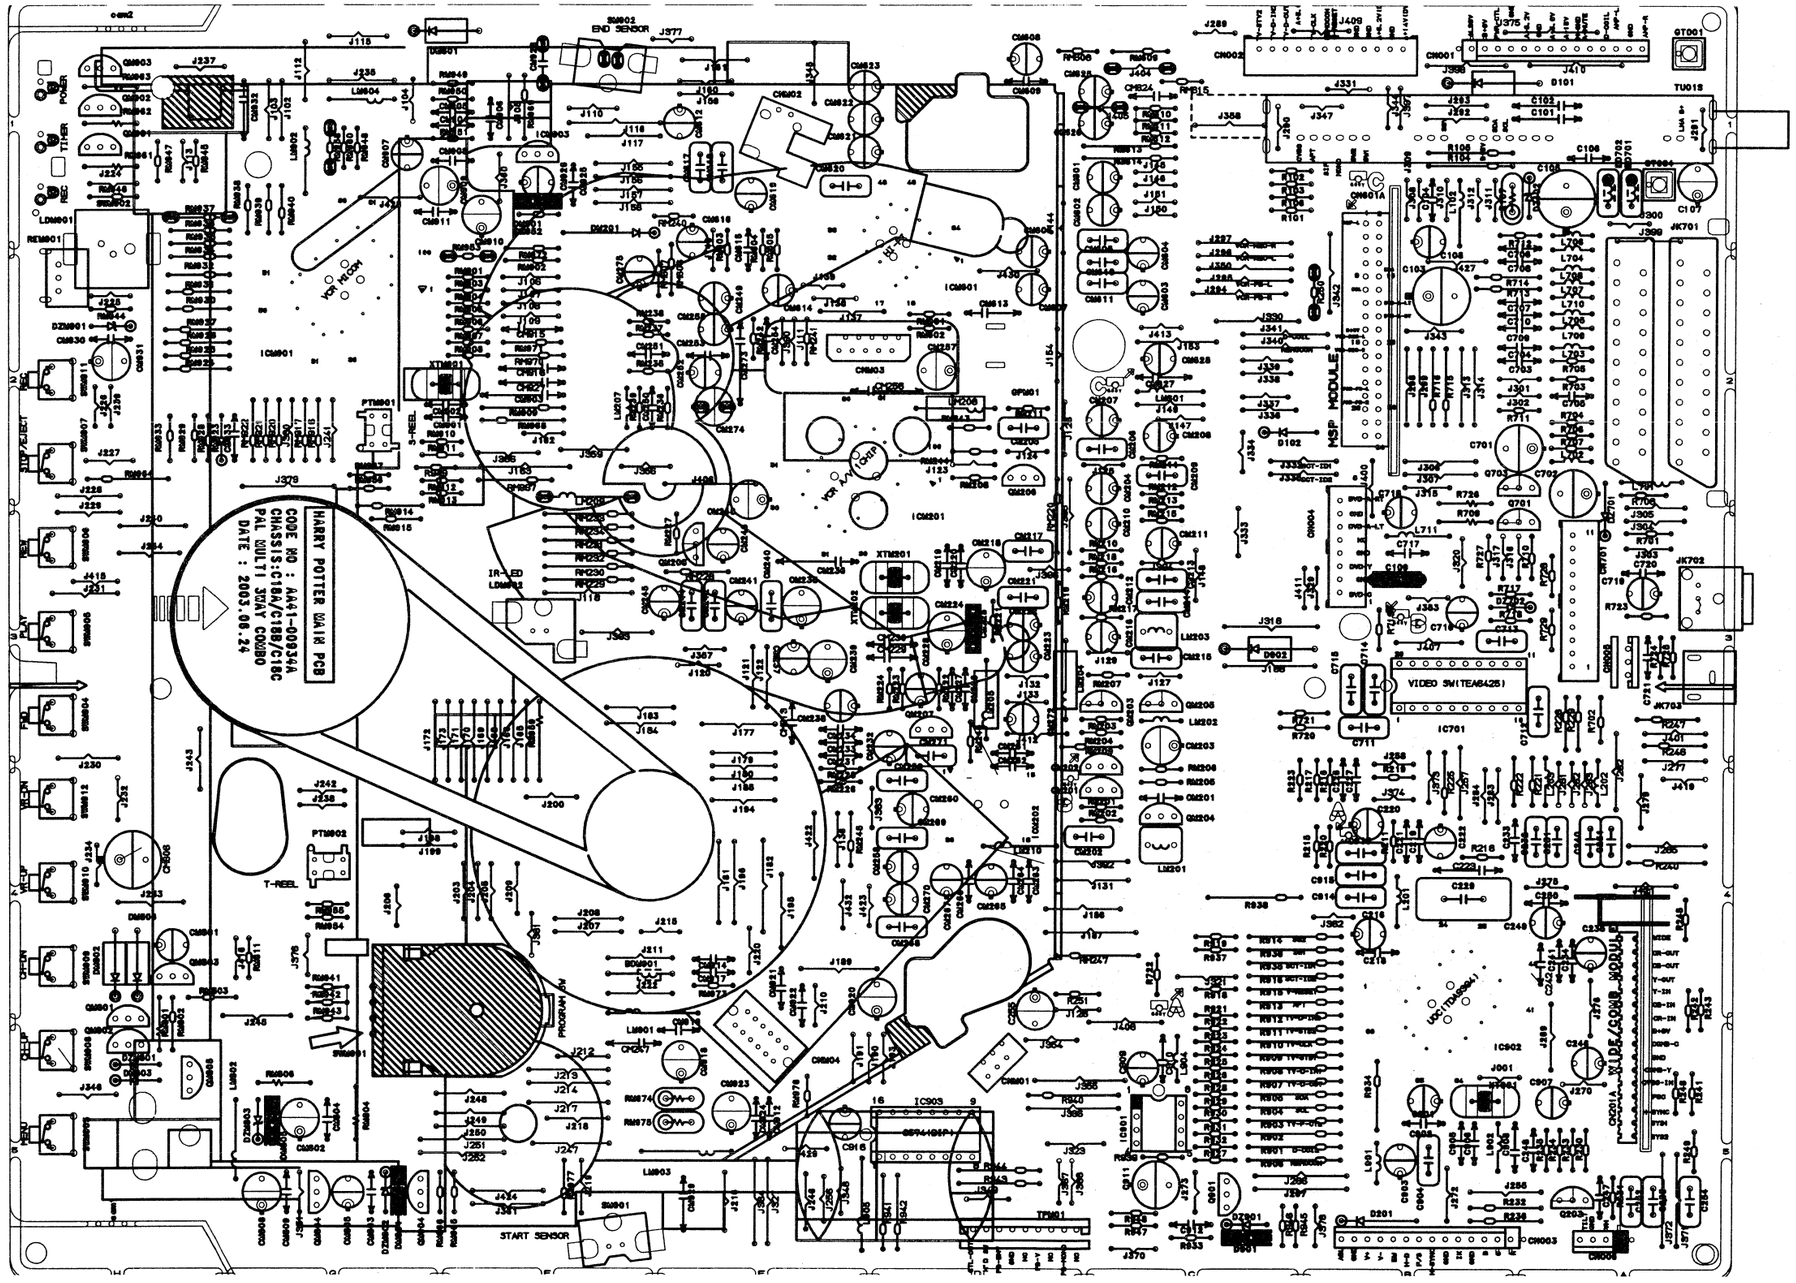

5-2 POWER PCB(28")

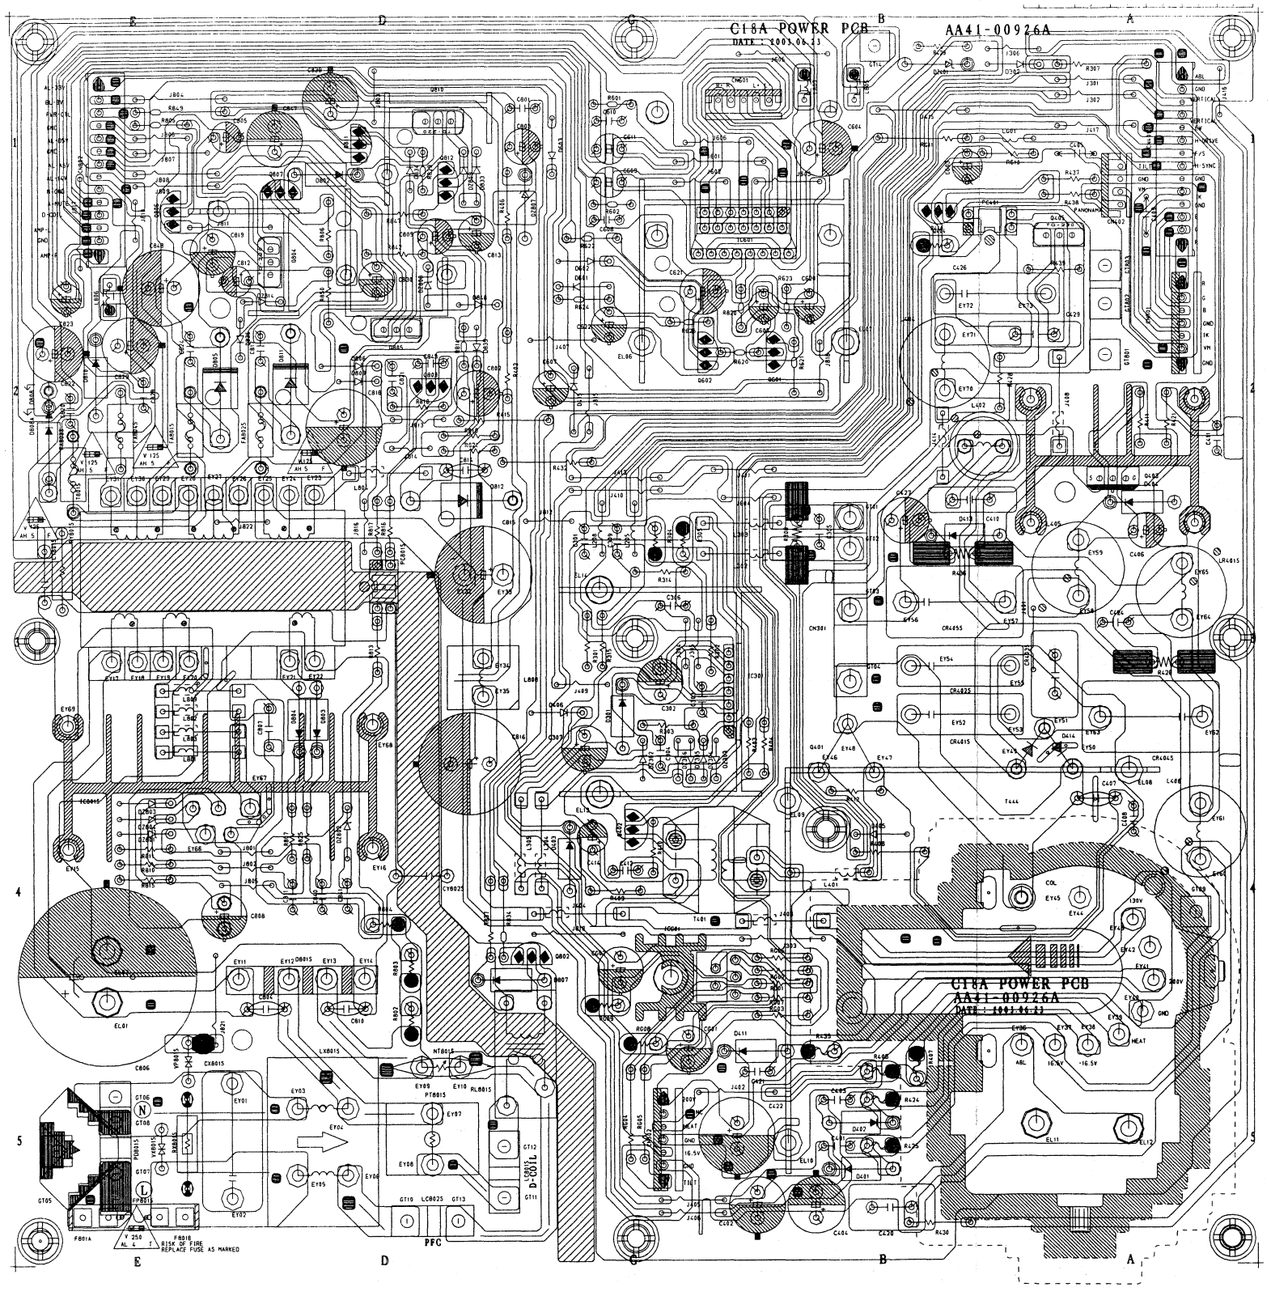

5-3 POWER PCB(21")

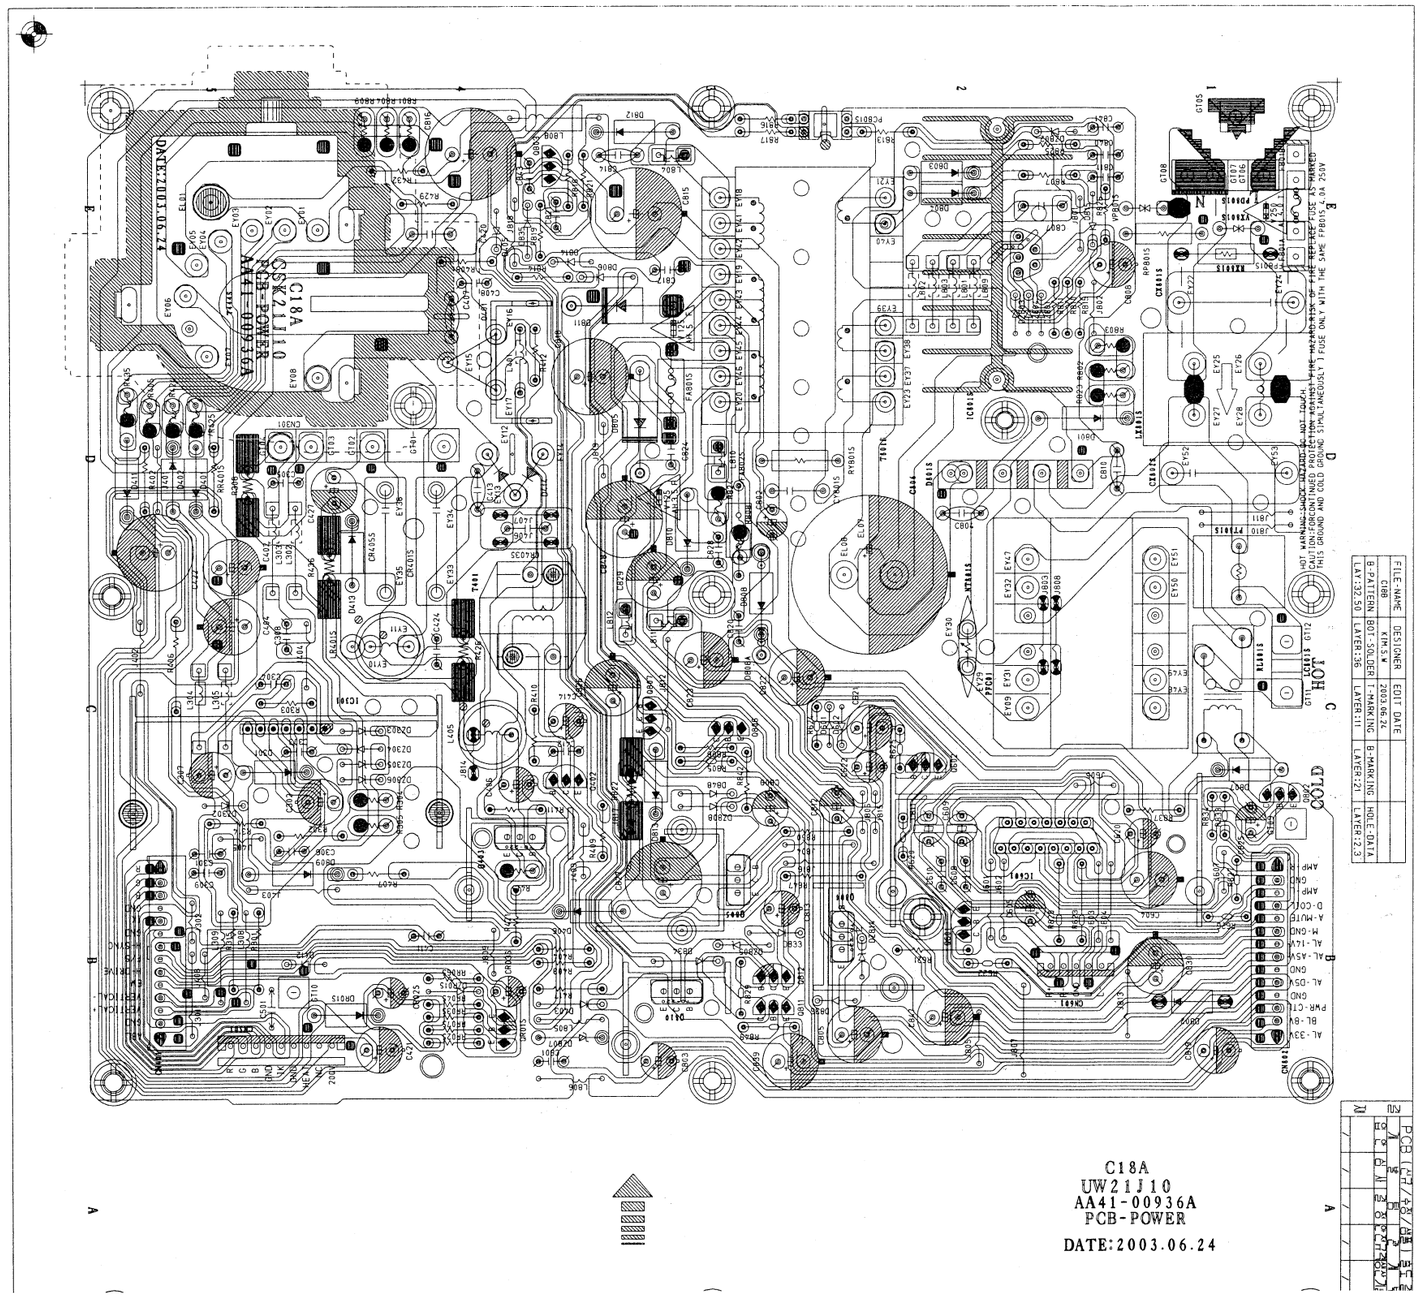

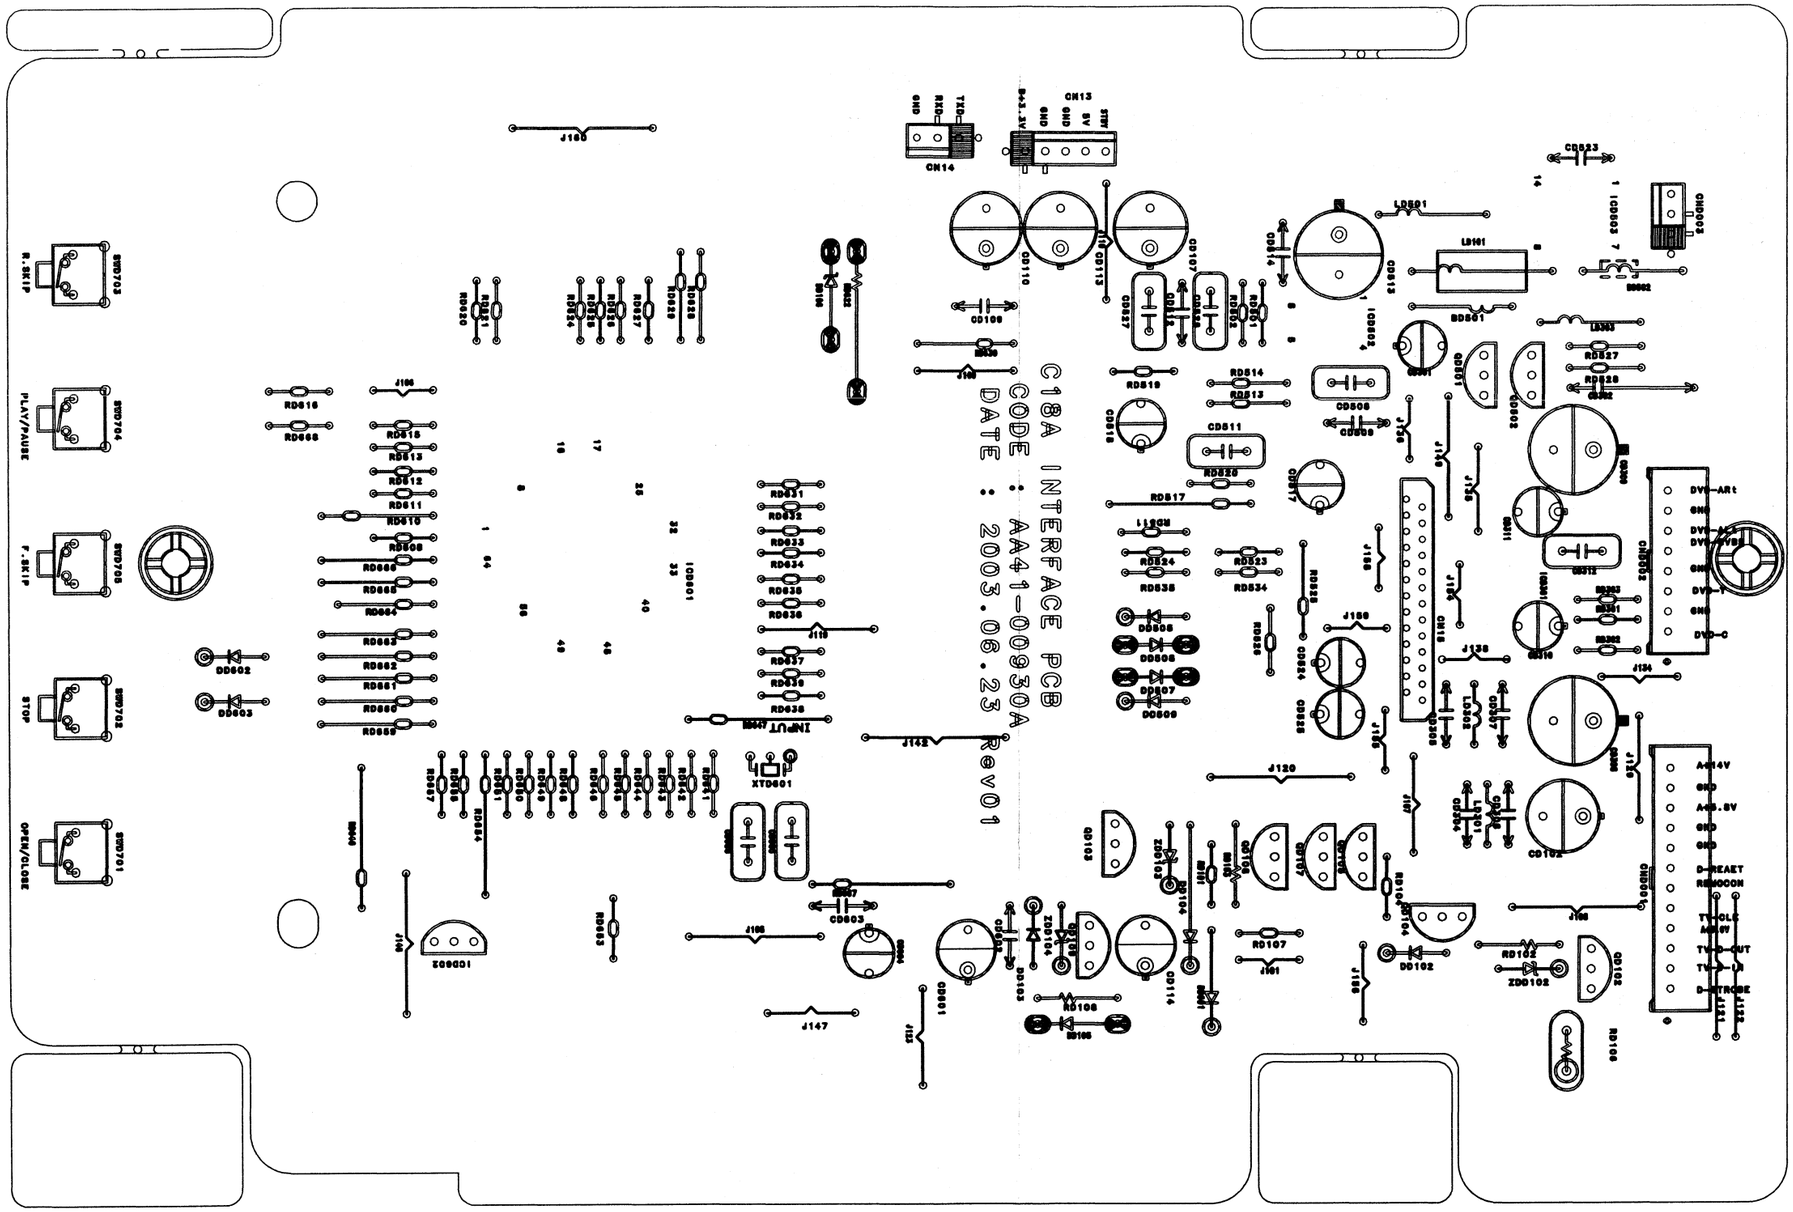
C18A INTERFACE PCB
CODE : AA41-00930A
DATE : 2003.06.23 Rev01
CN13
CN14
J105
J106
J107
J108
J109
J110
J111
J112
J113
J114
J115
J116
J117
J118
J119
J120
J121
J122
J123
J124
J125
J126
J127
J128
J129
J130
J131
J132
J133
J134
J135
J136
J137
J138
J139
J140
J141
J142
J143
J144

5-5 POWER PCB + INTERFACE PCB(17")

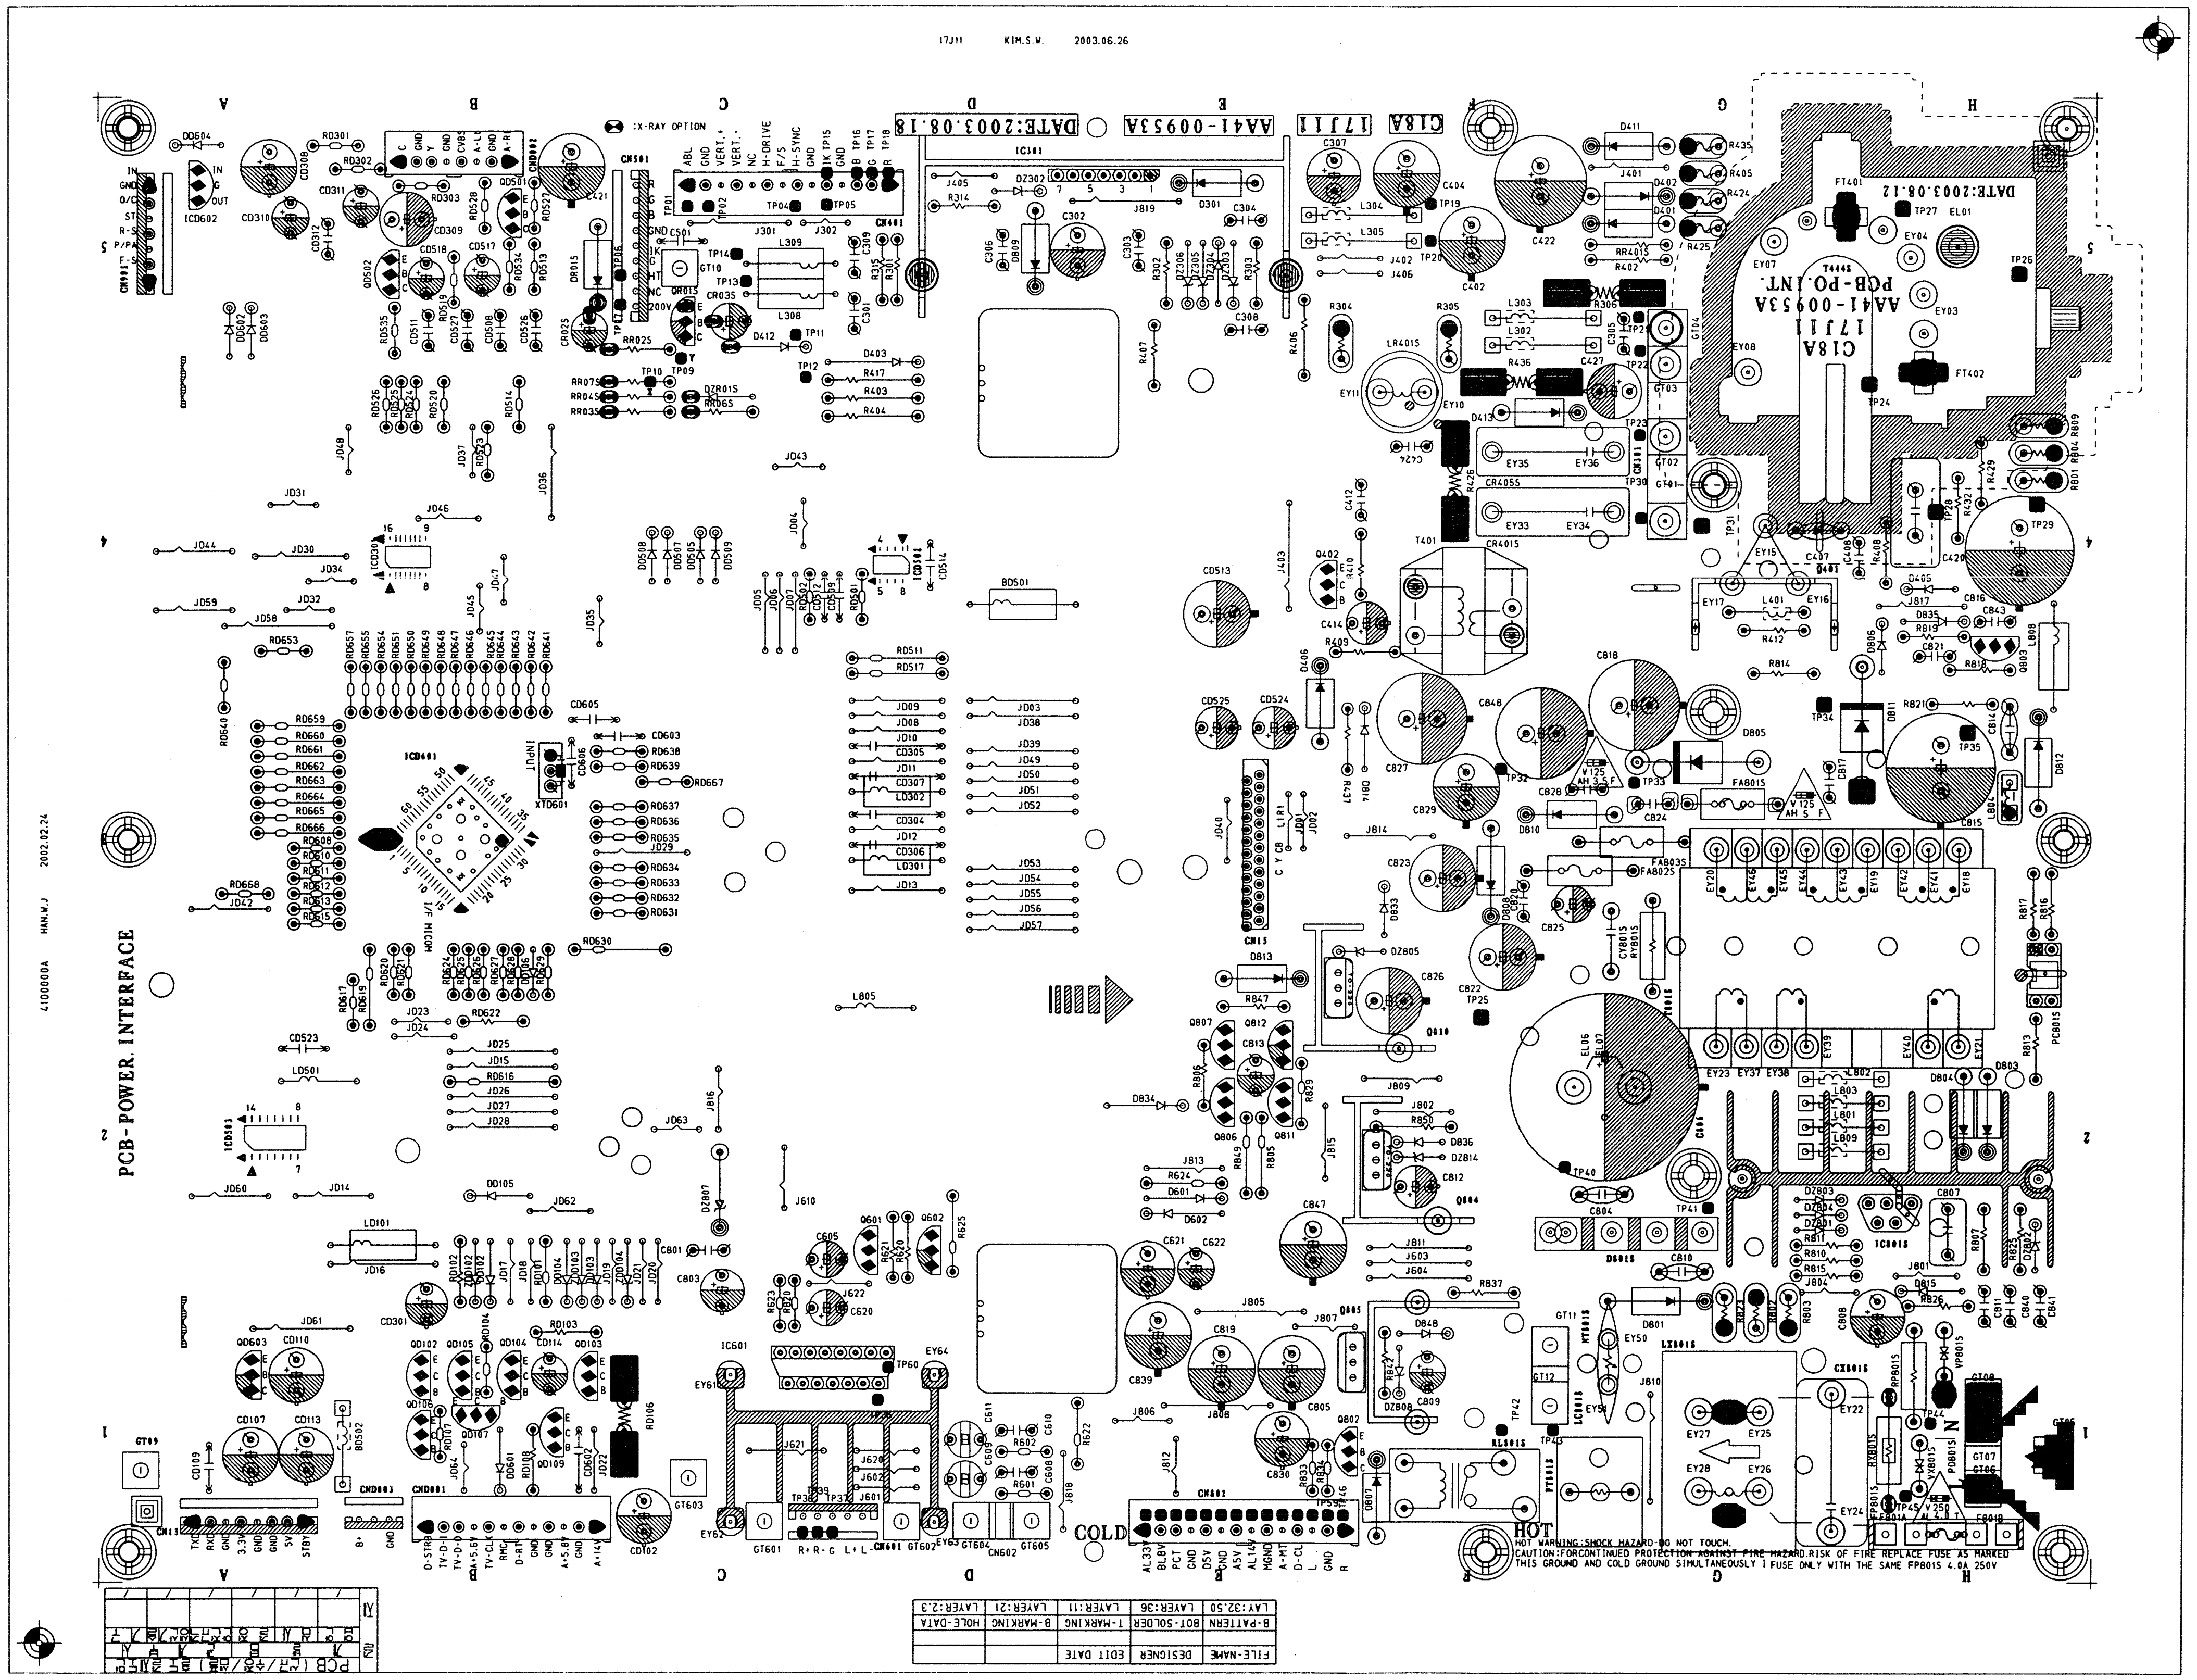

6. Block Diagrams

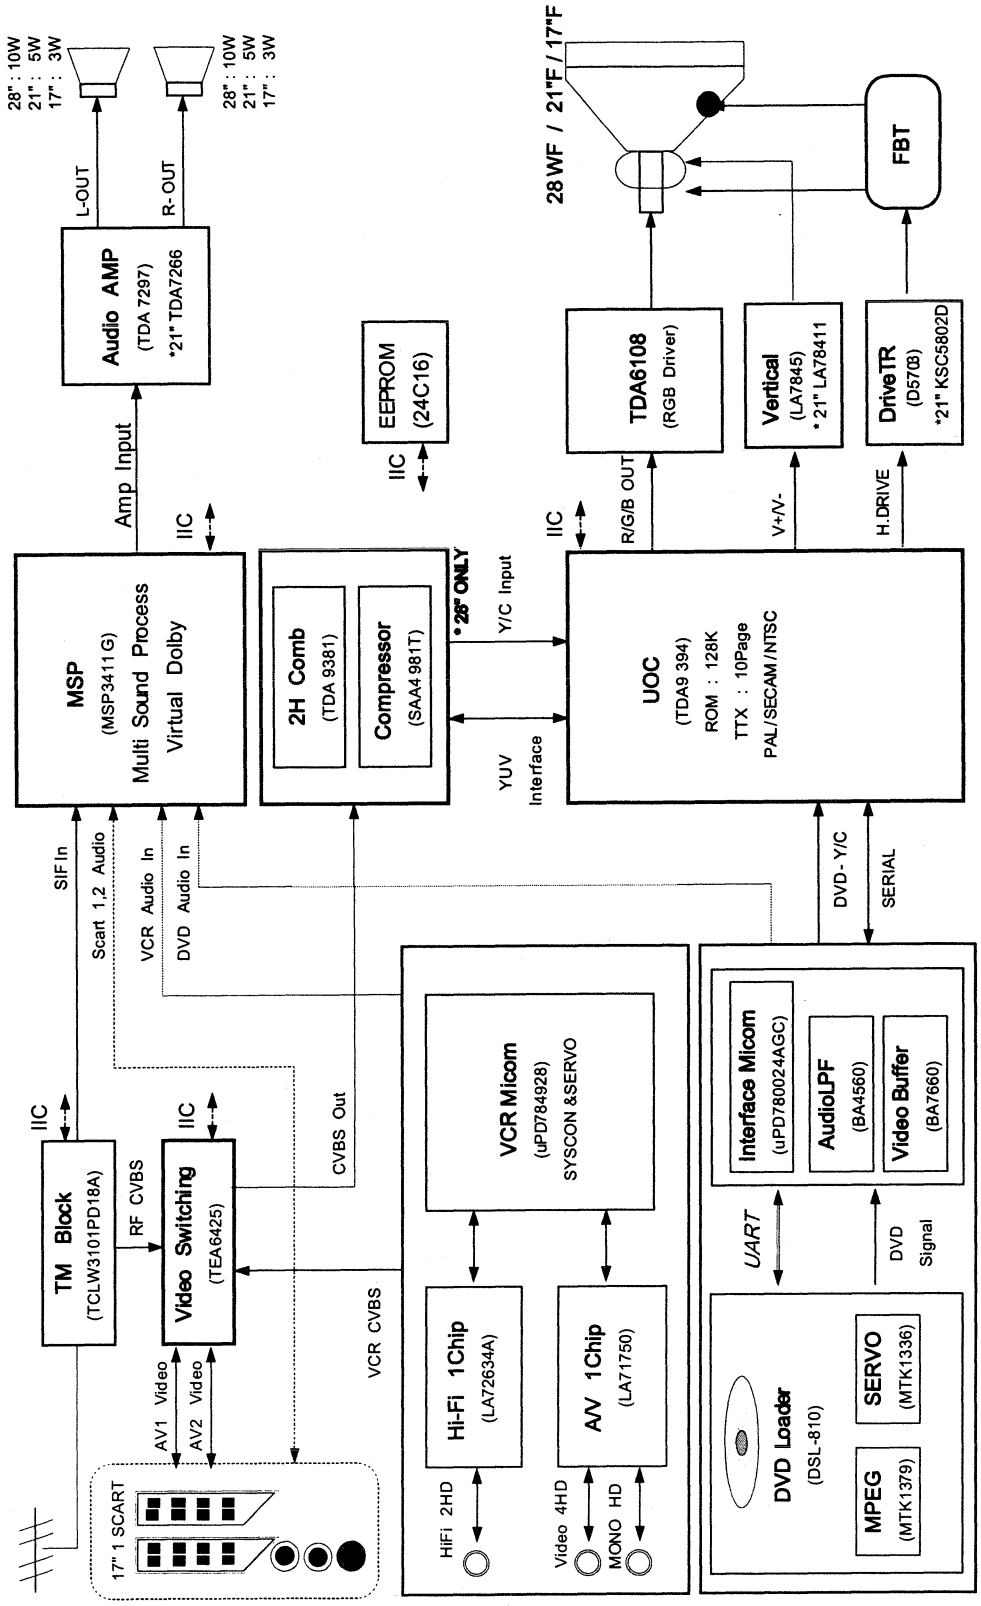

7. Schematic Diagrams

7-1 MAIN 1

This Document can not be used without Samsung's authorization.

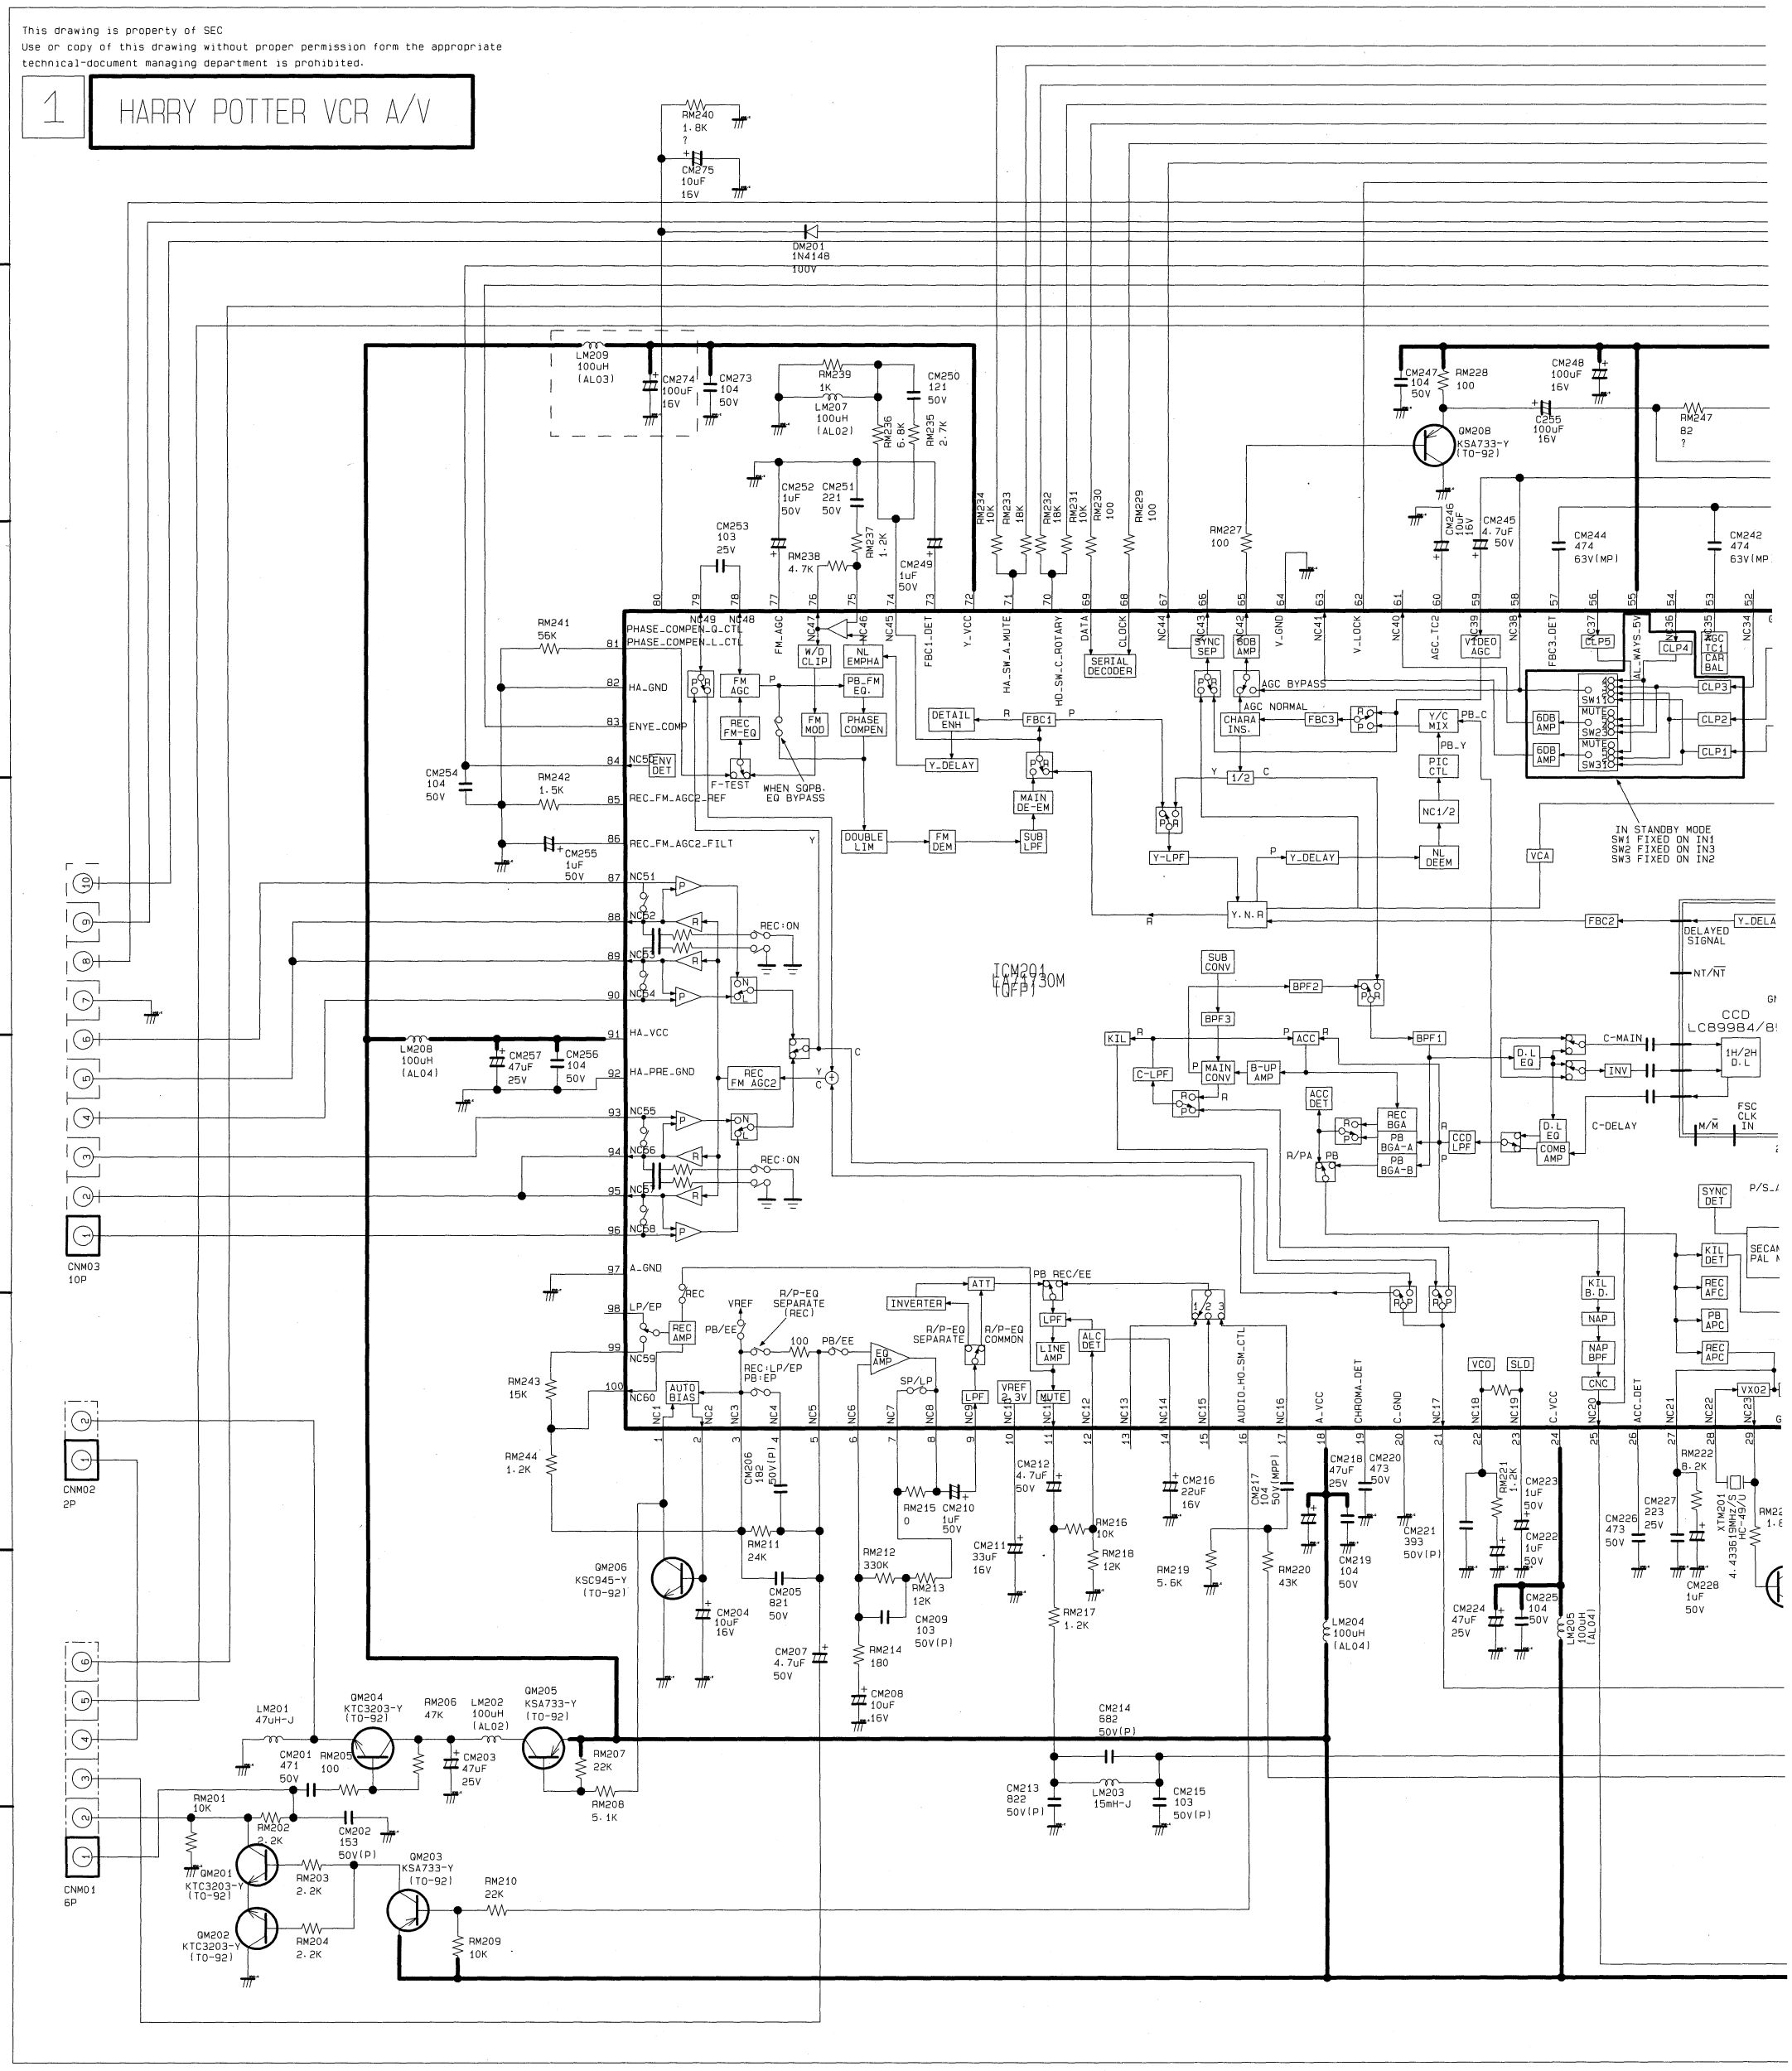

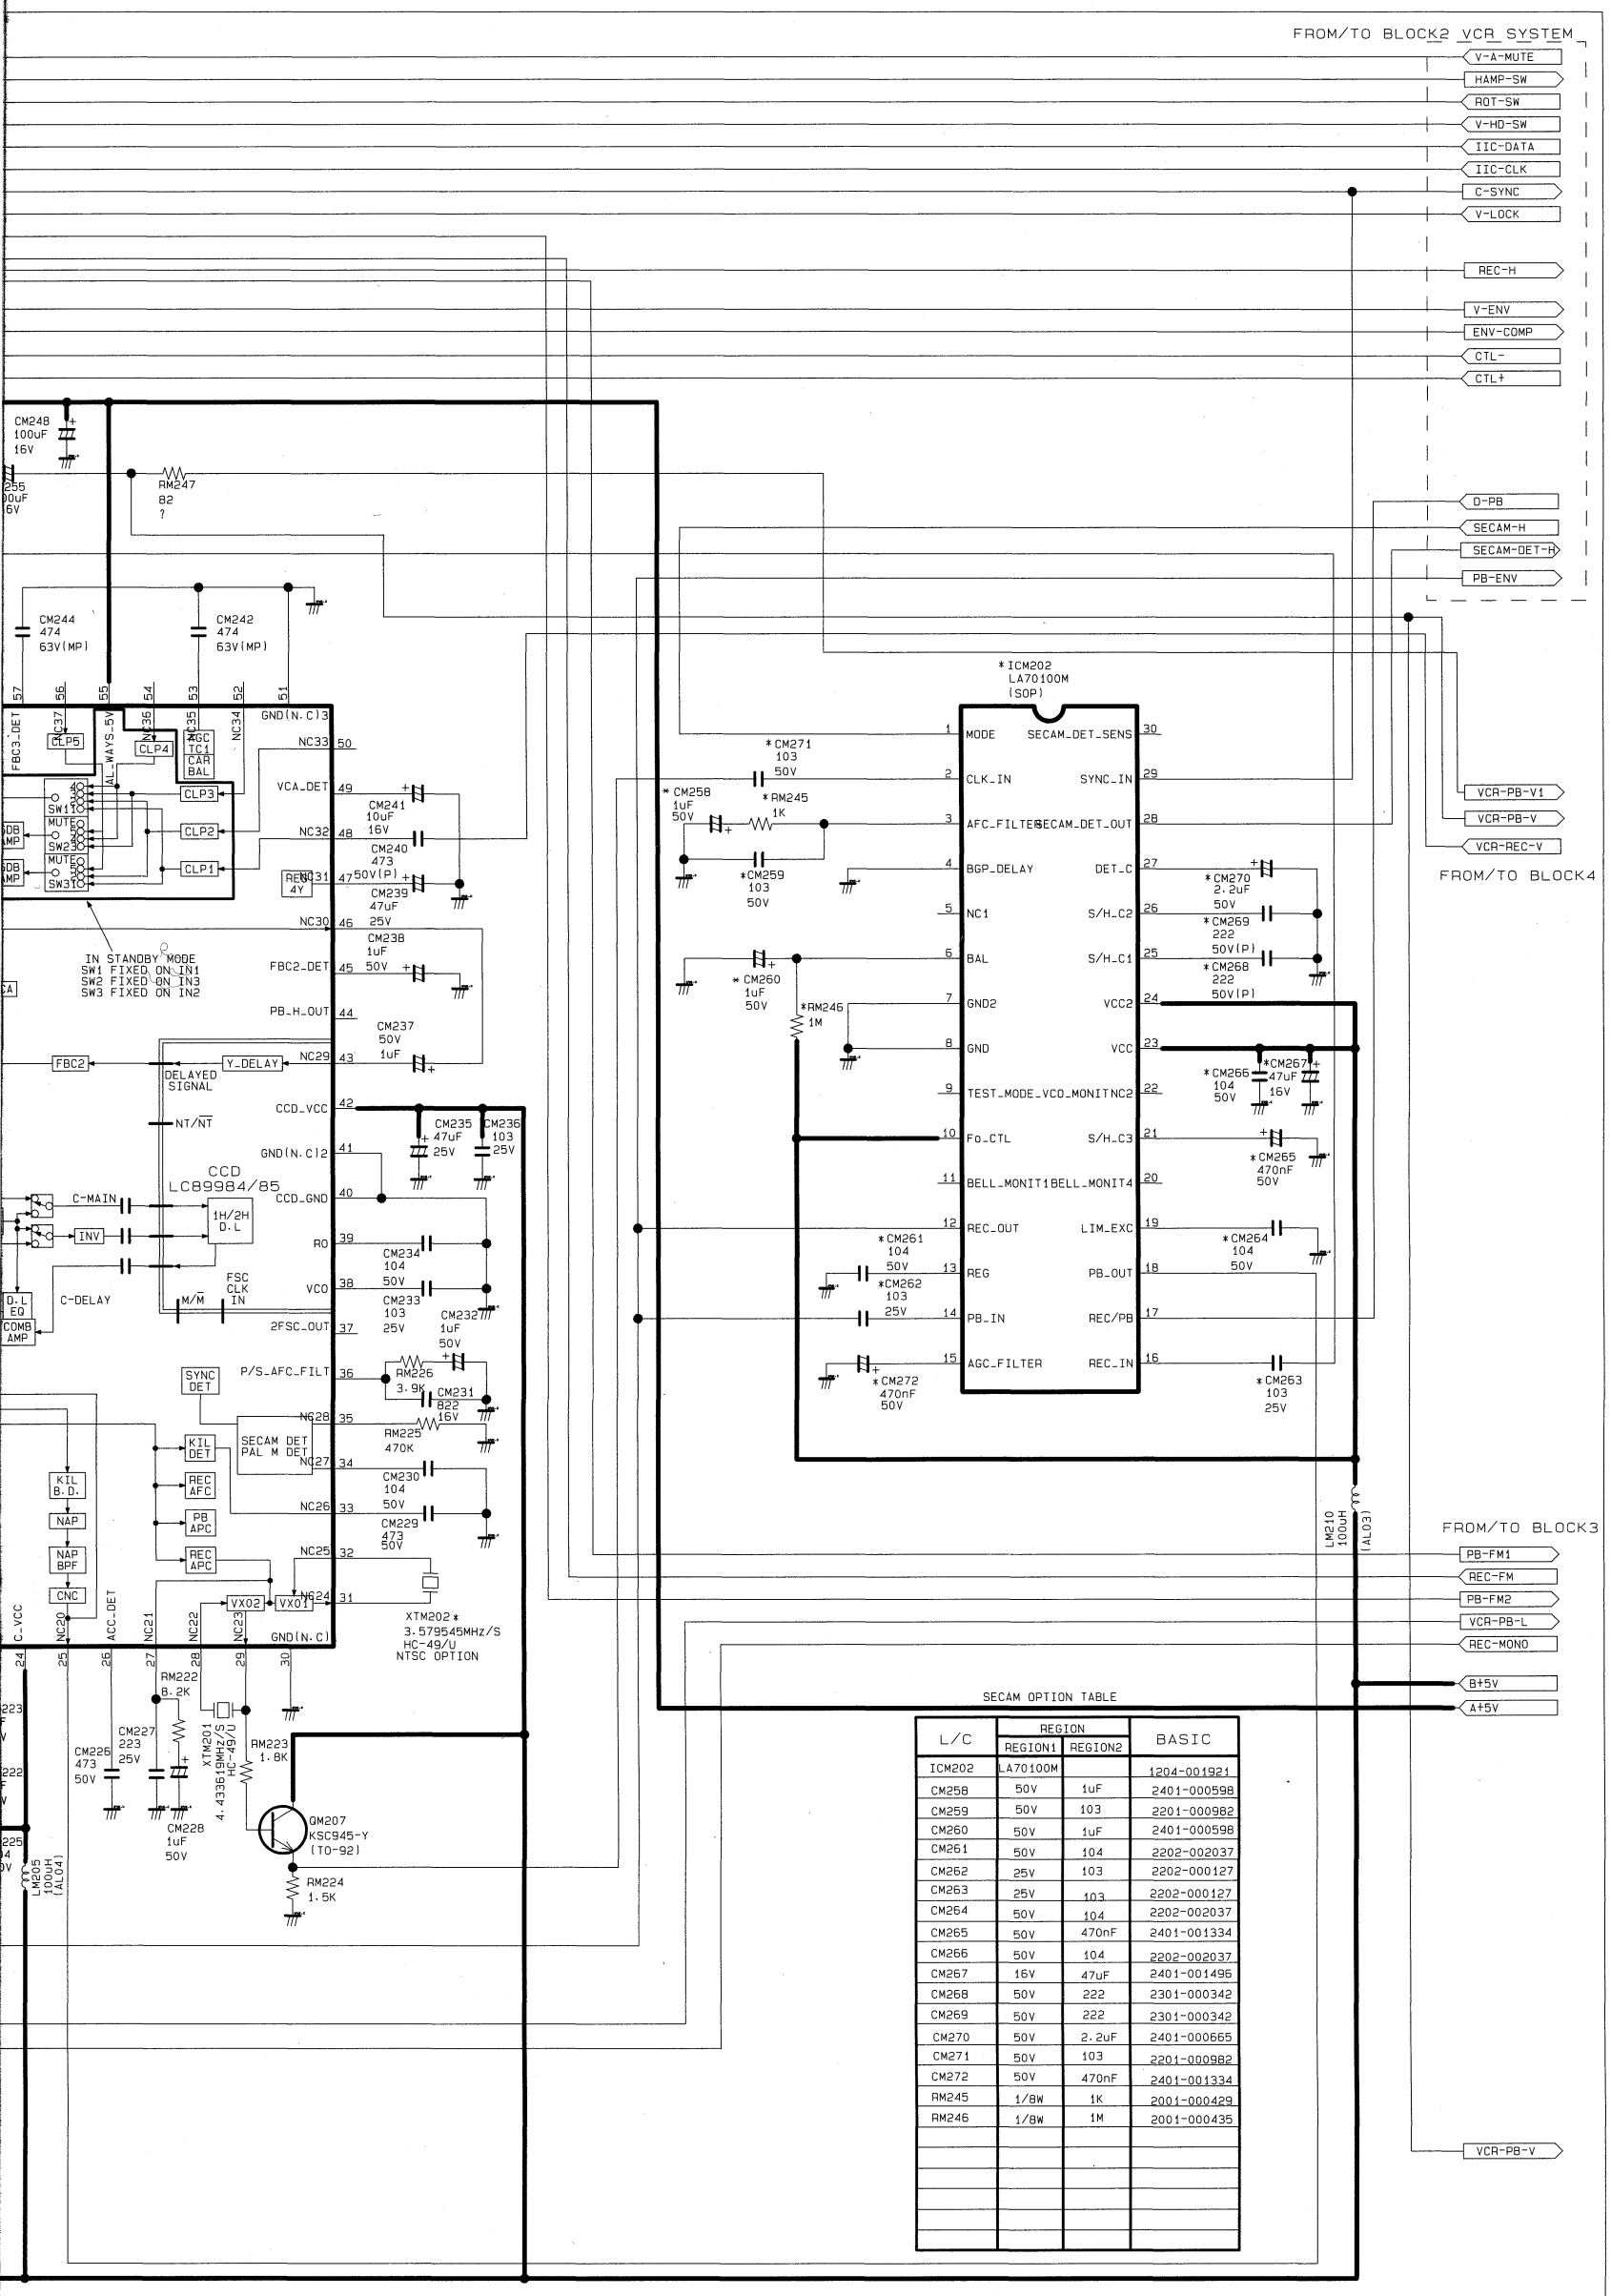

L/C	REGION		BASIC
	REGION1	REGION2	
ICM202	LA70100M		1204-001921
CM258	50V	1uF	2401-000598
CM259	50V	103	2201-000982
CM260	50V	1uF	2401-000598
CM261	50V	104	2202-002037
CM262	25V	103	2202-000127
CM263	25V	103	2202-000127
CM264	50V	104	2202-002037
CM265	50V	470nF	2401-001334
CM266	50V	104	2202-002037
CM267	16V	47uF	2401-001496
CM268	50V	222	2301-000342
CM269	50V	222	2301-000342
CM270	50V	2.2uF	2401-000665
CM271	50V	103	2201-000982
CM272	50V	470nF	2401-001334
RM245	1/8W	1K	2001-000429
RM246	1/8W	1M	2001-000435

7-2 MAIN 2

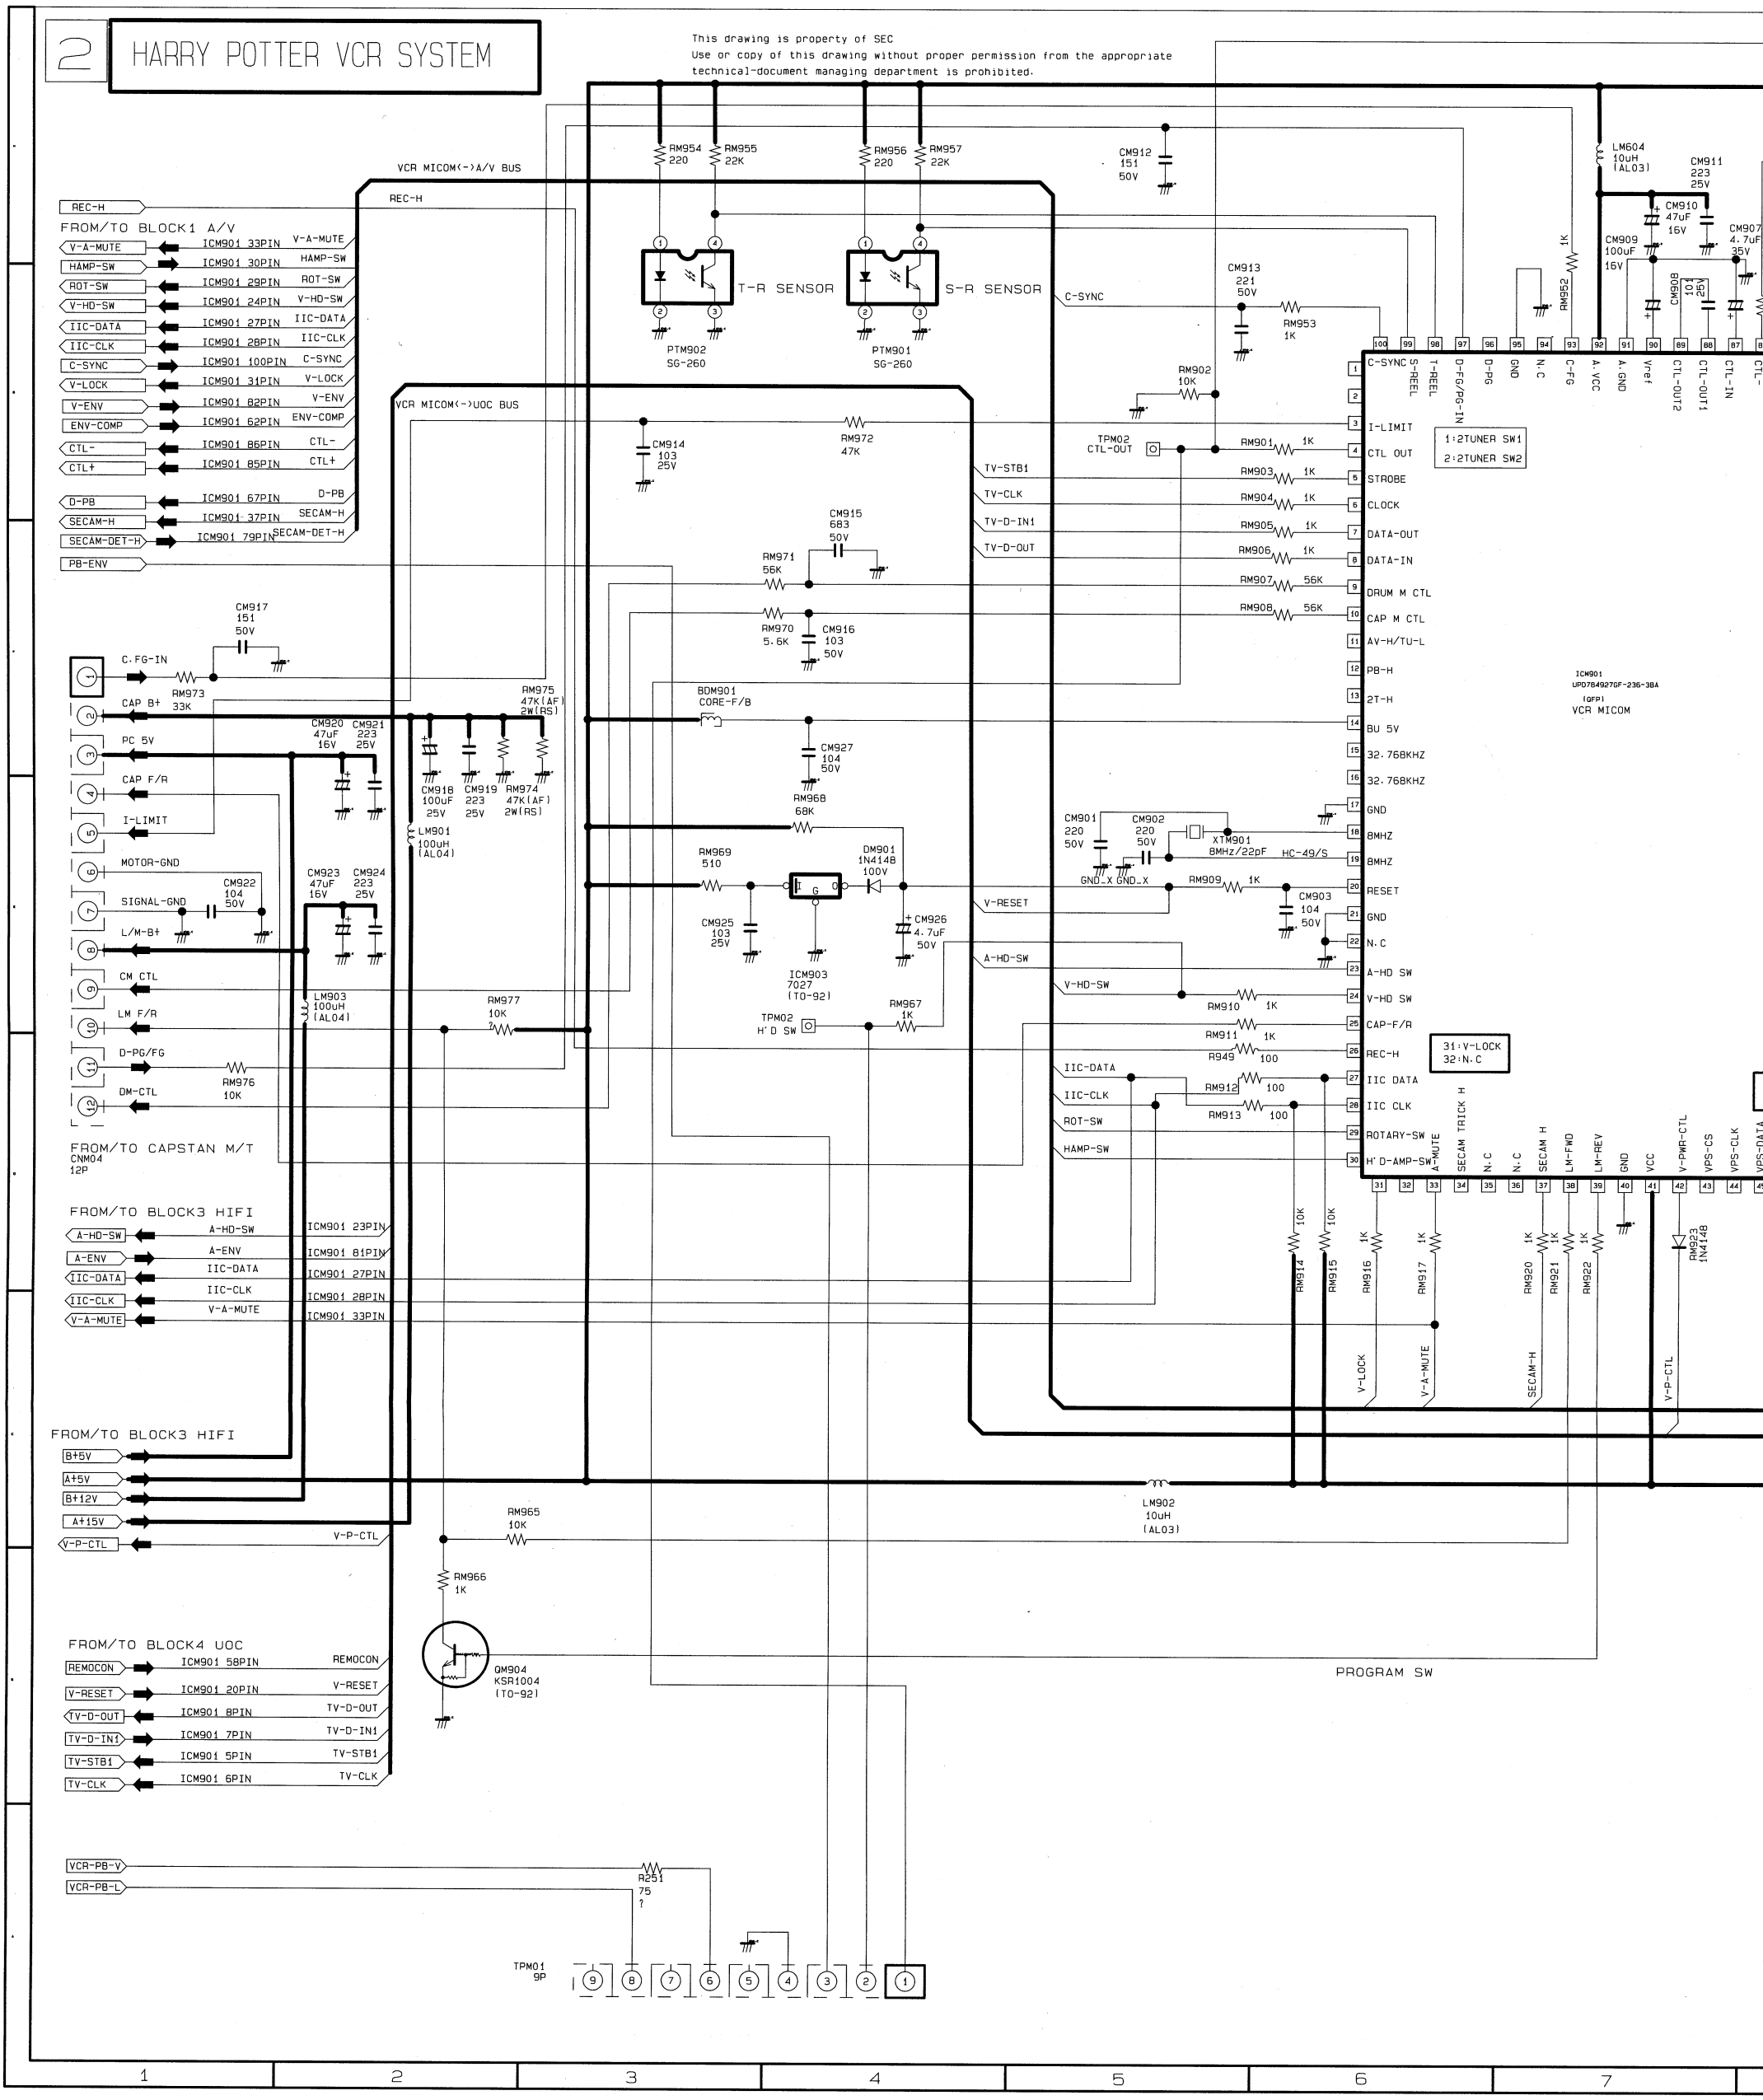
2 HARRY POTTER VCR SYSTEM
This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.
VCR MICOM<->A/V BUS
VCR MICOM<->UOC BUS
REC-H
FROM/TO BLOCK1 A/V
V-A-MUTE
HAMP-SW
ROT-SW
V-HD-SW
IIC-DATA
IIC-CLK
C-SYNC
V-LOCK
V-ENV
ENV-COMP
CTL-
CTL+
D-PB
SECAM-H
SECAM-DET-H
PB-ENV
RM954 220
RM955 22K
RM956 220
RM957 22K
T-R SENSOR
S-R SENSOR
PTM902 SG-260
PTM901 SG-260
CM912 151 50V
CM913 221 50V
RM953 1K
RM902 10K
TPM02 CTL-OUT
RM901 1K
RM903 1K
RM904 1K
RM905 1K
RM906 1K
RM907 56K
RM908 56K
LM604 10uH (AL03)
CM911 223 25V
CM910 47uF 16V
CM909 100uF 16V
CM908 101 25V
CM907 4.7uF 35V
RM952 1K
C-SYNC
S-REEL
T-REEL
D-FG/PG-IN
D-PG
GND
N.C
C-FG
A.VCC
A.GND
Vref
CTL-OUT2
CTL-OUT1
CTL-IN
I-LIMIT
CTL OUT
STROBE
CLOCK
DATA-OUT
DATA-IN
DRUM M CTL
CAP M CTL
AV-H/TU-L
PB-H
2T-H
BU 5V
32.768KHZ
32.768KHZ
GND
8MHZ
8MHZ
RESET
GND
N.C
A-HD SW
V-HD SW
CAP-F/R
REC-H
IIC DATA
IIC CLK
ROTARY-SW
H' D-AMP-SW
1:2TUNER SW1
2:2TUNER SW2
31:V-LOCK
32:N.C
SECAM TRICK H
N.C
N.C
SECAM H
LM-FWD
LM-REV
GND
VCC
V-PWR-CTL
VPS-CS
VPS-CLK
VPS-DATA
ICM901 UPD784927GF-236-3BA (QFP) VCR MICOM
CM914 103 25V
RM972 47K
CM915 683 50V
RM971 56K
RM970 5.6K
CM916 103 50V
BDM901 CORE-F/B
CM927 104 50V
RM968 68K
RM969 510
DM901 1N4148 100V
CM925 103 25V
CM926 4.7uF 50V
ICM903 7027 (TO-92)
TPM02 H' D SW
RM967 1K
V-RESET
A-HD-SW
V-HD-SW
IIC-DATA
IIC-CLK
ROT-SW
HAMP-SW
CM901 220 50V
CM902 220 50V
XTM901 8MHz/22pF HC-49/S
GND-X GND-X
RM909 1K
CM903 104 50V
RM910 1K
RM911 1K
R949 100
RM912 100
RM913 100
RM914 10K
RM915 10K
RM916 1K
RM917 1K
RM920 1K
RM921 1K
RM922 1K
RM923 1N4148
V-LOCK
V-A-MUTE
SECAM-H
V-P-CTL
FROM/TO CAPSTAN M/T CNM04 12P
CM917 151 50V
C.FG-IN
RM973 33K
CAP B+
PC 5V
CAP F/R
I-LIMIT
MOTOR-GND
SIGNAL-GND
L/M-B+
CM CTL
LM F/R
D-PG/FG
DM-CTL
CM920 47uF 16V
CM921 223 25V
CM922 104 50V
CM923 47uF 16V
CM924 223 25V
CM918 100uF 25V
CM919 223 25V
RM974 47K(AF) 2W(RS)
RM975 47K(AF) 2W(RS)
RM976 10K
RM977 10K
LM901 100uH (AL04)
LM903 100uH (AL04)
FROM/TO BLOCK3 HIFI
A-HD-SW
A-ENV
IIC-DATA
IIC-CLK
V-A-MUTE
ICM901 23PIN
ICM901 81PIN
ICM901 27PIN
ICM901 28PIN
ICM901 33PIN
FROM/TO BLOCK3 HIFI
B+5V
A+5V
B+12V
A+15V
V-P-CTL
LM902 10uH (AL03)
RM965 10K
RM966 1K
QM904 KSR1004 (TO-92)
PROGRAM SW
FROM/TO BLOCK4 UOC
REMOCON
V-RESET
TV-D-OUT
TV-D-IN1
TV-STB1
TV-CLK
ICM901 58PIN
ICM901 20PIN
ICM901 8PIN
ICM901 7PIN
ICM901 5PIN
ICM901 6PIN
VCR-PB-V
VCR-PB-L
R251 75 ?
TPM01 9P

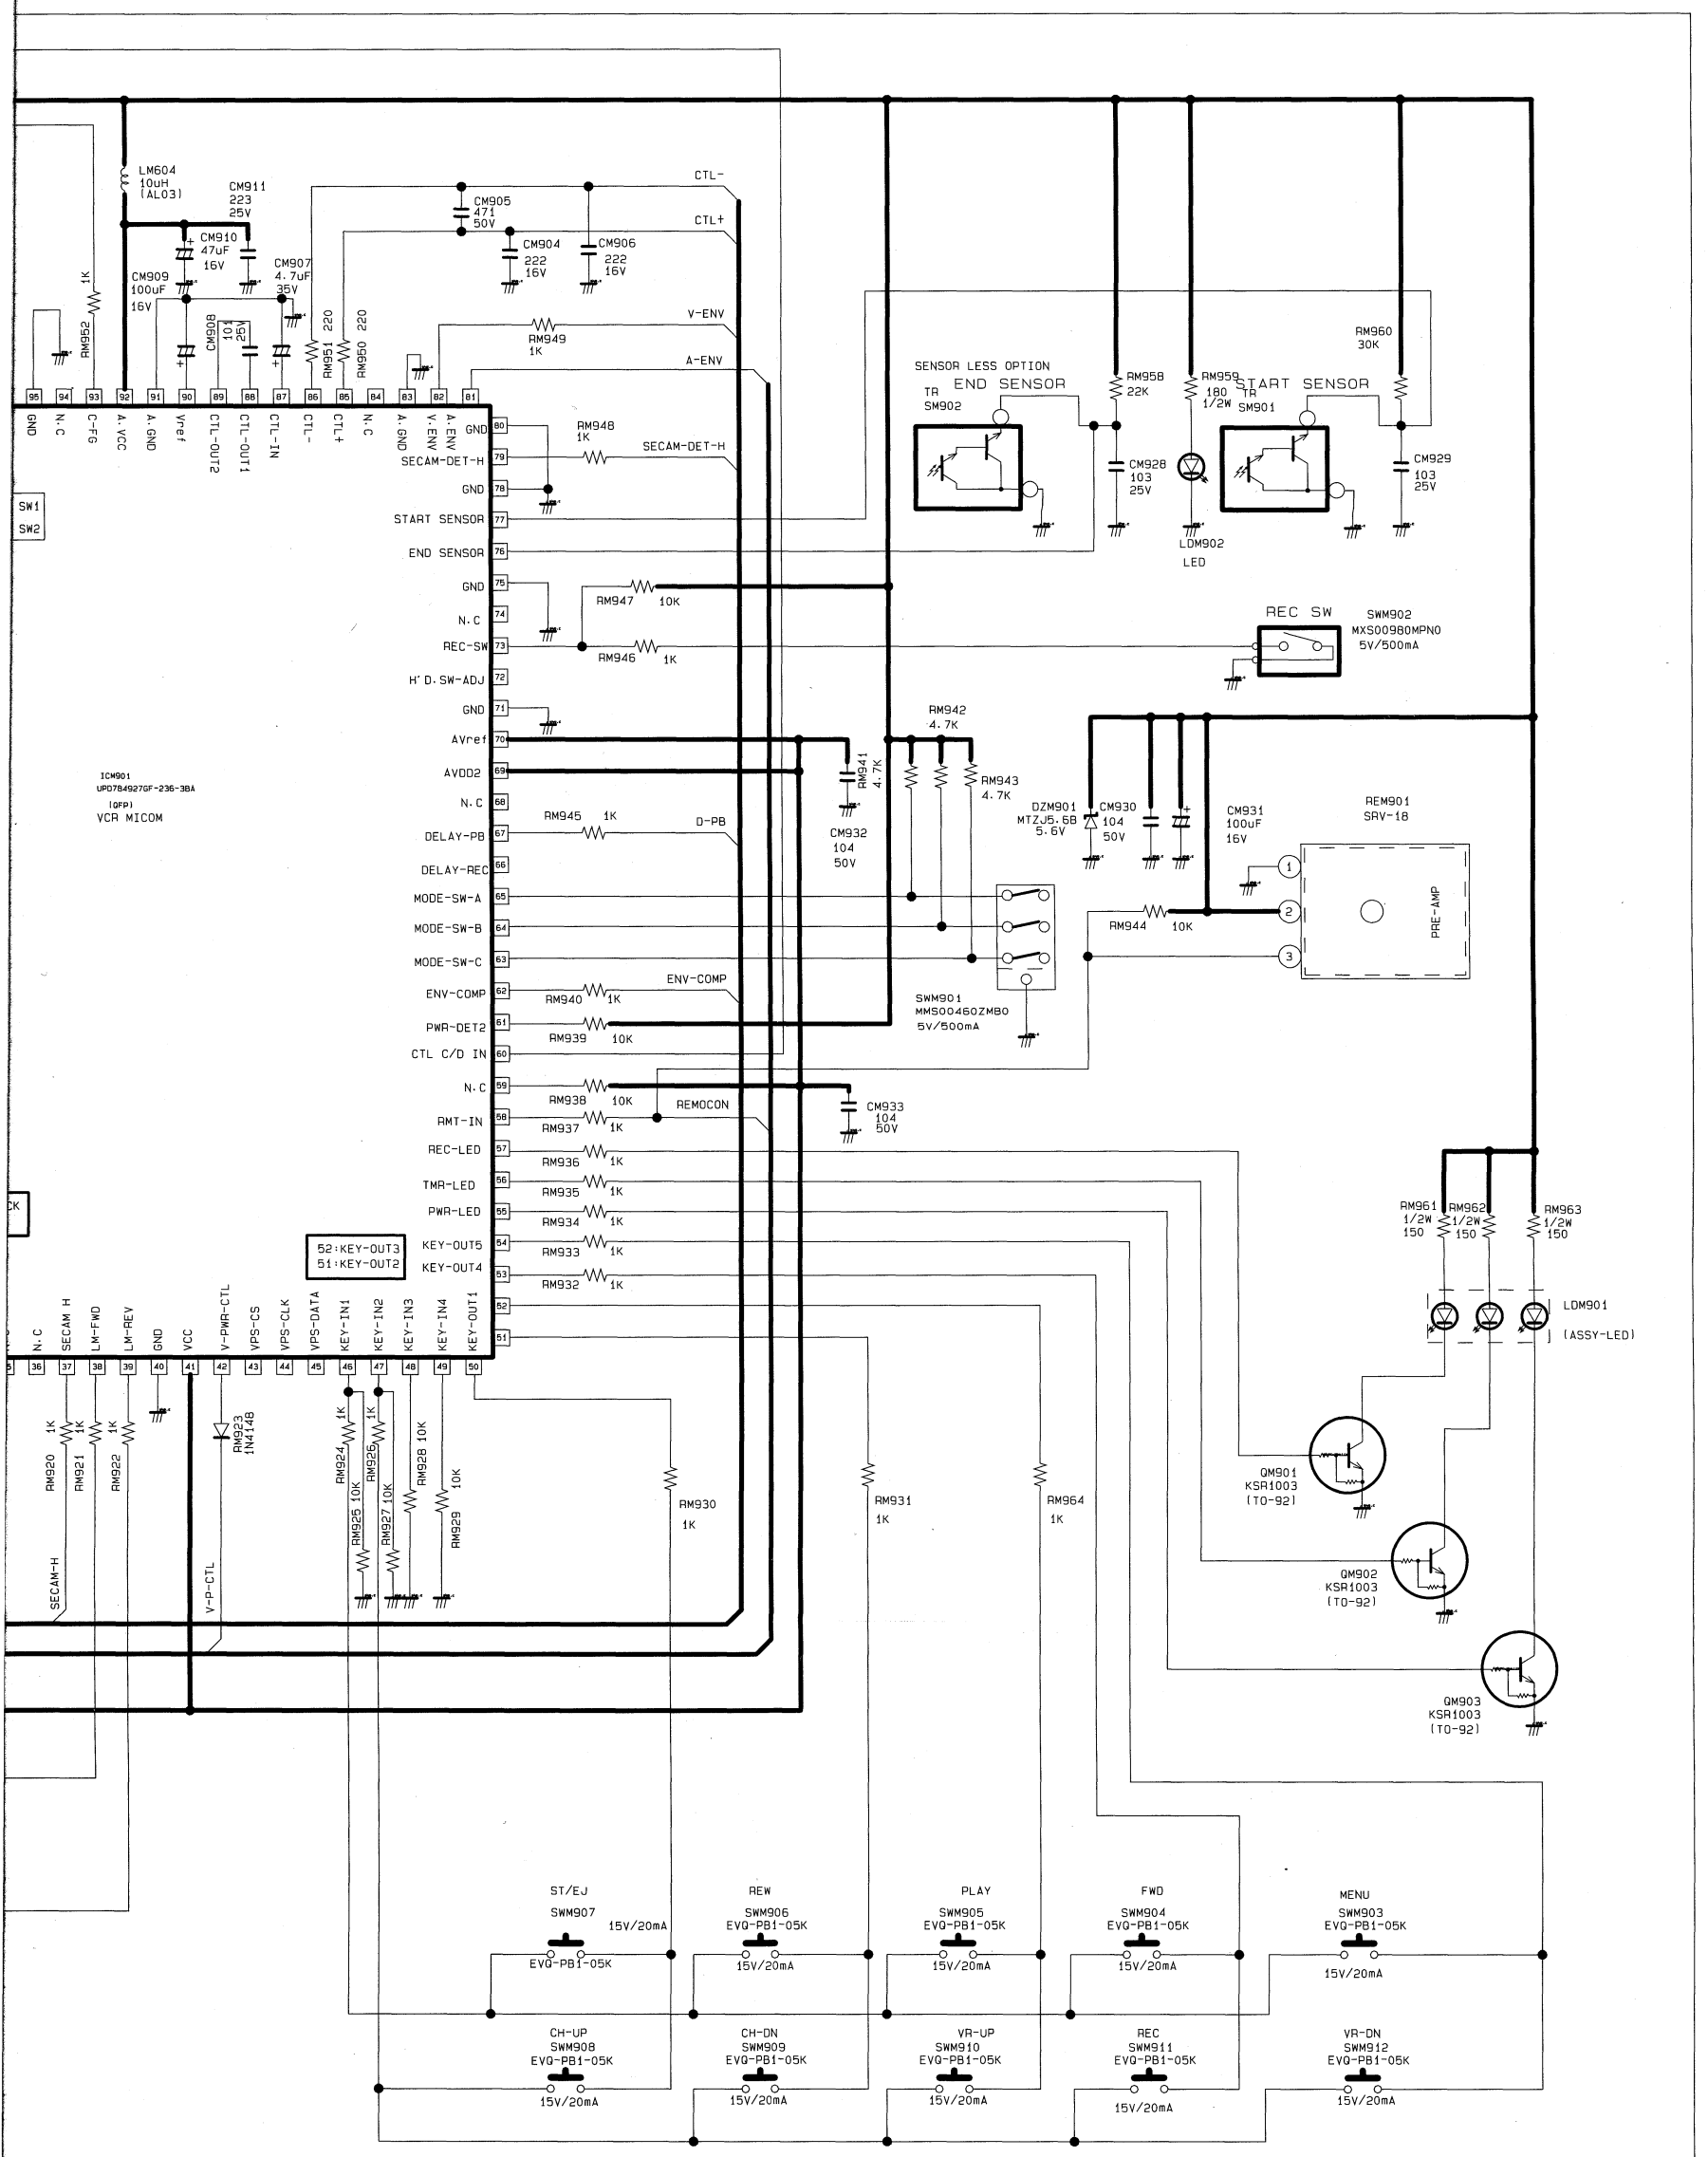

PANNEL KEY-MATRIX

VCR TEST CONNECTION

7	8	9	10	11	12

3 HARRY POTTER HI-FI / VCR POWER

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate
technical-document managing department is prohibited.

FROM/TO INTERFACE

CN002 12P

A+14V(DVD)
A+6.2V(D)
REMOCON
TV-CLK
A+5.6V
TV-D-OUT
TV-D-IN2
TV-STB2

CN004 8P
FROM DVD INTERFACE

DVD-C
DVD-Y
N.C : DVD CVBS
DVD-A-LT
DVD-A-RT

CN001 14P
FROM POWER

AL33V
B+8V
TV-V-CTL
A+6.2V(D)
A+5.6V
A+15V
AMP-MUTE
D-COIL
AMP-L
AMP-R

D102 1N4148 100V
D101 1N4004 400V
TV-P-CTL

VCR-REC-R
VCR-PB-L
VCR-PB-R
VCR-PB-L
VCR-REC-L
REC-MONO

RM609 43K
RM608 6.2K
RM615 10K ?
RM610 33K
CM624 104 50V
RM611 47K
CM625 4.7uF 35V
RM612 47K
CM626 4.7uF 35V
RM614 43K
RM613 6.2K

ICM601 LA72634AM (QFP)

CM623 1uF 50V
CM622 22uF 16V
CM621 4.7uF 35V
CM620 103 50V(P)
CM619 22uF 16V
CM618 472 50V(P)
CM617 332 50V(P)

R-CH IN SEL
ALC
R-CH PNR
SERIAL DATA DECODER
HOLD PULSE
LIM
SW NOISE
NOR SEL
DEV
NOISE DET
VCO
Ø COMP
R-CH BPF
CURRENT AMP
LPF
L-CH BPF
MIX
OUT SEL
MU
ALC
Rch
AGC
AMP
DET
DO DET
ENV DET
POWER MUTE
L-CH
VREF

CM601 10uF 35V
CM602 1uF 50V
CM603 22uF 16V
CM604 4.7uF 35V
CM605 103 50V(P)
CM606 22uF 16V
CM607 22uF 16V
CM608 47uF 16V
CM609 104 50V
CM610 472 50V(P)
CM611 332 50V(P)
CM627 104 50V
CM62 47uF 16V
LM601 10uH (AL03)

QM804 KSC2328A-Y (TO-92L)
RM804 220 1/2W
DZM802 MTZJ5.1B 5.1V
DM804 1N4148 100V
CM805 47uF 25V
CM803 104 50V
DM802 1N4004 400V
DM806 1N4004 400V
QM802 KSR2001 (TO-92)
RM801 470 1/2W
RM802 2.2K
QM801 KSC2328A-Y (TO-92L)
DZM801 MTZJ12B 12.03V
DM803 1N4148 100V
CM808 47uF 16V
CM809 104 50V
QM803 KSR1003 (TO-92)
RM803 1K
CM801 1uF 50V
CM806 470uF 16V
RM811 1K
LM802 100uH (AL04)
QM805 KSC2328A-Y (TO-92L)
RM806 150 1/2W
DZM803 MTZJ9.1B 9.1V
DM805 1N4148 100V

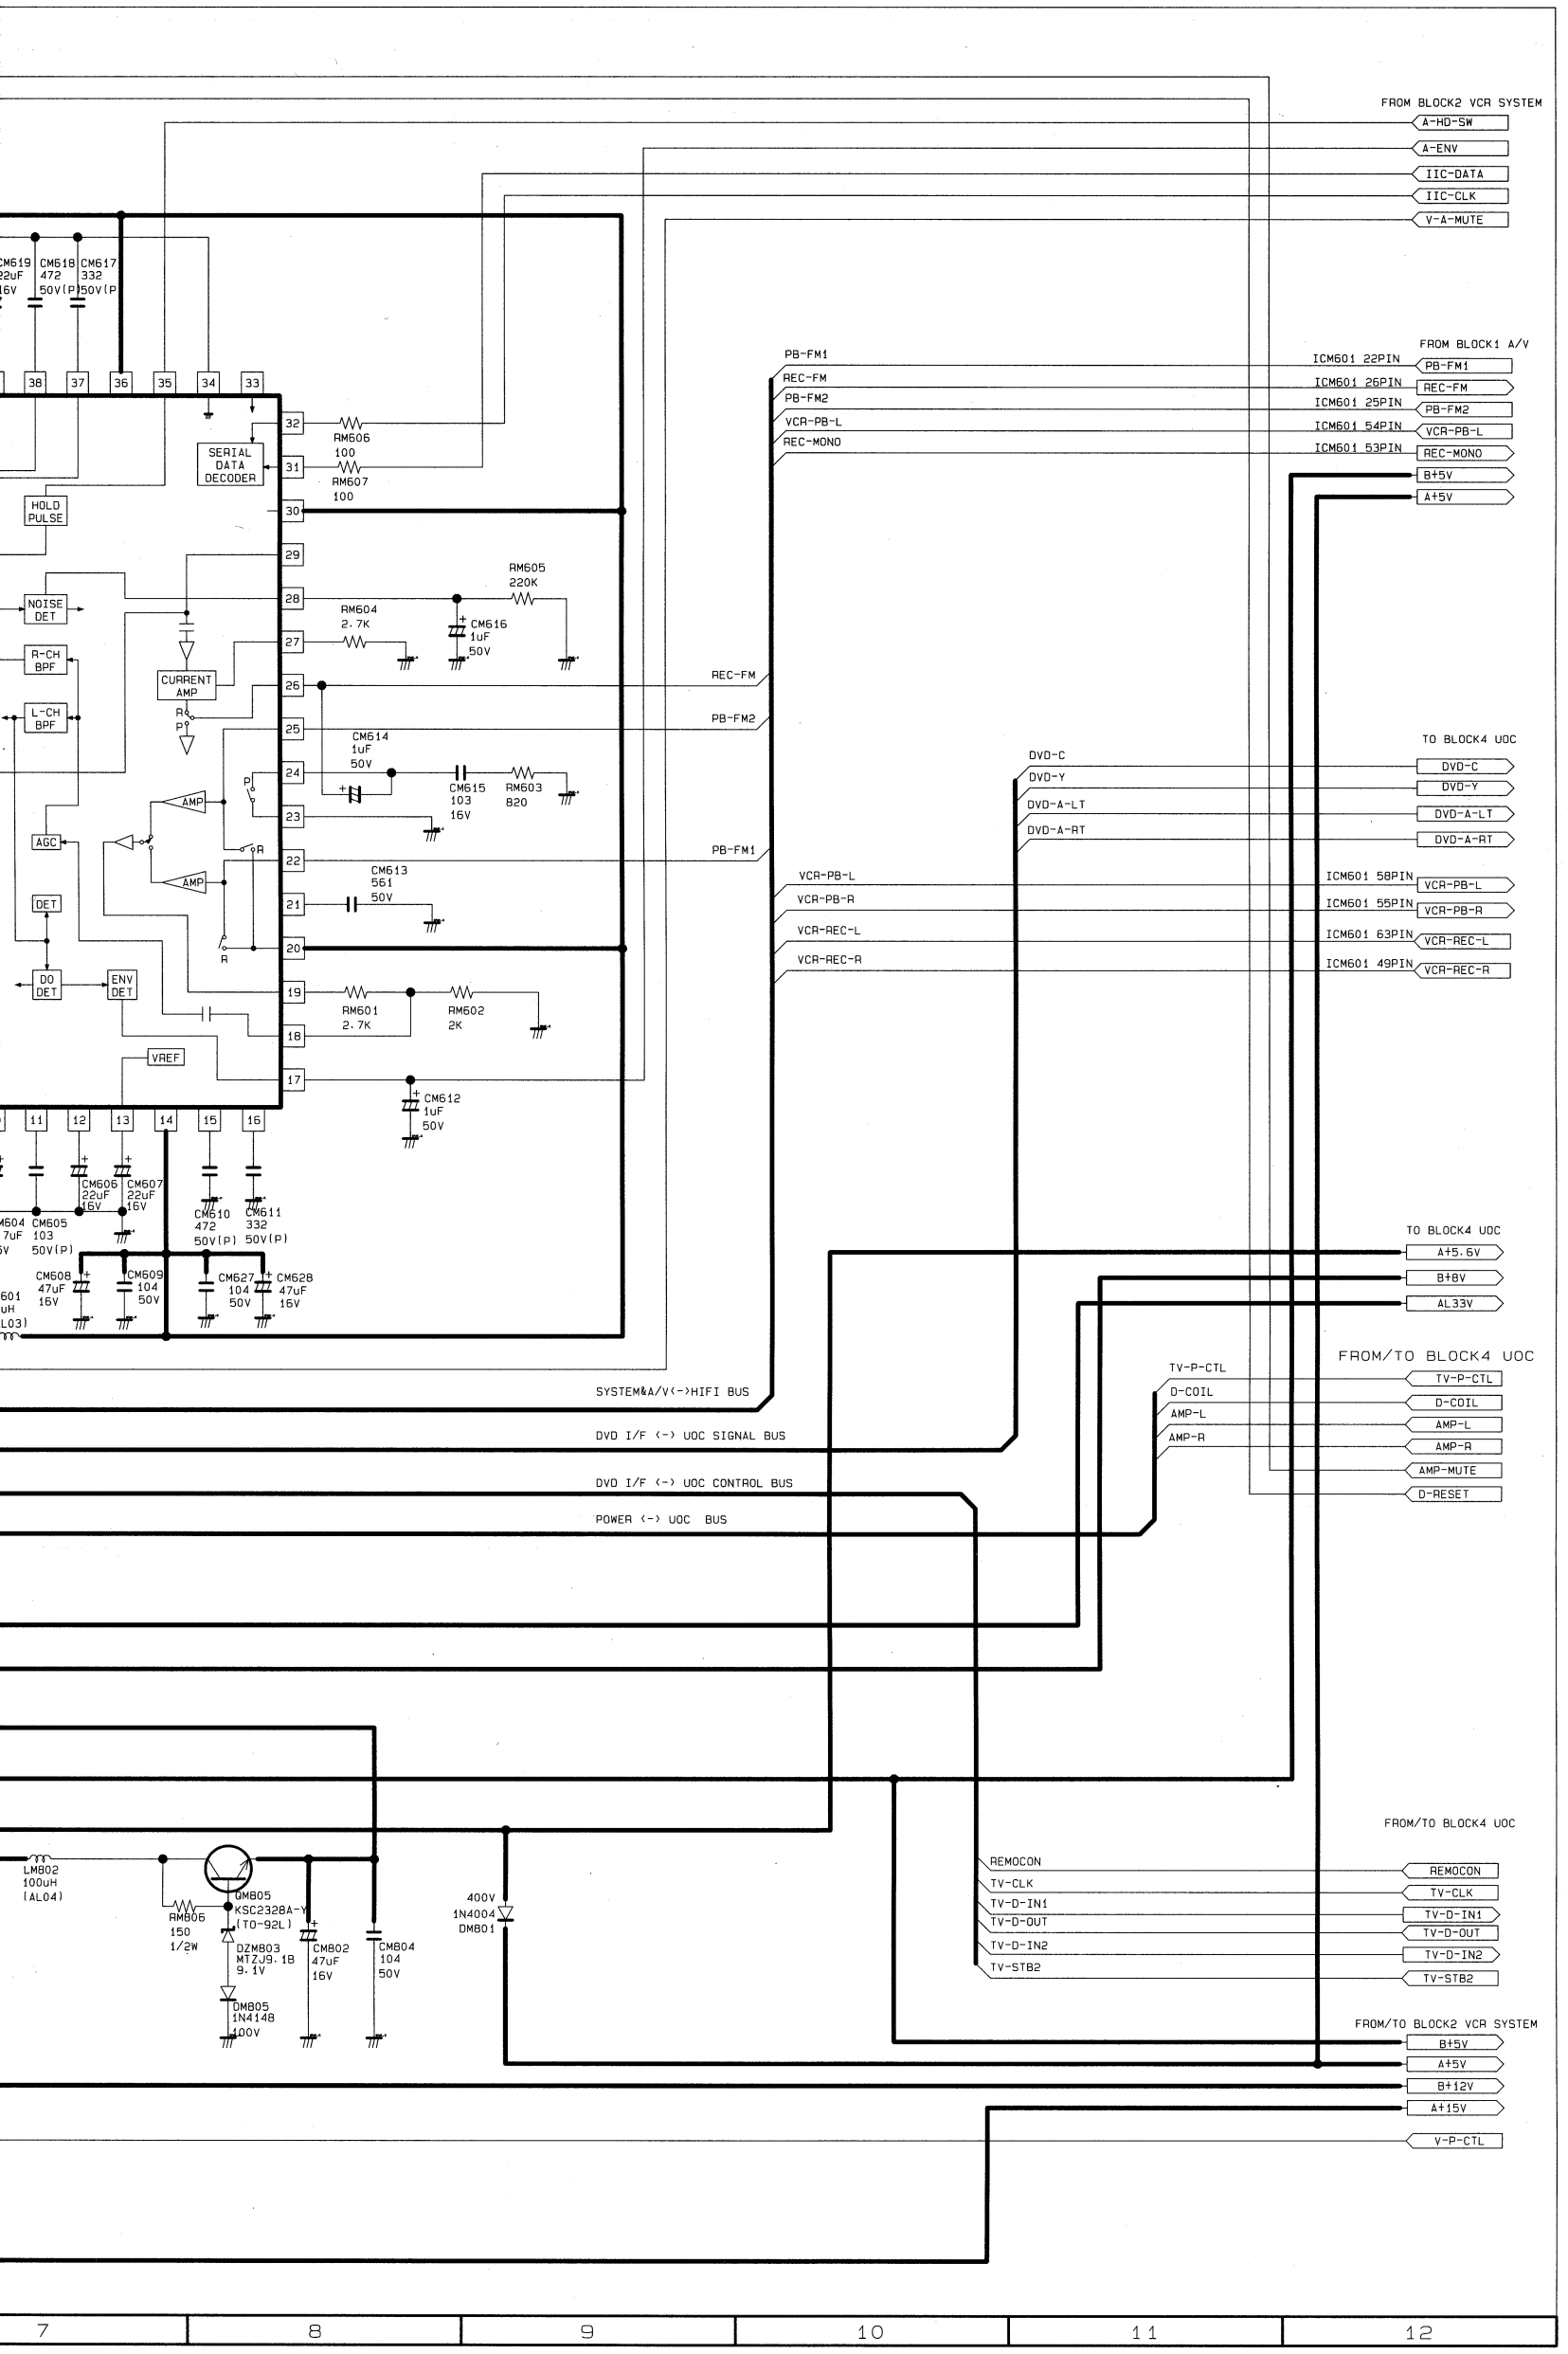
FROM BLOCK2 VCR SYSTEM
A-HD-SW
A-ENV
IIC-DATA
IIC-CLK
V-A-MUTE
FROM BLOCK1 A/V
PB-FM1
REC-FM
PB-FM2
VCR-PB-L
REC-MONO
ICM601 22PIN
ICM601 26PIN
ICM601 25PIN
ICM601 54PIN
ICM601 53PIN
B+5V
A+5V
SERIAL DATA DECODER
HOLD PULSE
NOISE DET
R-CH BPF
L-CH BPF
CURRENT AMP
AMP
AGC
DET
DO DET
ENV DET
VREF
RM606 100
RM607 100
RM605 220K
RM604 2.7K
CM616 1uF 50V
CM614 1uF 50V
CM615 103 16V
RM603 820
CM613 561 50V
RM601 2.7K
RM602 2K
CM612 1uF 50V
CM606 22uF 16V
CM607 22uF 16V
CM610 472 50V(P)
CM611 332 50V(P)
CM605 103 50V(P)
CM608 47uF 16V
CM609 104 50V
CM627 104 50V
CM628 47uF 16V
REC-FM
PB-FM2
PB-FM1
TO BLOCK4 UOC
DVD-C
DVD-Y
DVD-A-LT
DVD-A-RT
VCR-PB-L
VCR-PB-R
VCR-REC-L
VCR-REC-R
ICM601 58PIN
ICM601 55PIN
ICM601 63PIN
ICM601 49PIN
TO BLOCK4 UOC
A+5.6V
B+8V
AL33V
FROM/TO BLOCK4 UOC
TV-P-CTL
D-COIL
AMP-L
AMP-R
AMP-MUTE
D-RESET
SYSTEM&A/V<->HIFI BUS
DVD I/F <-> UOC SIGNAL BUS
DVD I/F <-> UOC CONTROL BUS
POWER <-> UOC BUS
LM802 100uH (AL04)
RM806 150 1/2W
DM805 KSC2328A-Y (TO-92L)
DZM803 MTZJ9.1B 9.1V
DM805 1N4148 400V
CM802 47uF 16V
CM804 104 50V
400V 1N4004 DM801
FROM/TO BLOCK4 UOC
REMOCON
TV-CLK
TV-D-IN1
TV-D-OUT
TV-D-IN2
TV-STB2
FROM/TO BLOCK2 VCR SYSTEM
B+5V
A+5V
B+12V
A+15V
V-P-CTL

7	8	9	10	11	12

7-4 MAIN 4

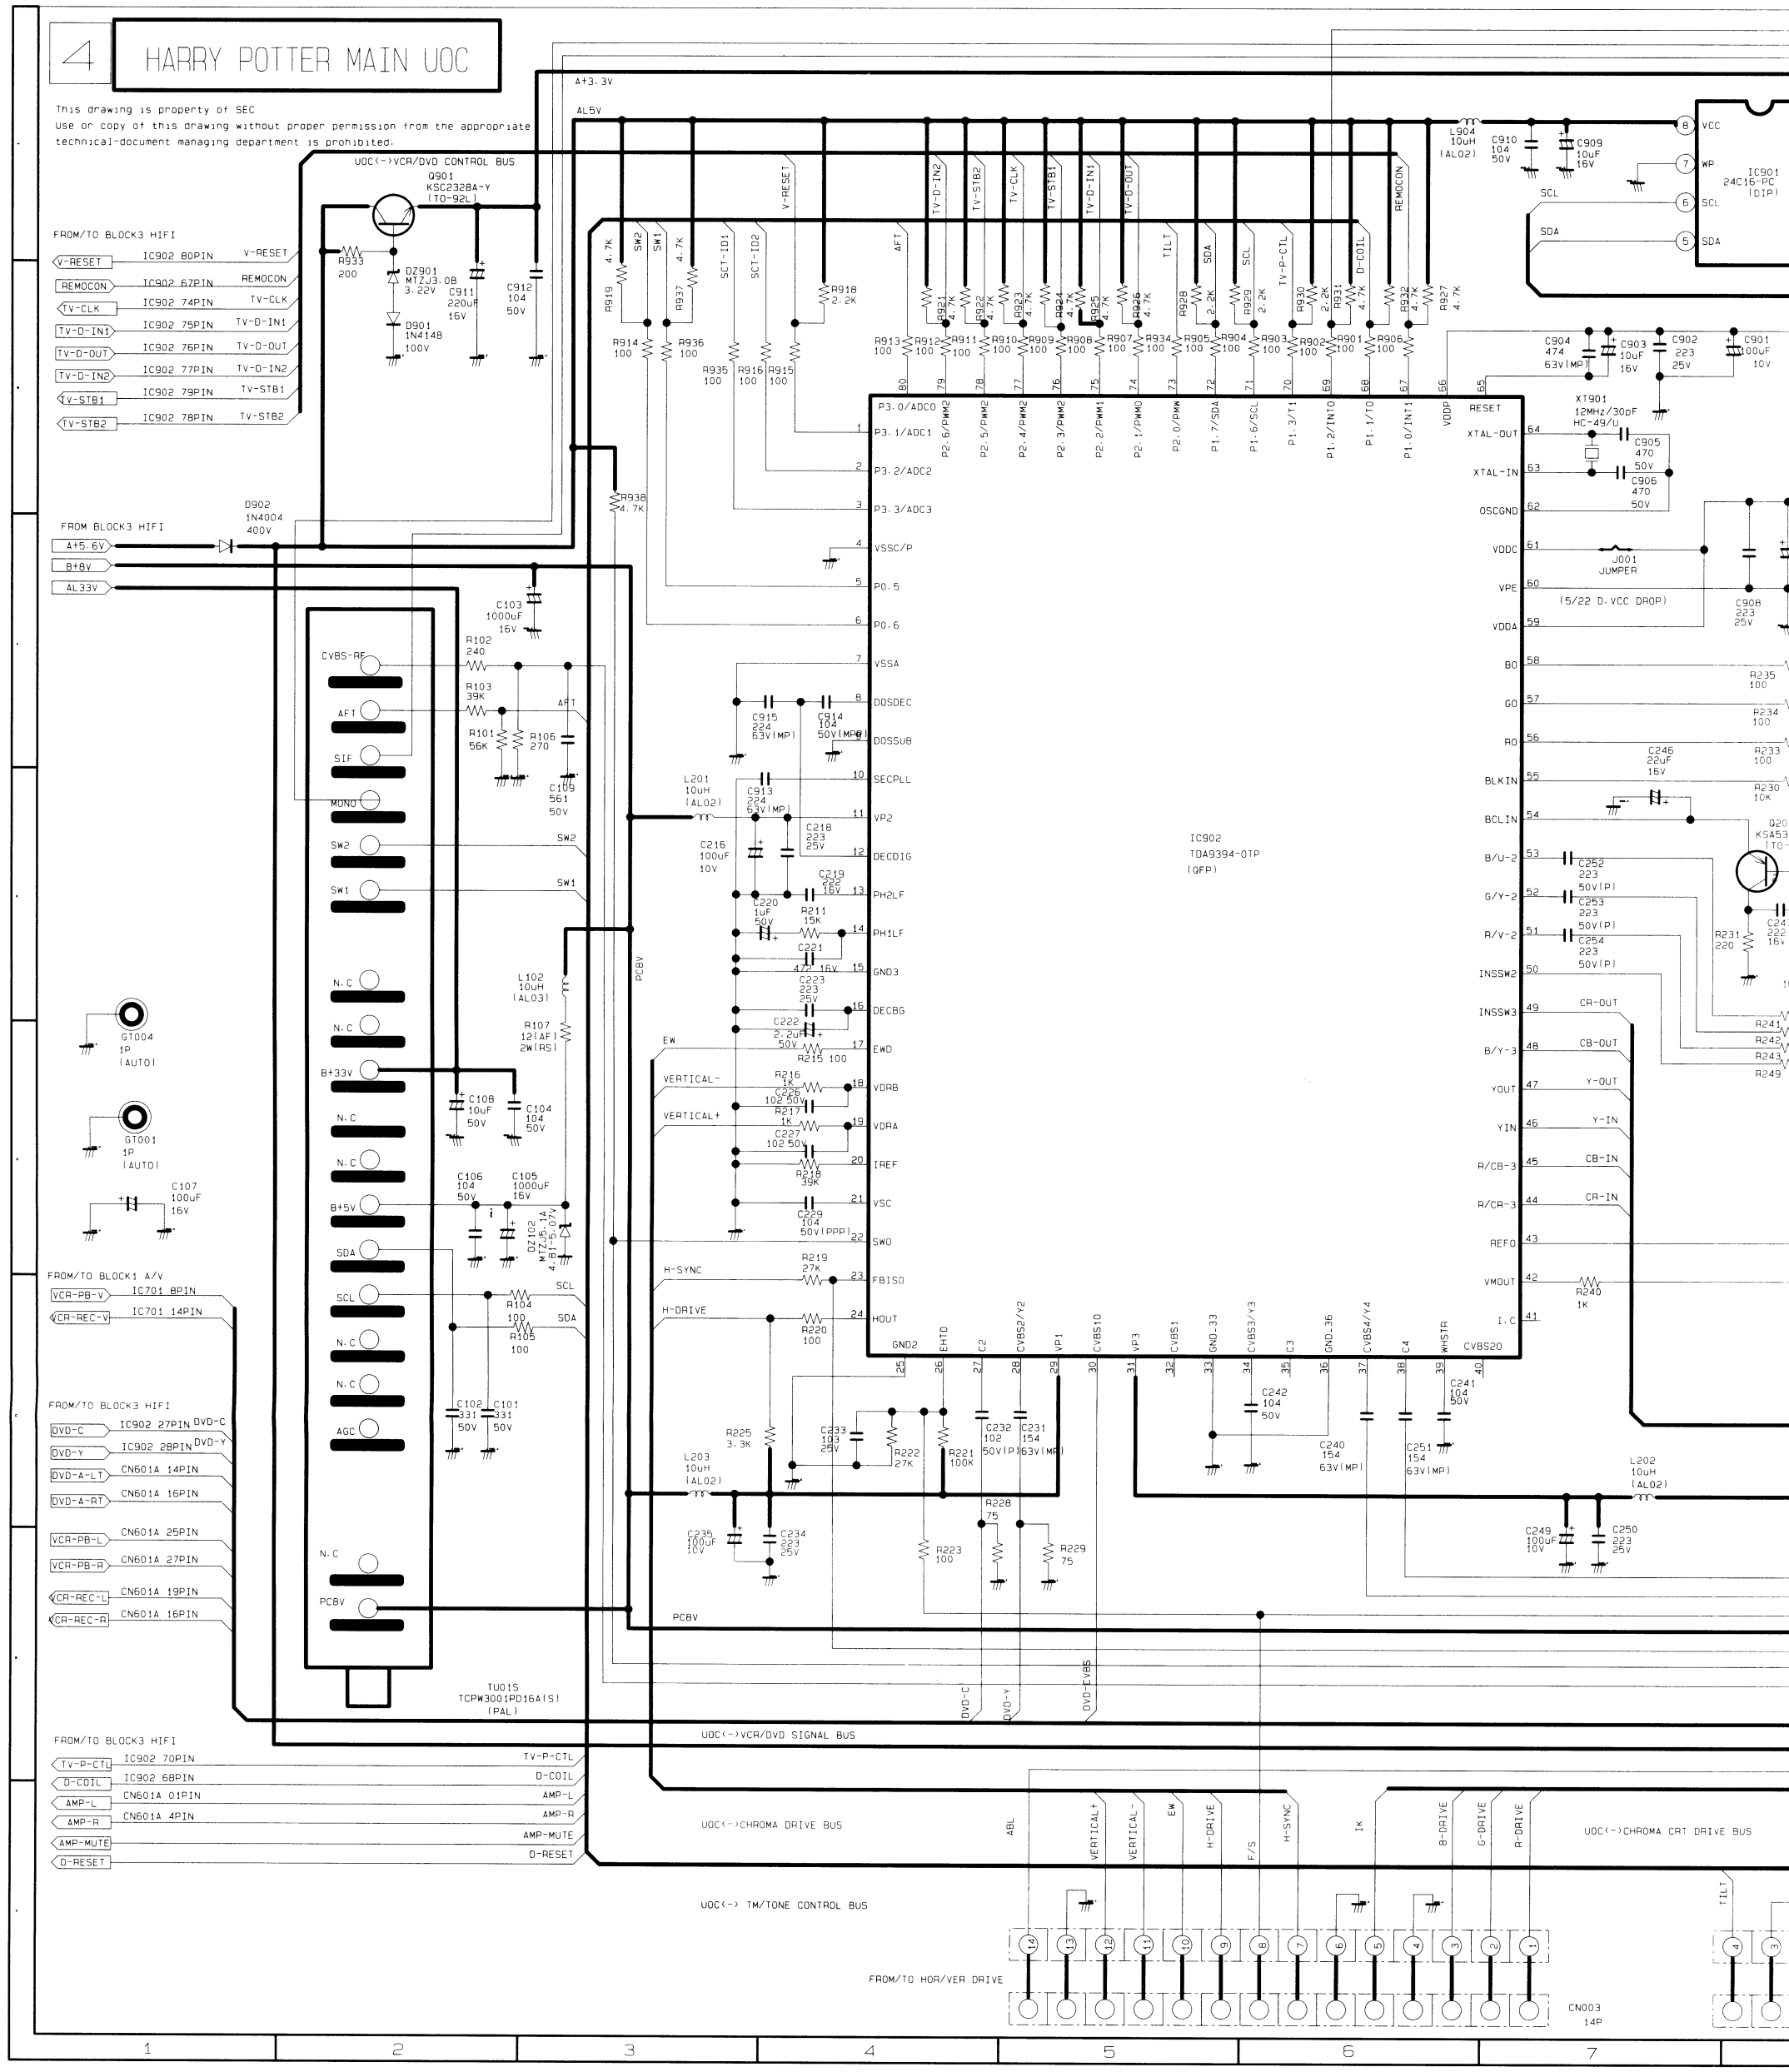
4
HARRY POTTER MAIN UOC
This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.
A+3.3V
AL5V
UOC(-)VCR/DVD CONTROL BUS
Q901 KSC2328A-Y (TO-92L)
FROM/TO BLOCK3 HIFI
V-RESET IC902 80PIN V-RESET
REMOCON IC902 67PIN REMOCON
TV-CLK IC902 74PIN TV-CLK
TV-D-IN1 IC902 75PIN TV-D-IN1
TV-D-OUT IC902 76PIN TV-D-OUT
TV-D-IN2 IC902 77PIN TV-D-IN2
TV-STB1 IC902 79PIN TV-STB1
TV-STB2 IC902 78PIN TV-STB2
R933 200
DZ901 MTZJ3.0B 3.22V
D901 1N4148 100V
C911 220uF 16V
C912 104 50V
D902 1N4004 400V
FROM BLOCK3 HIFI
A+5.6V
B+8V
AL33V
C103 1000uF 16V
R102 240
R103 39K
R101 56K
R106 270
C109 561 50V
CVBS-RF
AFT
SIF
MONO
SW2
SW1
N.C
B+33V
B+5V
SDA
SCL
AGC
PCBV
L102 10uH (AL03)
R107 12(AF) 2W(RS)
C108 10uF 50V
C104 104 50V
C106 104 50V
C105 1000uF 16V
DZ102 MTZJ5.1A 4.81~5.07V
C107 100uF 16V
GT004 1P (AUTO)
GT001 1P (AUTO)
R104 100
R105 100
C102 331 50V
C101 331 50V
FROM/TO BLOCK1 A/V
VCR-PB-V IC701 8PIN
VCR-REC-V IC701 14PIN
FROM/TO BLOCK3 HIFI
DVD-C IC902 27PIN DVD-C
DVD-Y IC902 28PIN DVD-Y
DVD-A-LT CN601A 14PIN
DVD-A-RT CN601A 16PIN
VCR-PB-L CN601A 25PIN
VCR-PB-A CN601A 27PIN
VCR-REC-L CN601A 19PIN
VCR-REC-R CN601A 16PIN
TU01S TCPW3001PD16A(S) (PAL)
FROM/TO BLOCK3 HIFI
TV-P-CTL IC902 70PIN TV-P-CTL
D-COIL IC902 68PIN D-COIL
AMP-L CN601A 01PIN AMP-L
AMP-R CN601A 4PIN AMP-R
AMP-MUTE AMP-MUTE
D-RESET D-RESET
R938 4.7K
R918 0.2K
R914 100
R936 100
R935 100
R916 100
R915 100
R919 4.7K
R937 4.7K
SW2
SW1
SCT-ID1
SCT-ID2
V-RESET
AFT
TV-D-IN2
TV-STB2
TV-CLK
TV-STB1
TV-D-IN1
TV-D-OUT
TILT
SDA
SCL
TV-P-CTL
D-COIL
REMOCON
R921 4.7K
R922 4.7K
R923 4.7K
R924 4.7K
R925 4.7K
R926 4.7K
R928 2.2K
R929 2.2K
R930 2.2K
R931 4.7K
R932 4.7K
R927 4.7K
R913 100
R912 100
R911 100
R910 100
R909 100
R908 100
R907 100
R934 100
R905 100
R904 100
R903 100
R902 100
R901 100
R906 100
L904 10uH (AL02)
C910 104 50V
C909 10uF 16V
IC901 24C16-PC (DIP)
SCL
SDA
C904 474 63V(MP)
C903 10uF 16V
C902 223 25V
C901 100uF 10V
XT901 12MHz/30pF HC-49/U
C905 470 50V
C906 470 50V
J001 JUMPER
(5/22 D.VCC DROP)
C908 223 25V
C246 22uF 16V
R235 100
R234 100
R233 100
R230 10K
R231 220
R241
R242
R243
R249
Q20 KSA53 (TO-
C24 222 16V
IC902
TDA9394-0TP
(QFP)
P3.0/ADC0
P3.1/ADC1
P3.2/ADC2
P3.3/ADC3
VSSC/P
P0.5
P0.6
VSSA
DOSDEC
DOSSUB
SECPLL
VP2
DECDIG
PH2LF
PH1LF
GND3
DECBG
EW
VD
VDRB
VDRA
IREF
VSC
SWO
FBISO
HOUT
GND2
EHTO
C2
CVBS2/Y2
VP1
CVBS10
VP3
CVBS1
GND.33
CVBS3/Y3
C3
GND.36
CVBS4/Y4
C4
WHSTR
CVBS20
RESET
XTAL-OUT
XTAL-IN
OSCGND
VDDC
VPE
VDDA
BO
GO
RO
BLKIN
BCLIN
B/U-2
G/Y-2
R/V-2
INSSW2
INSSW3
B/Y-3
YOUT
YIN
R/CB-3
R/CR-3
REFO
VMOUT
I.C
CR-OUT
CB-OUT
Y-OUT
Y-IN
CB-IN
CR-IN
R240 1K
C252 223 50V(P)
C253 223 50V(P)
C254 223 50V(P)
H-SYNC
H-DRIVE
R219 27K
R220 100
R225 3.3K
C233 102 25V
R222 27K
R221 100K
C232 102 50V(P)
C231 154 63V(MP)
C242 104 50V
C240 154 63V(MP)
C241 104 50V
C251 154 63V(MP)
L203 10uH (AL02)
L202 10uH (AL02)
C235 100uF 10V
C234 223 25V
R223 100
R228 75
R229 75
C249 100uF 10V
C250 223 25V
L201 10uH (AL02)
C915 224 63V(MP)
C914 104 50V(MP)
C913 224 63V(MP)
C218 223 25V
C215 100uF 10V
C219 222 16V
C220 1uF 50V
R211 15K
C221 472 16V
C223 223 25V
C222 2.2uF 50V
R215 100
R216 1K
C226 102 50V
R217 1K
C227 102 50V
R218 39K
C229 104 50V(PPP)
VERTICAL-
VERTICAL+
PCBV
DVD-C
DVD-Y
DVD-CVBS
UOC(-)VCR/DVD SIGNAL BUS
UOC(-)CHROMA DRIVE BUS
ABL
VERTICAL+
VERTICAL-
EW
H-DRIVE
F/S
H-SYNC
IK
B-DRIVE
G-DRIVE
R-DRIVE
UOC(-)CHROMA CRT DRIVE BUS
UOC(-) TM/TONE CONTROL BUS
TILT
FROM/TO HOR/VER DRIVE
CN003 14P
1
2
3
4
5
6
7

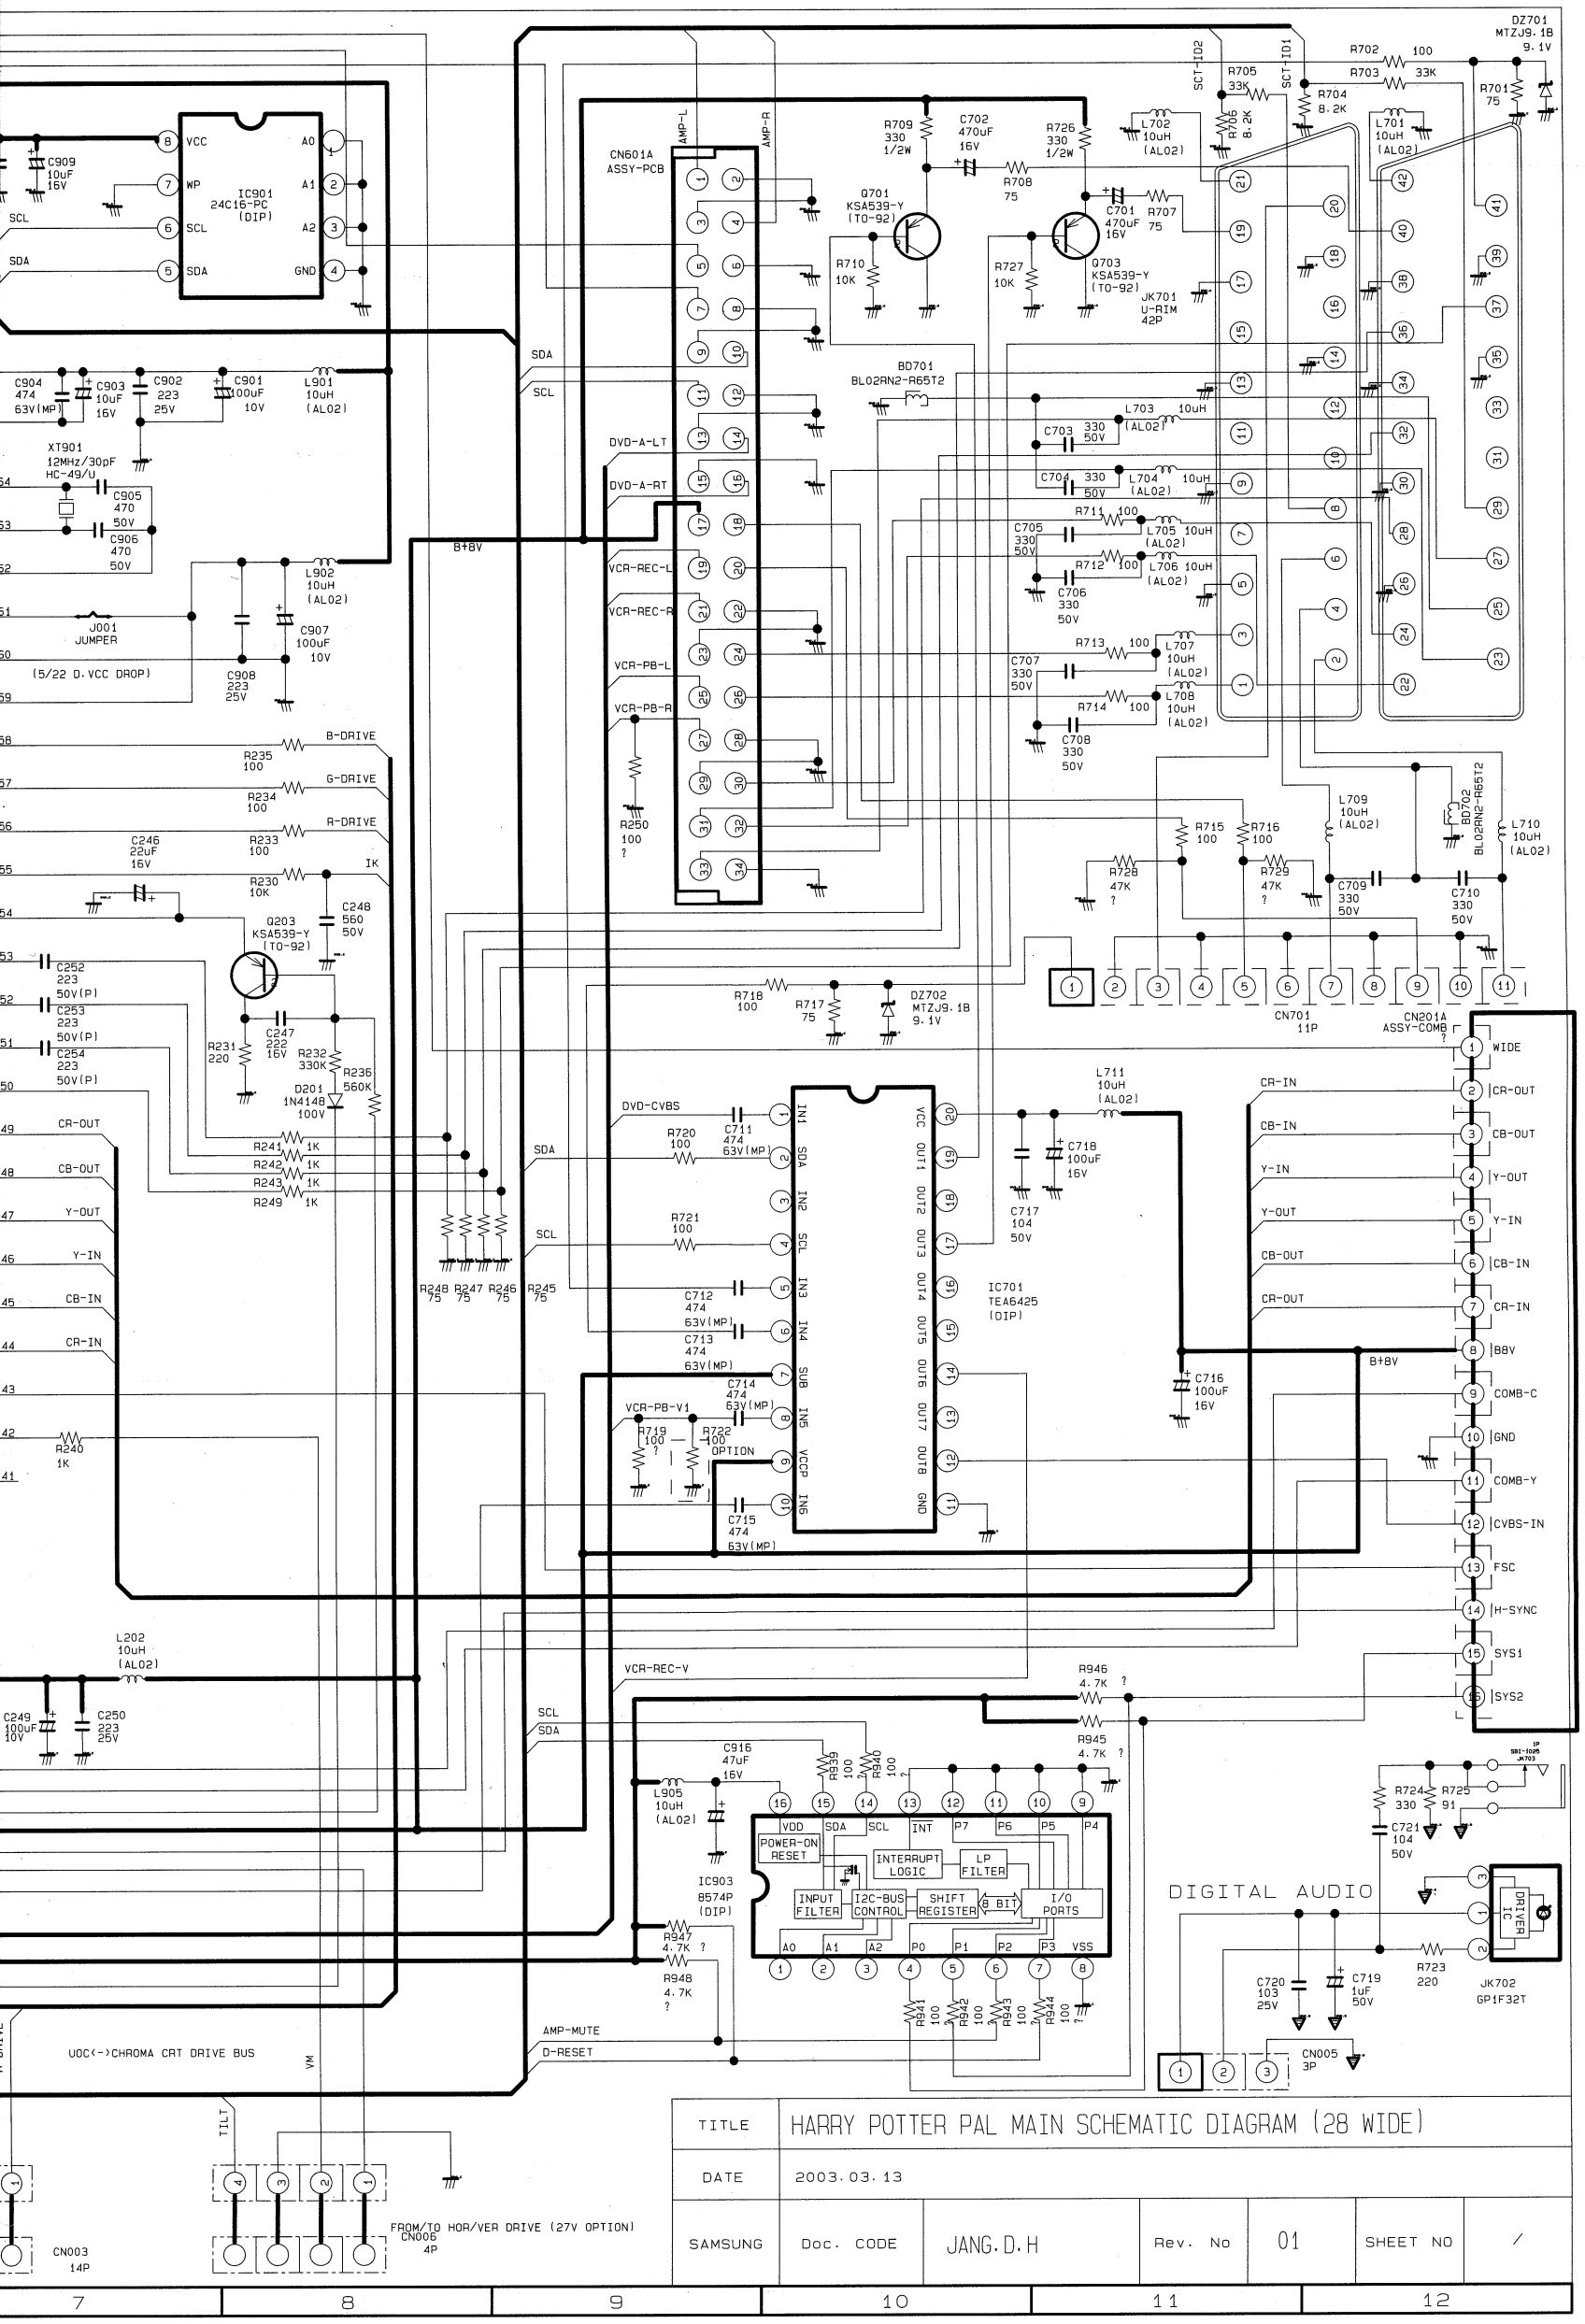
IC901
24C16-PC
(DIP)
VCC
WP
SCL
SDA
A0
A1
A2
GND
C909 10uF 16V
C904 474 63V(MP)
C903 10uF 16V
C902 223 25V
C901 100uF 10V
L901 10uH (AL02)
XT901 12MHz/30pF HC-49/U
C905 470 50V
C906 470 50V
L902 10uH (AL02)
J001 JUMPER
(5/22 D.VCC DROP)
C907 100uF 10V
C908 223 25V
B+8V
B-DRIVE
G-DRIVE
R-DRIVE
IK
R235 100
R234 100
R233 100
R230 10K
C246 22uF 16V
C248 560 50V
Q203 KSA539-Y (TO-92)
C252 223 50V(P)
C253 223 50V(P)
C254 223 50V(P)
C247 222 16V
R231 220
R232 330K
R236 560K
D201 1N4148 100V
CR-OUT
CB-OUT
Y-OUT
Y-IN
CB-IN
CR-IN
R241 1K
R242 1K
R243 1K
R249 1K
R240 1K
L202 10uH (AL02)
C249 100uF 10V
C250 223 25V
VOC(->)CHROMA CRT DRIVE BUS
VM
TILT
CN003 14P
FROM/TO HOR/VER DRIVE (27V OPTION) CN006 4P
CN601A ASSY-PCB
AMP-L
AMP-R
SDA
SCL
DVD-A-LT
DVD-A-RT
VCR-REC-L
VCR-REC-R
VCR-PB-L
VCR-PB-R
R250 100 ?
R709 330 1/2W
C702 470uF 16V
R726 330 1/2W
L702 10uH (AL02)
SCT-ID2
SCT-ID1
R705 33K
R706 8.2K
R702 100
R703 33K
R704 8.2K
DZ701 MTZJ9.1B 9.1V
R701 75
L701 10uH (AL02)
Q701 KSA539-Y (TO-92)
R708 75
C701 470uF 16V
R707 75
R710 10K
R727 10K
Q703 KSA539-Y (TO-92)
JK701 U-RIM 42P
BD701 BL02RN2-R65T2
L703 10uH (AL02)
C703 330 50V
C704 330 50V
L704 10uH (AL02)
R711 100
C705 330 50V
L705 10uH (AL02)
R712 100
L706 10uH (AL02)
C706 330 50V
R713 100
L707 10uH (AL02)
C707 330 50V
R714 100
L708 10uH (AL02)
C708 330 50V
R715 100
R716 100
L709 10uH (AL02)
BD702 BL02RN2-R65T2
L710 10uH (AL02)
R728 47K ?
R729 47K ?
C709 330 50V
C710 330 50V
R718 100
R717 75
DZ702 MTZJ9.1B 9.1V
CN701 11P
CN201A ASSY-COMB ?
WIDE
CR-IN
CR-OUT
CB-IN
CB-OUT
Y-IN
Y-OUT
B8V
COMB-C
GND
COMB-Y
CVBS-IN
FSC
H-SYNC
SYS1
SYS2
DVD-CVBS
R720 100
C711 474 63V(MP)
R721 100
C712 474 63V(MP)
C713 474 63V(MP)
C714 474 63V(MP)
VCR-PB-V1
R719 100 ?
R722 100 OPTION
C715 474 63V(MP)
IC701 TEA6425 (DIP)
IN1 SDA IN2 SCL IN3 IN4 SUB IN5 VCCP IN6
VCC OUT1 OUT2 OUT3 OUT4 OUT5 OUT6 OUT7 OUT8 GND
L711 10uH (AL02)
C717 104 50V
C718 100uF 16V
C716 100uF 16V
R718 100
R717 75
DZ702 MTZJ9.1B 9.1V
R248 75
R247 75
R246 75
R245 75
VCR-REC-V
R946 4.7K ?
R945 4.7K ?
C916 47uF 16V
L905 10uH (AL02)
R539 100
R540 100
IC903 8574P (DIP)
VDD SDA SCL INT P7 P6 P5 P4
POWER-ON RESET
INTERRUPT LOGIC
LP FILTER
INPUT FILTER
I2C-BUS CONTROL
SHIFT REGISTER
8 BIT
I/O PORTS
A0 A1 A2 P0 P1 P2 P3 VSS
R947 4.7K ?
R948 4.7K ?
R941 100 ?
R942 100 ?
R943 100 ?
R944 100 ?
AMP-MUTE
D-RESET
DIGITAL AUDIO
R724 330
R725 91
C721 104 50V
R723 220
C720 103 25V
C719 1uF 50V
JK702 GP1F32T
CN005 3P
TITLE
HARRY POTTER PAL MAIN SCHEMATIC DIAGRAM (28 WIDE)
DATE
2003.03.13
SAMSUNG
Doc. CODE
JANG.D.H
Rev. No
01
SHEET NO
/
7
8
9
10
11
12

7-5 POWER BLOCK-1(28")

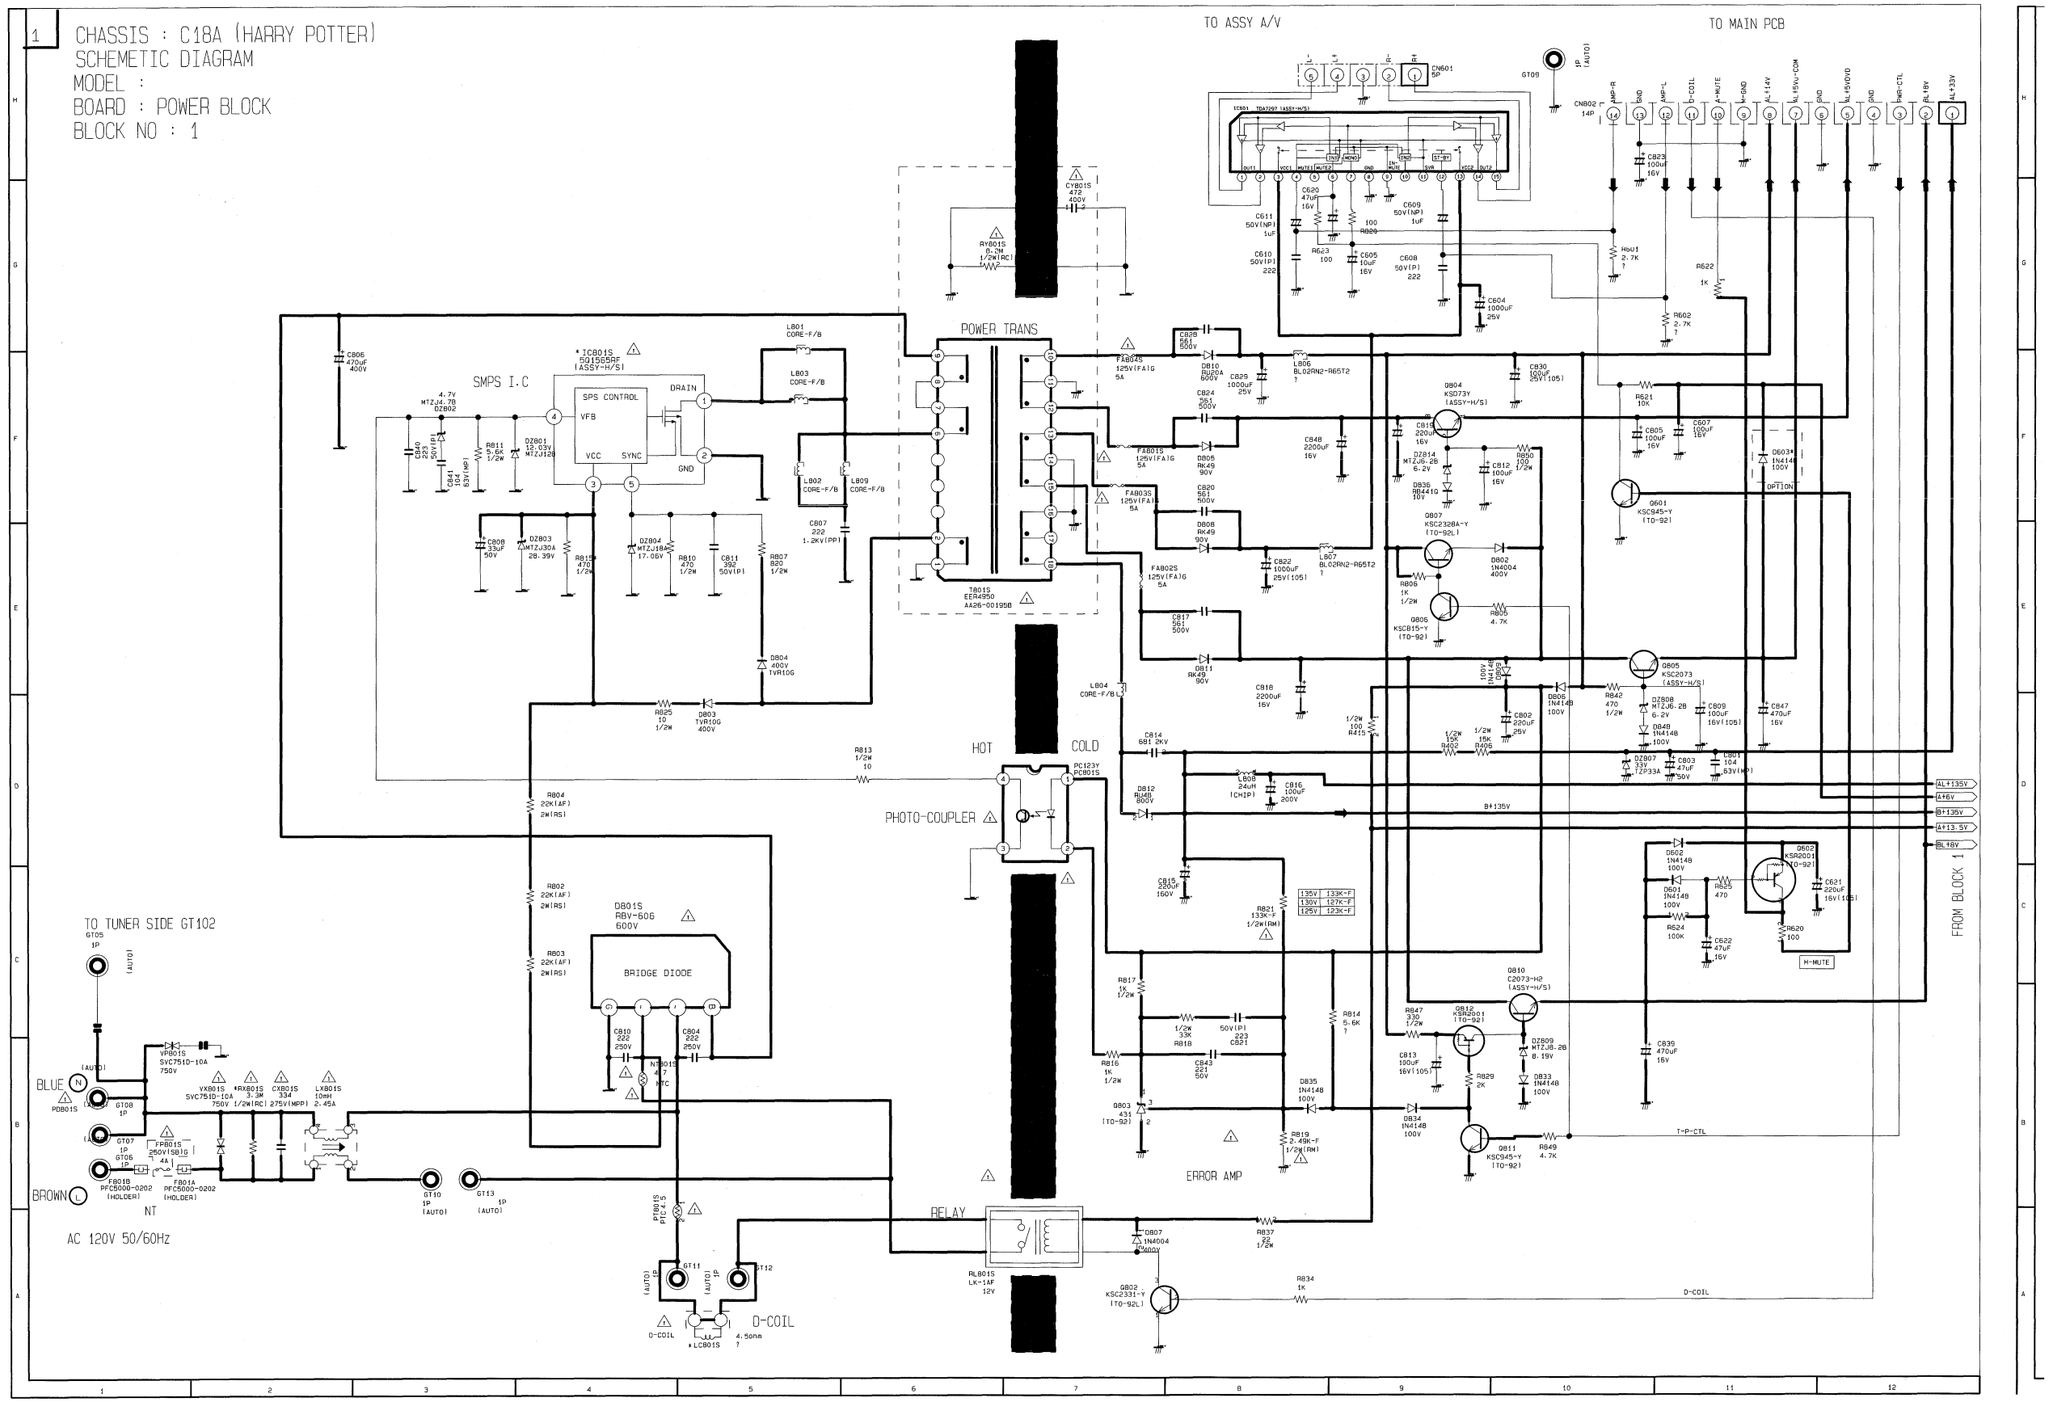

7-6 POWER BLOCK-2 (28")

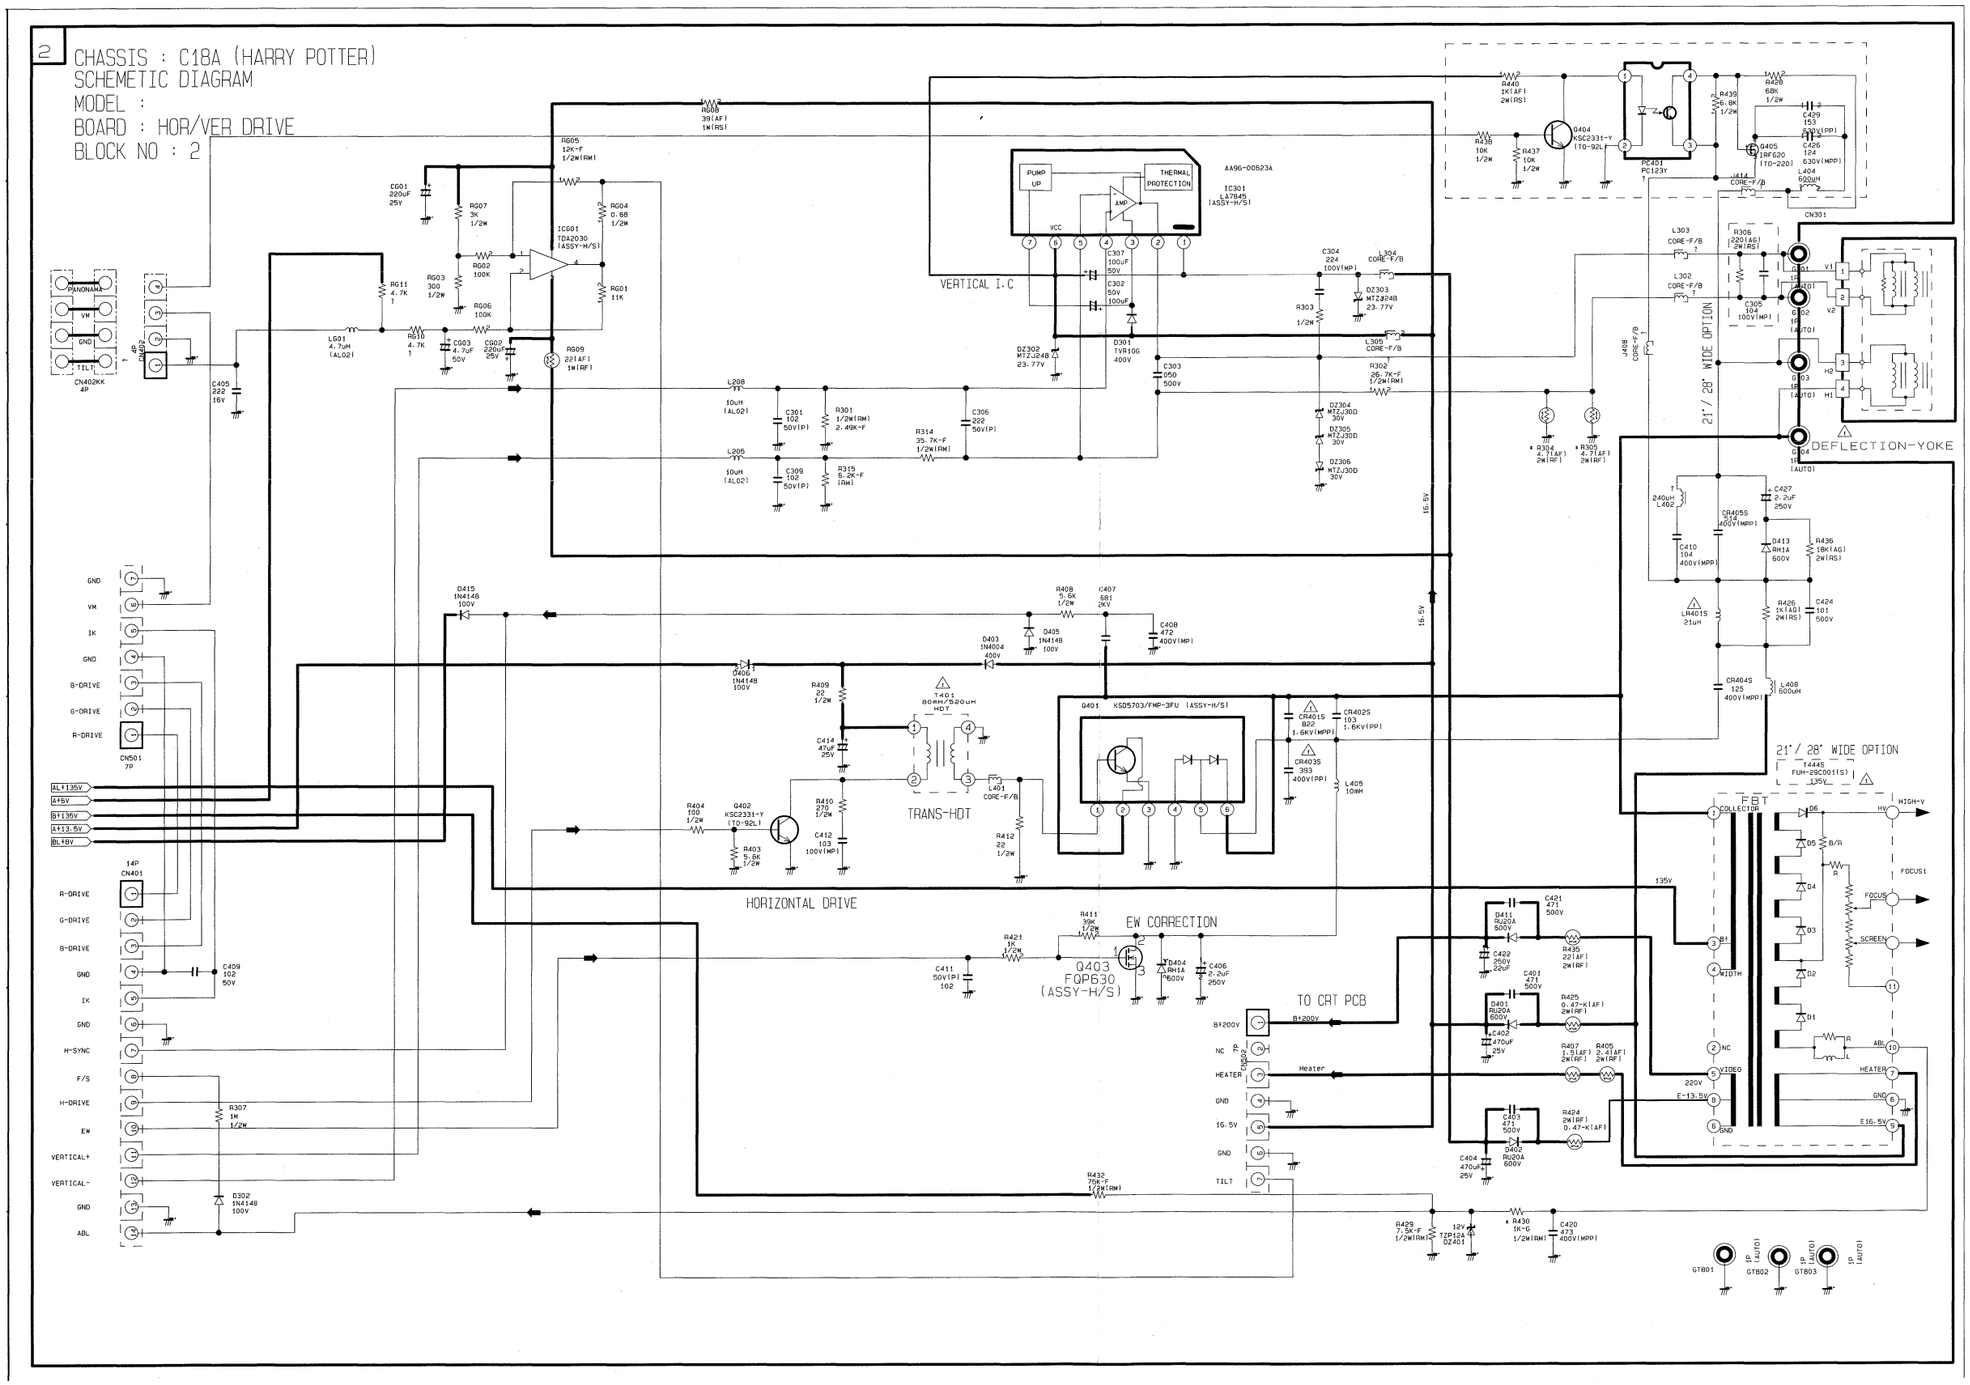

7-7 POWER BLOCK-1 (21")

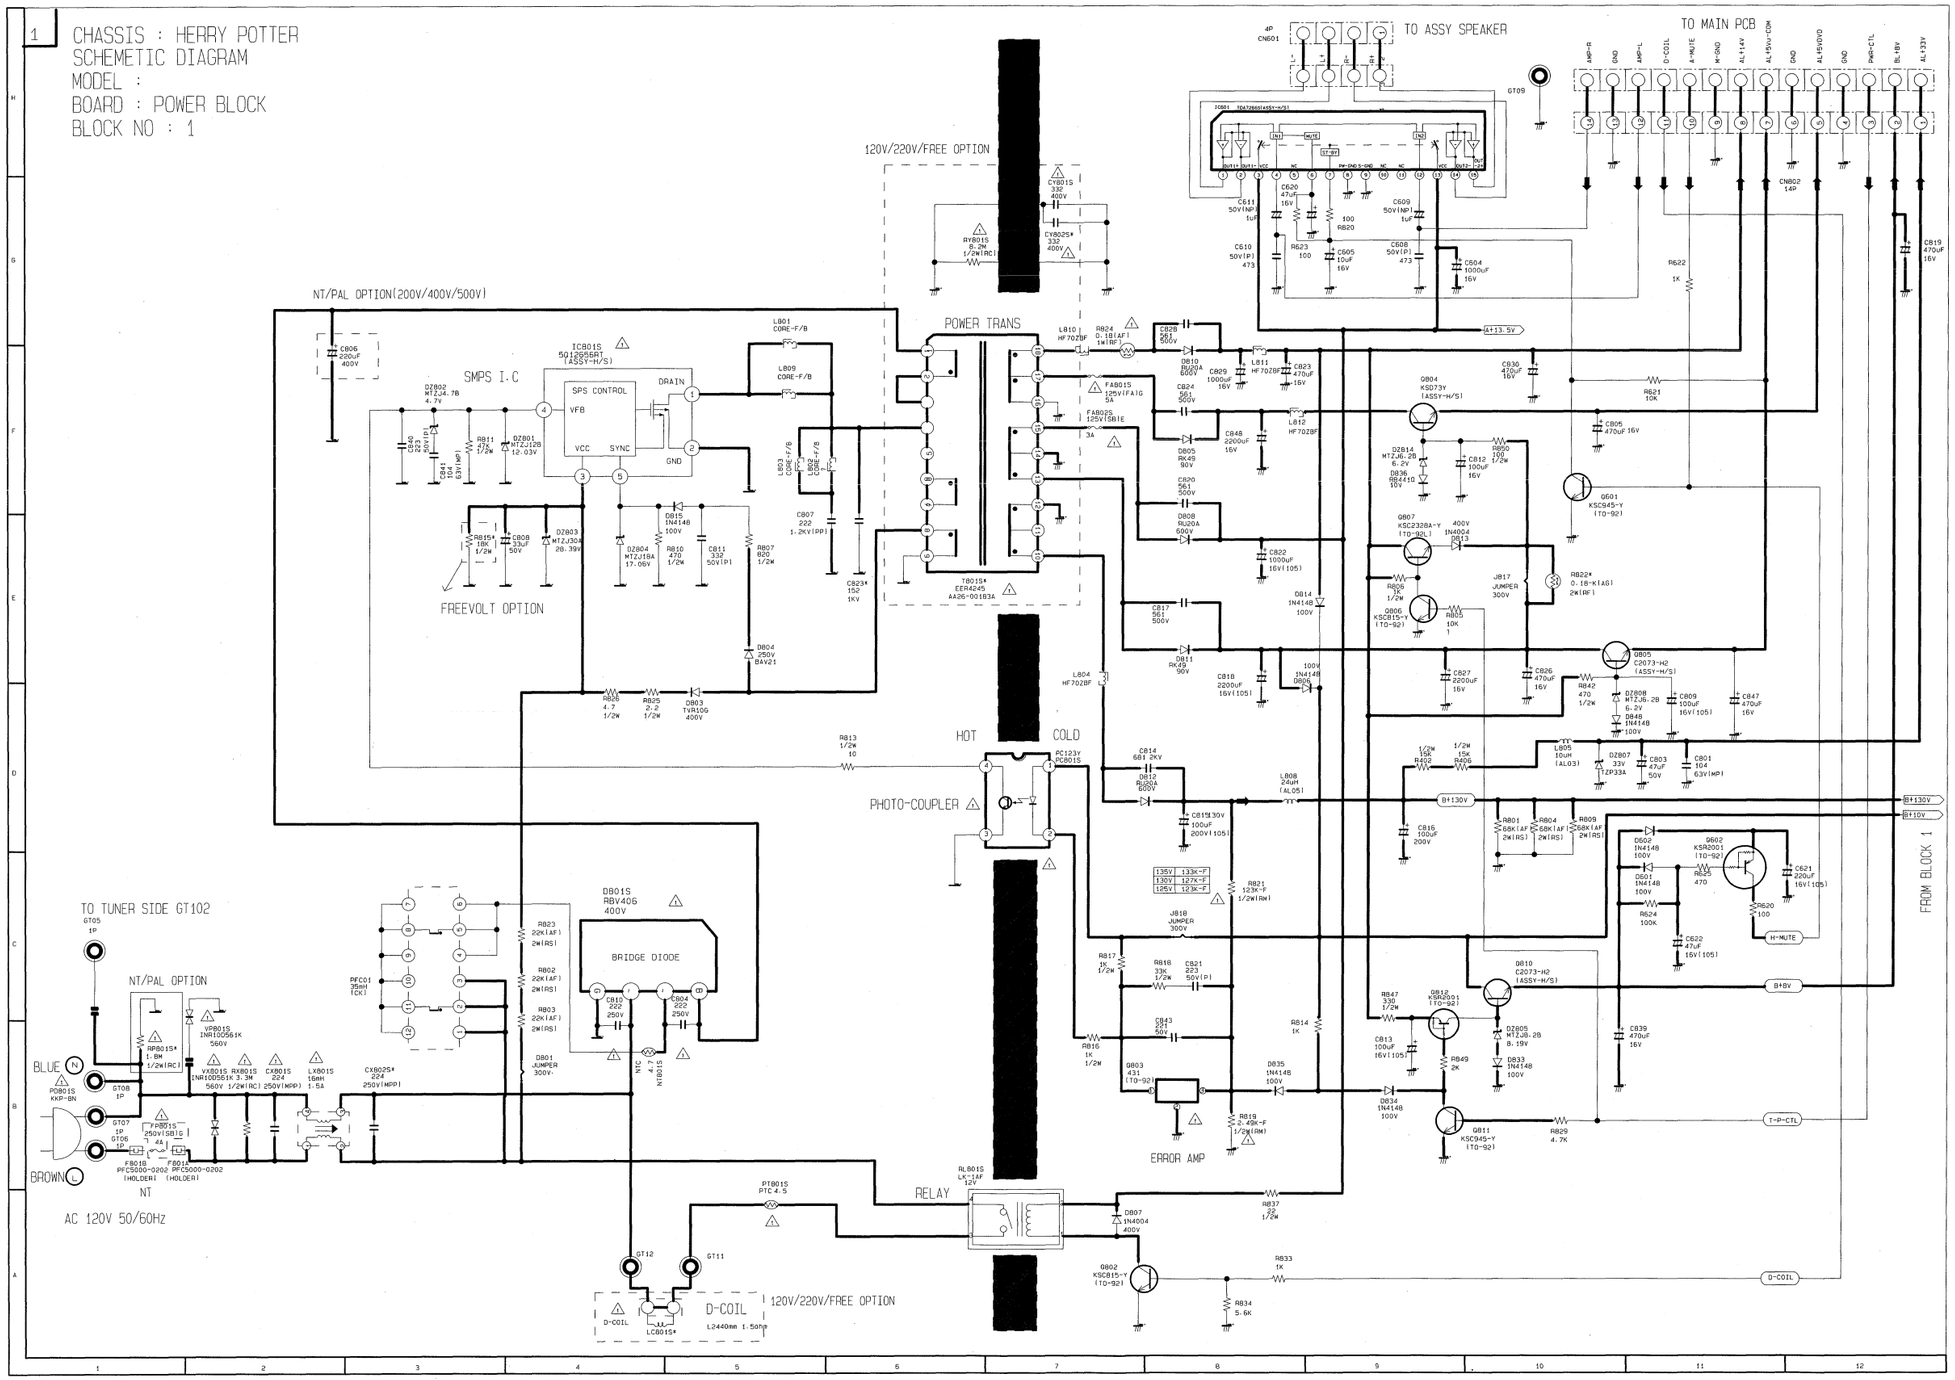

7-8 POWER BLOCK-2 (21")

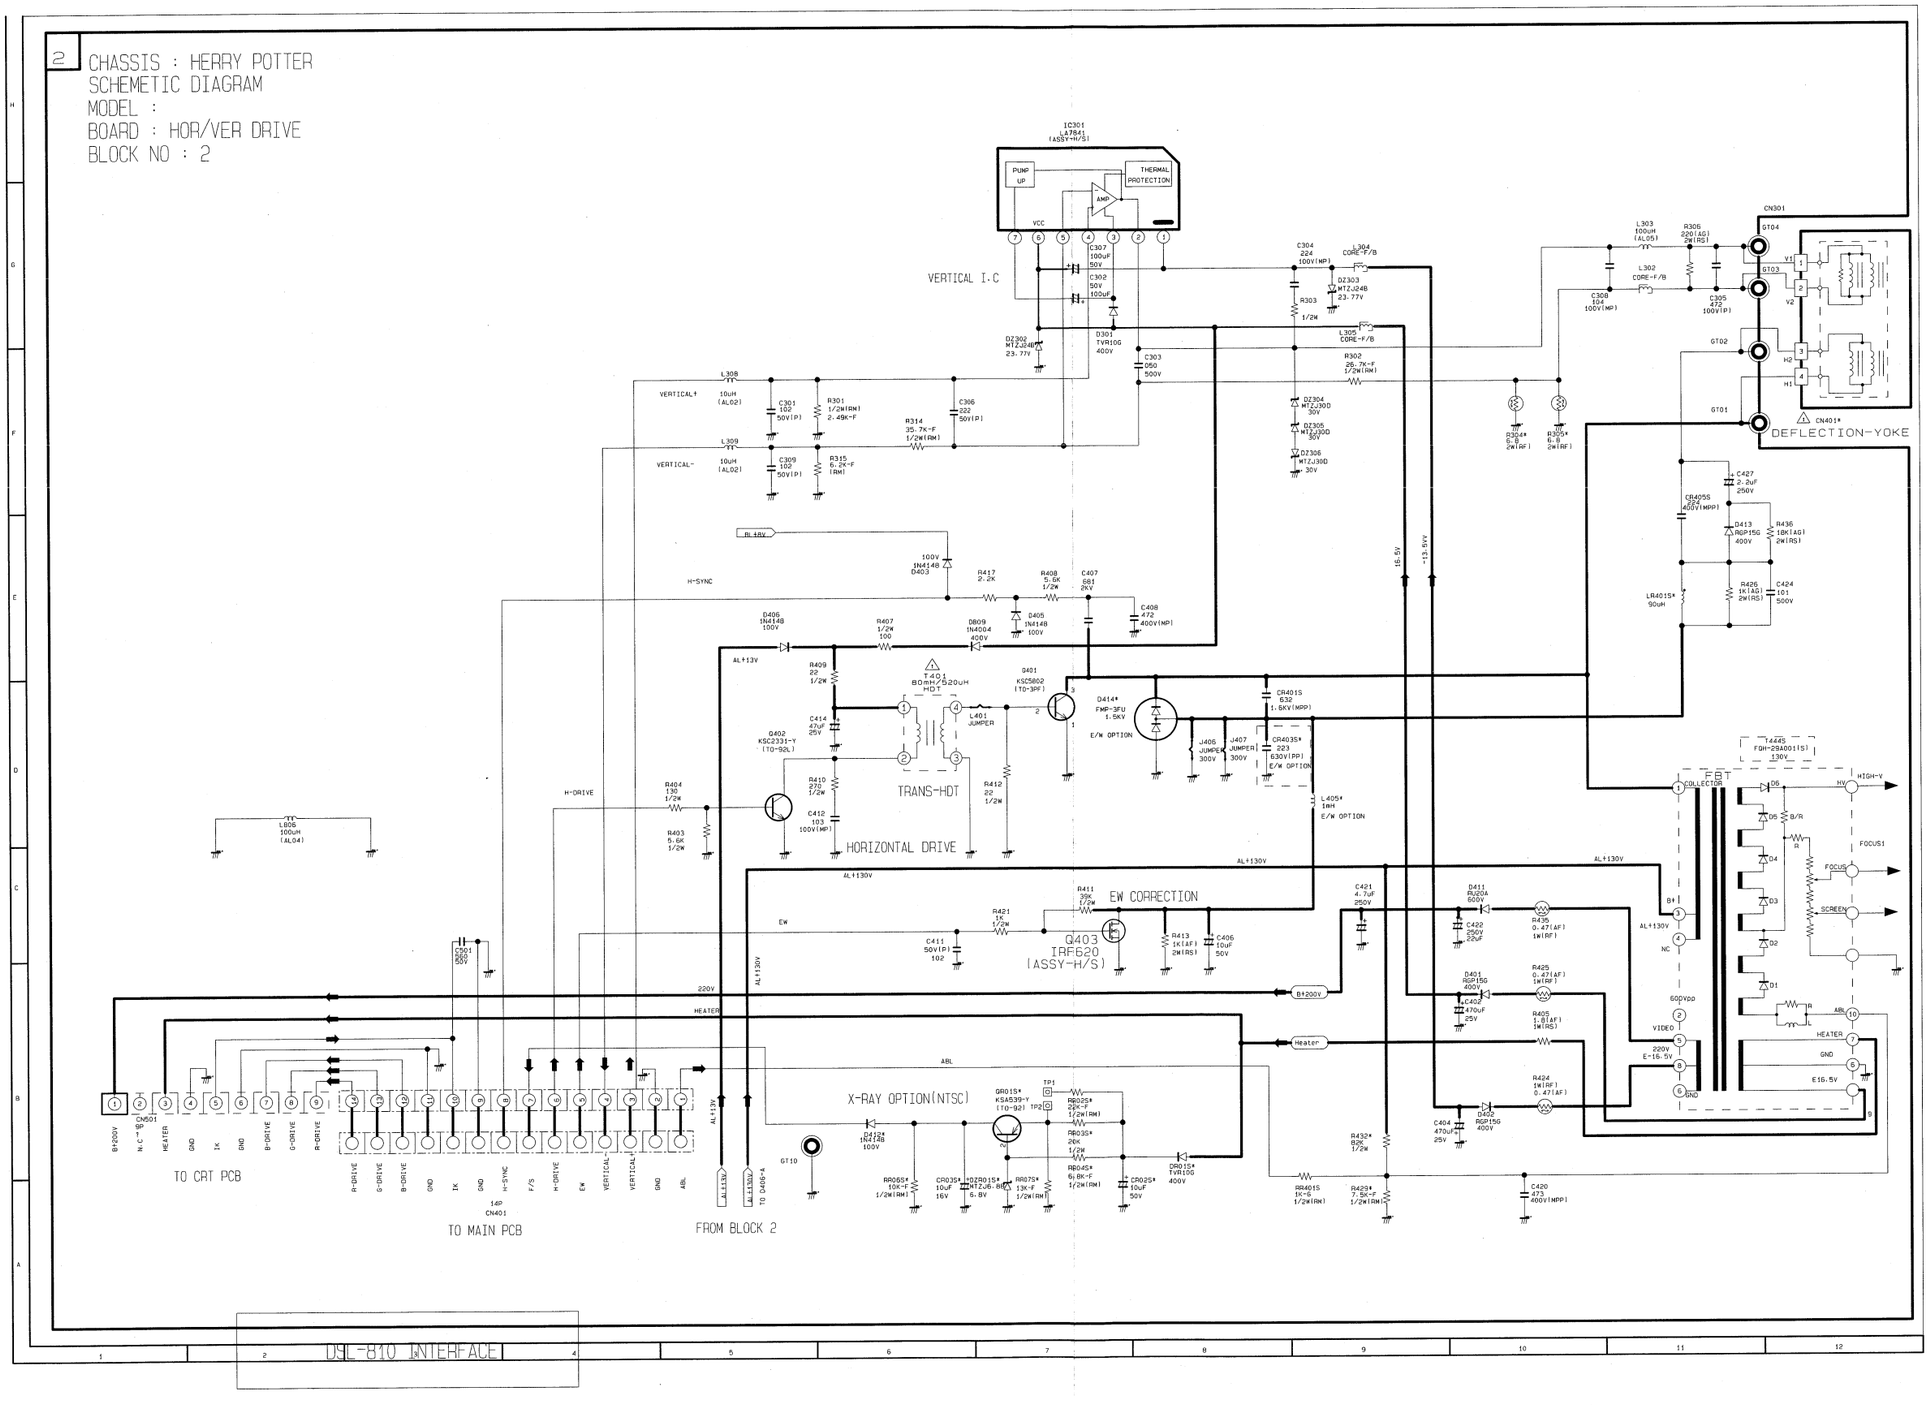

7-9 INTERFACE BLOCK

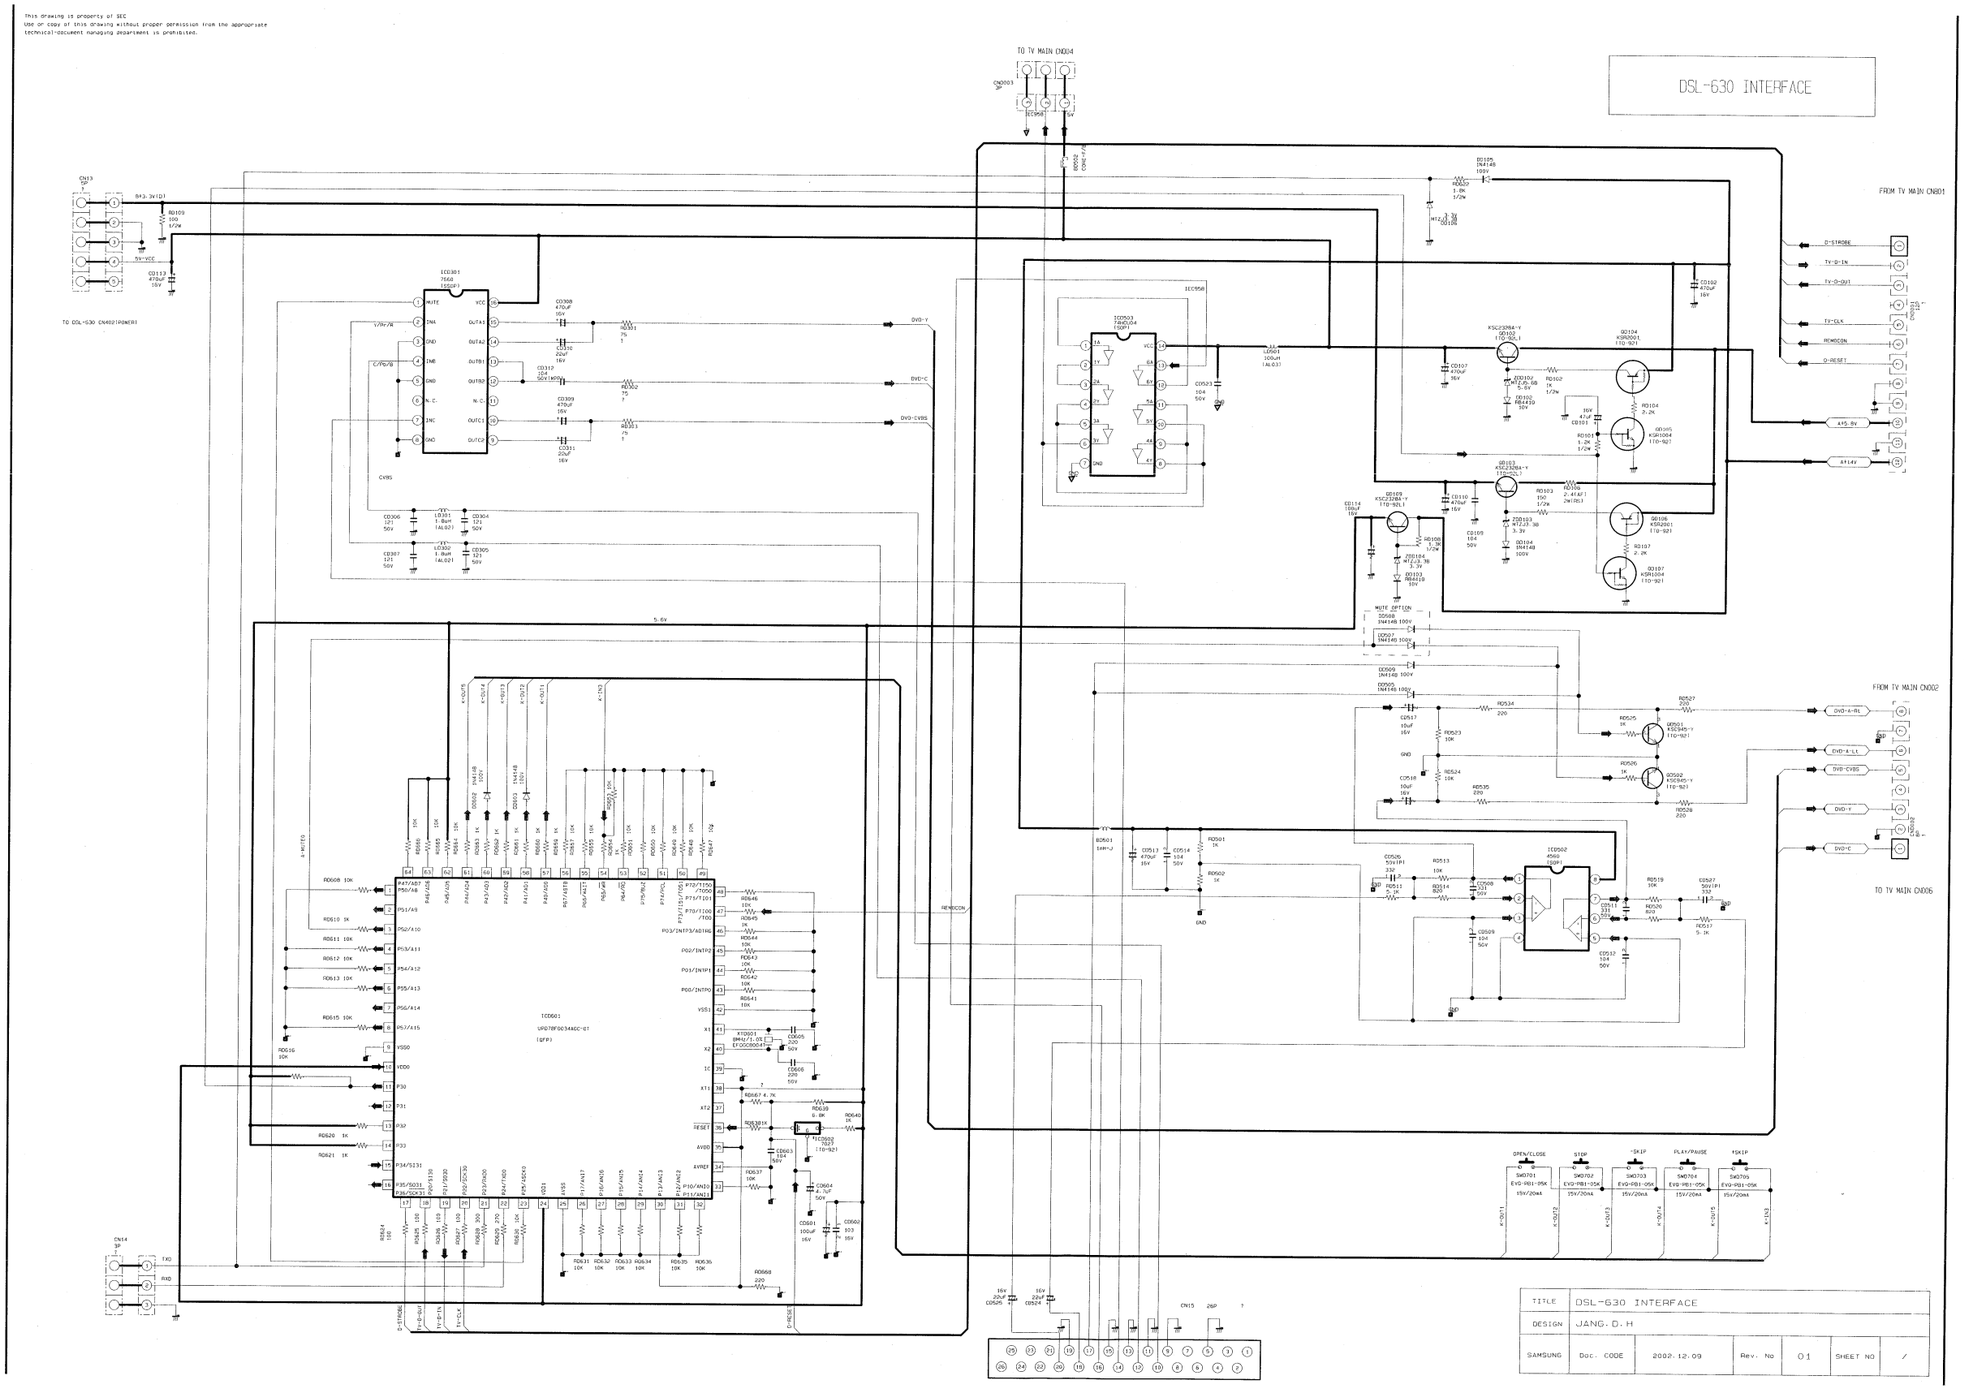

7-10 CRT BLOCK

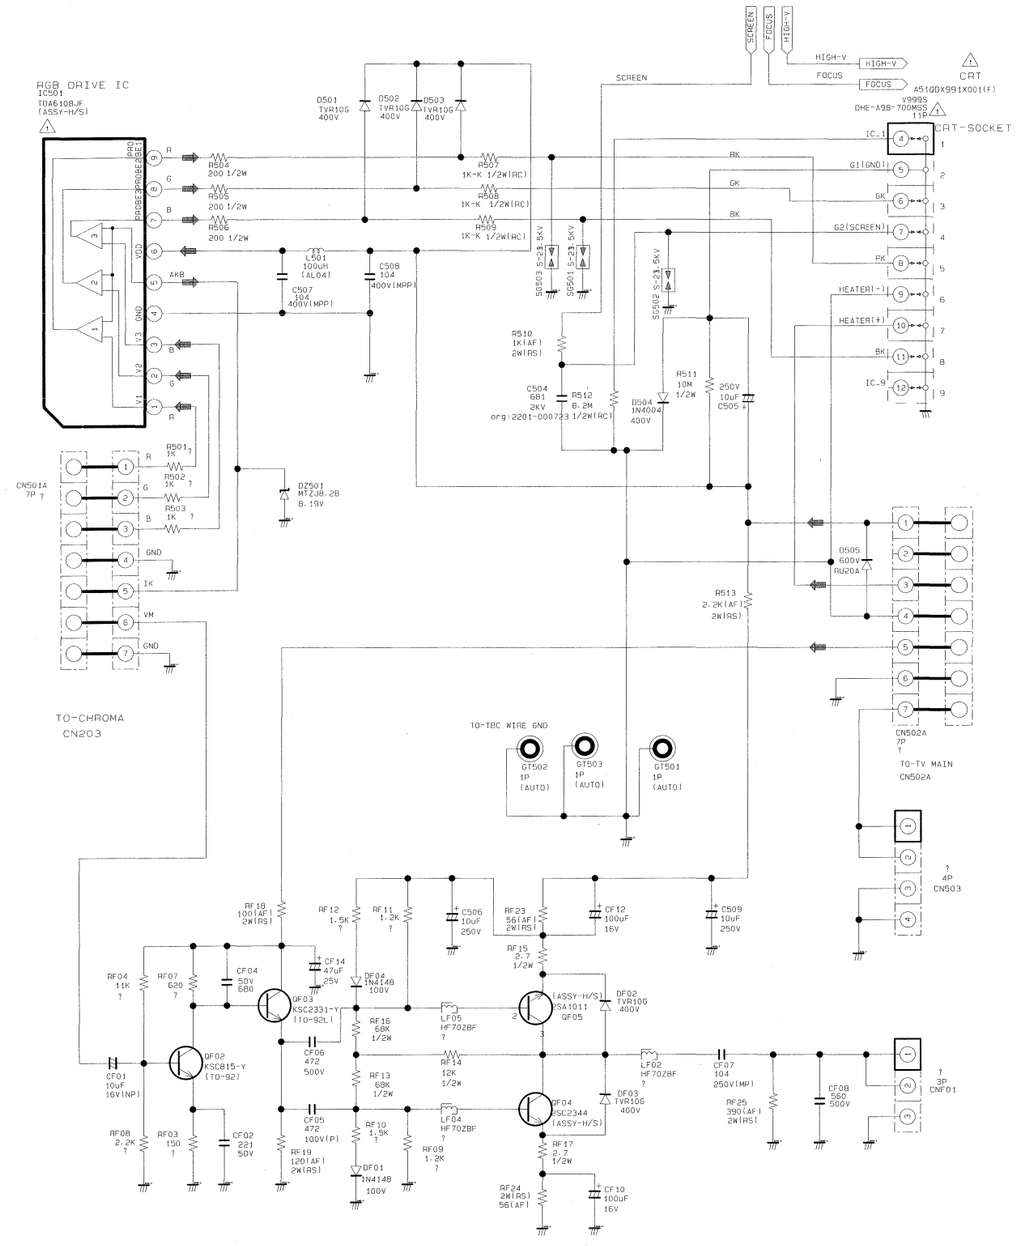

7-11 PFC

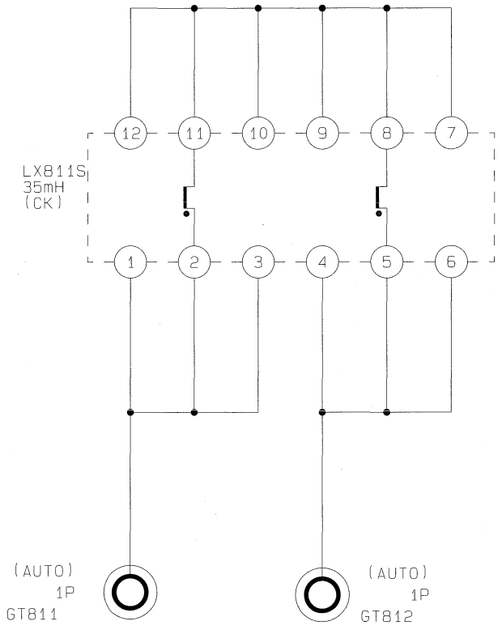

7-12 A/V

This drawing is property of SEC
Use or copy of this drawing without proper permission from the appropriate
technical-document managing department is prohibited.

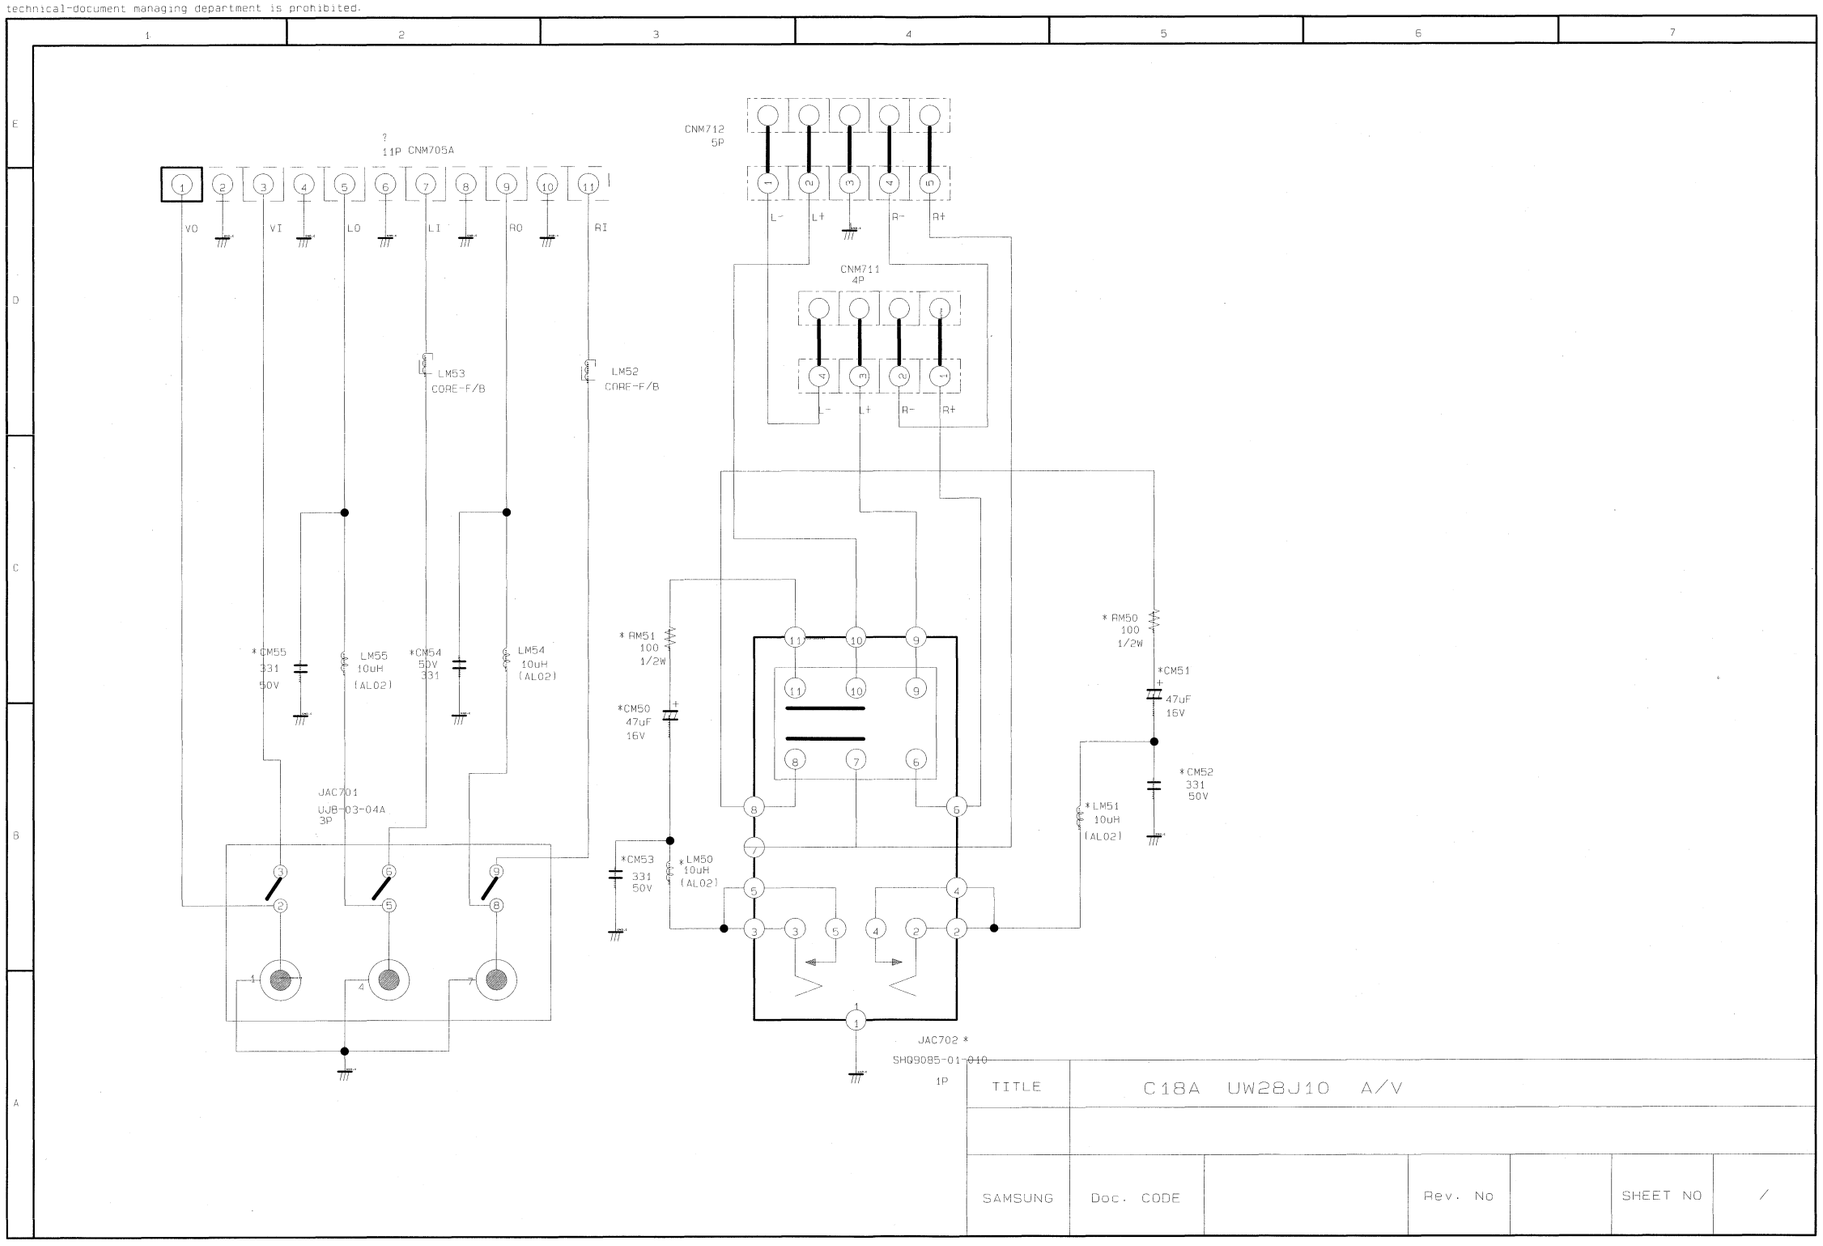

7-13 MSP

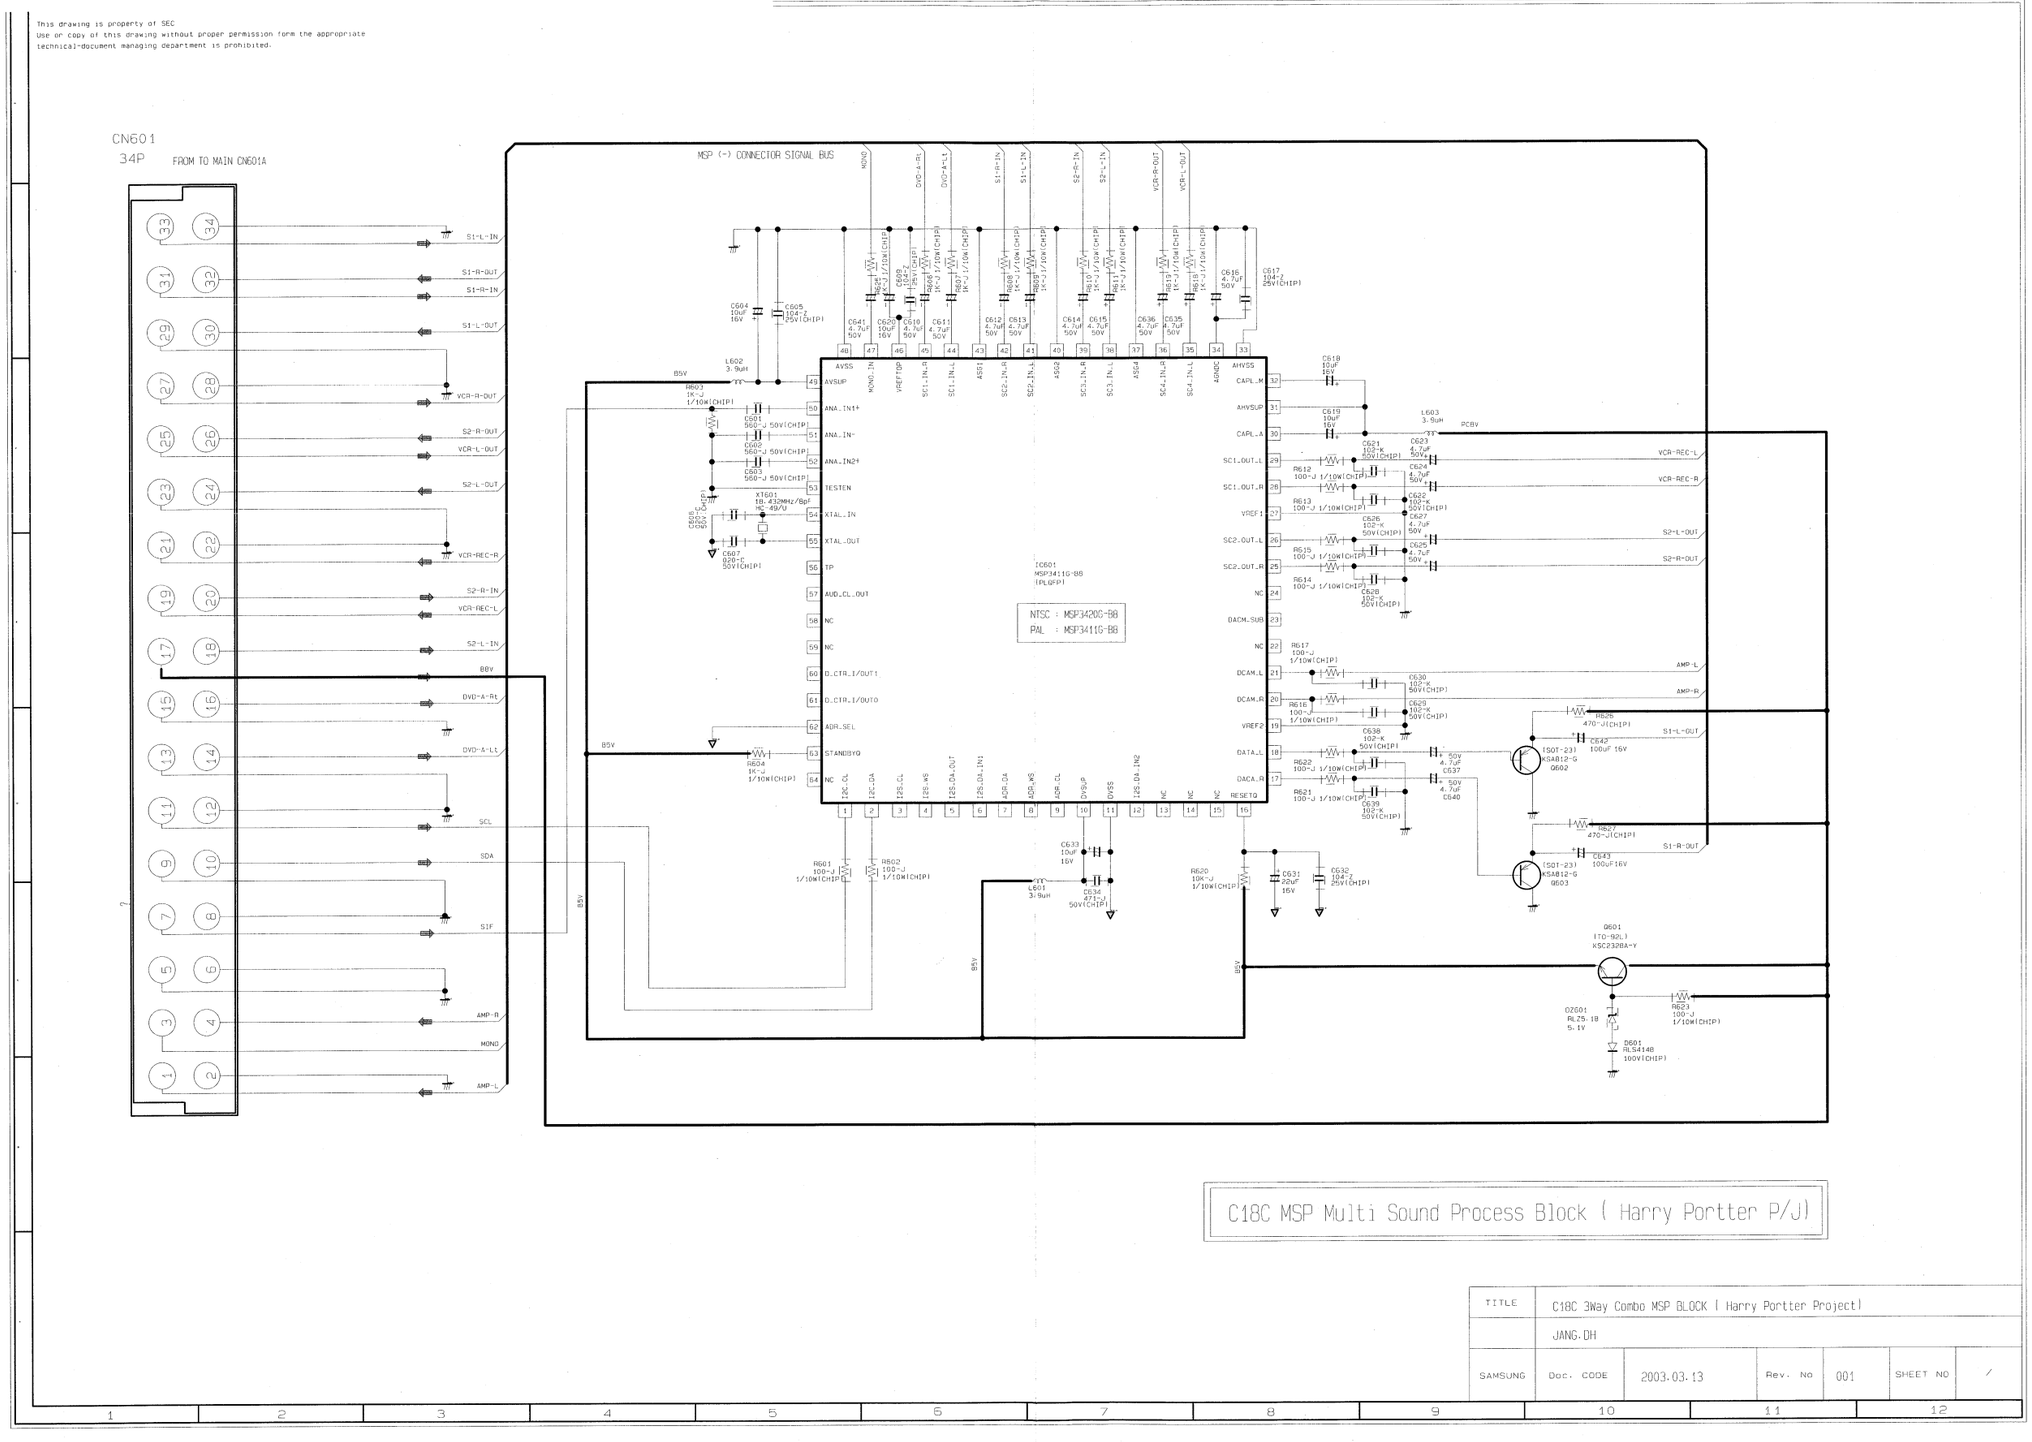
This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate technical-document managing department is prohibited.
CN601
34P
FROM TO MAIN CN601A
S1-L-IN
S1-R-OUT
S1-R-IN
S1-L-OUT
VCR-R-OUT
S2-R-OUT
VCR-L-OUT
S2-L-OUT
VCR-REC-R
S2-R-IN
VCR-REC-L
S2-L-IN
B8V
DVD-A-Rt
DVD-A-Lt
SCL
SDA
SIF
AMP-R
MONO
AMP-L
MSP (-) CONNECTOR SIGNAL BUS
IC601
MSP3411G-B8
(PLCC)
NTSC : MSP3420G-B8
PAL : MSP3411G-B8
X1601
18.432MHz/8pF
HC-49/U
L602
3.9uH
L603
3.9uH
L601
3.9uH
PCB5V
B5V
C618
10uF
16V
C619
10uF
16V
C633
10uF
16V
C617
104-Z
25V(CHIP)
C605
104-Z
25V(CHIP)
C607
0201
50V(CHIP)
C608
0201
50V(CHIP)
C634
471-J
50V(CHIP)
C631
22uF
16V
C632
104-Z
25V(CHIP)
R603
1K-J
1/10W(CHIP)
R604
1K-J
1/10W(CHIP)
R601
100-J
1/10W(CHIP)
R602
100-J
1/10W(CHIP)
R620
10K-J
1/10W(CHIP)
C601
560-J 50V(CHIP)
C602
560-J 50V(CHIP)
C603
560-J 50V(CHIP)
C621
102-K
50V(CHIP)
C622
102-K
50V(CHIP)
C623
4.7uF
50V
C624
4.7uF
50V
C625
102-K
50V(CHIP)
C626
102-K
50V(CHIP)
C627
4.7uF
50V
C628
4.7uF
50V
C629
102-K
50V(CHIP)
C630
102-K
50V(CHIP)
C638
102-K
50V(CHIP)
C639
102-K
50V(CHIP)
C636
4.7uF
50V
C635
4.7uF
50V
C637
4.7uF
50V
C640
4.7uF
50V
R612
100-J 1/10W(CHIP)
R613
100-J 1/10W(CHIP)
R615
100-J 1/10W(CHIP)
R614
100-J 1/10W(CHIP)
R616
100-J
1/10W(CHIP)
R617
100-J
1/10W(CHIP)
R622
100-J 1/10W(CHIP)
R621
100-J 1/10W(CHIP)
R625
470-J(CHIP)
R626
470-J(CHIP)
C642
100uF 16V
C643
100uF16V
Q602
(SOT-23)
KSA812-G
Q603
(SOT-23)
KSA812-G
Q601
(TO-92L)
KSC2328A-Y
R623
100-J
1/10W(CHIP)
D601
RLS148
100V(CHIP)
DZG01
RLZ5.1B
5.1V
VCR-REC-L
VCR-REC-R
S2-L-OUT
S2-R-OUT
AMP-L
AMP-R
S1-L-OUT
S1-R-OUT
C18C MSP Multi Sound Process Block (Harry Portter P/J)
TITLE
C18C 3Way Combo MSP BLOCK (Harry Portter Project)
JANG.DH
SAMSUNG
Doc. CODE
2003.03.13
Rev. No
001
SHEET NO
/

7-14 COMB

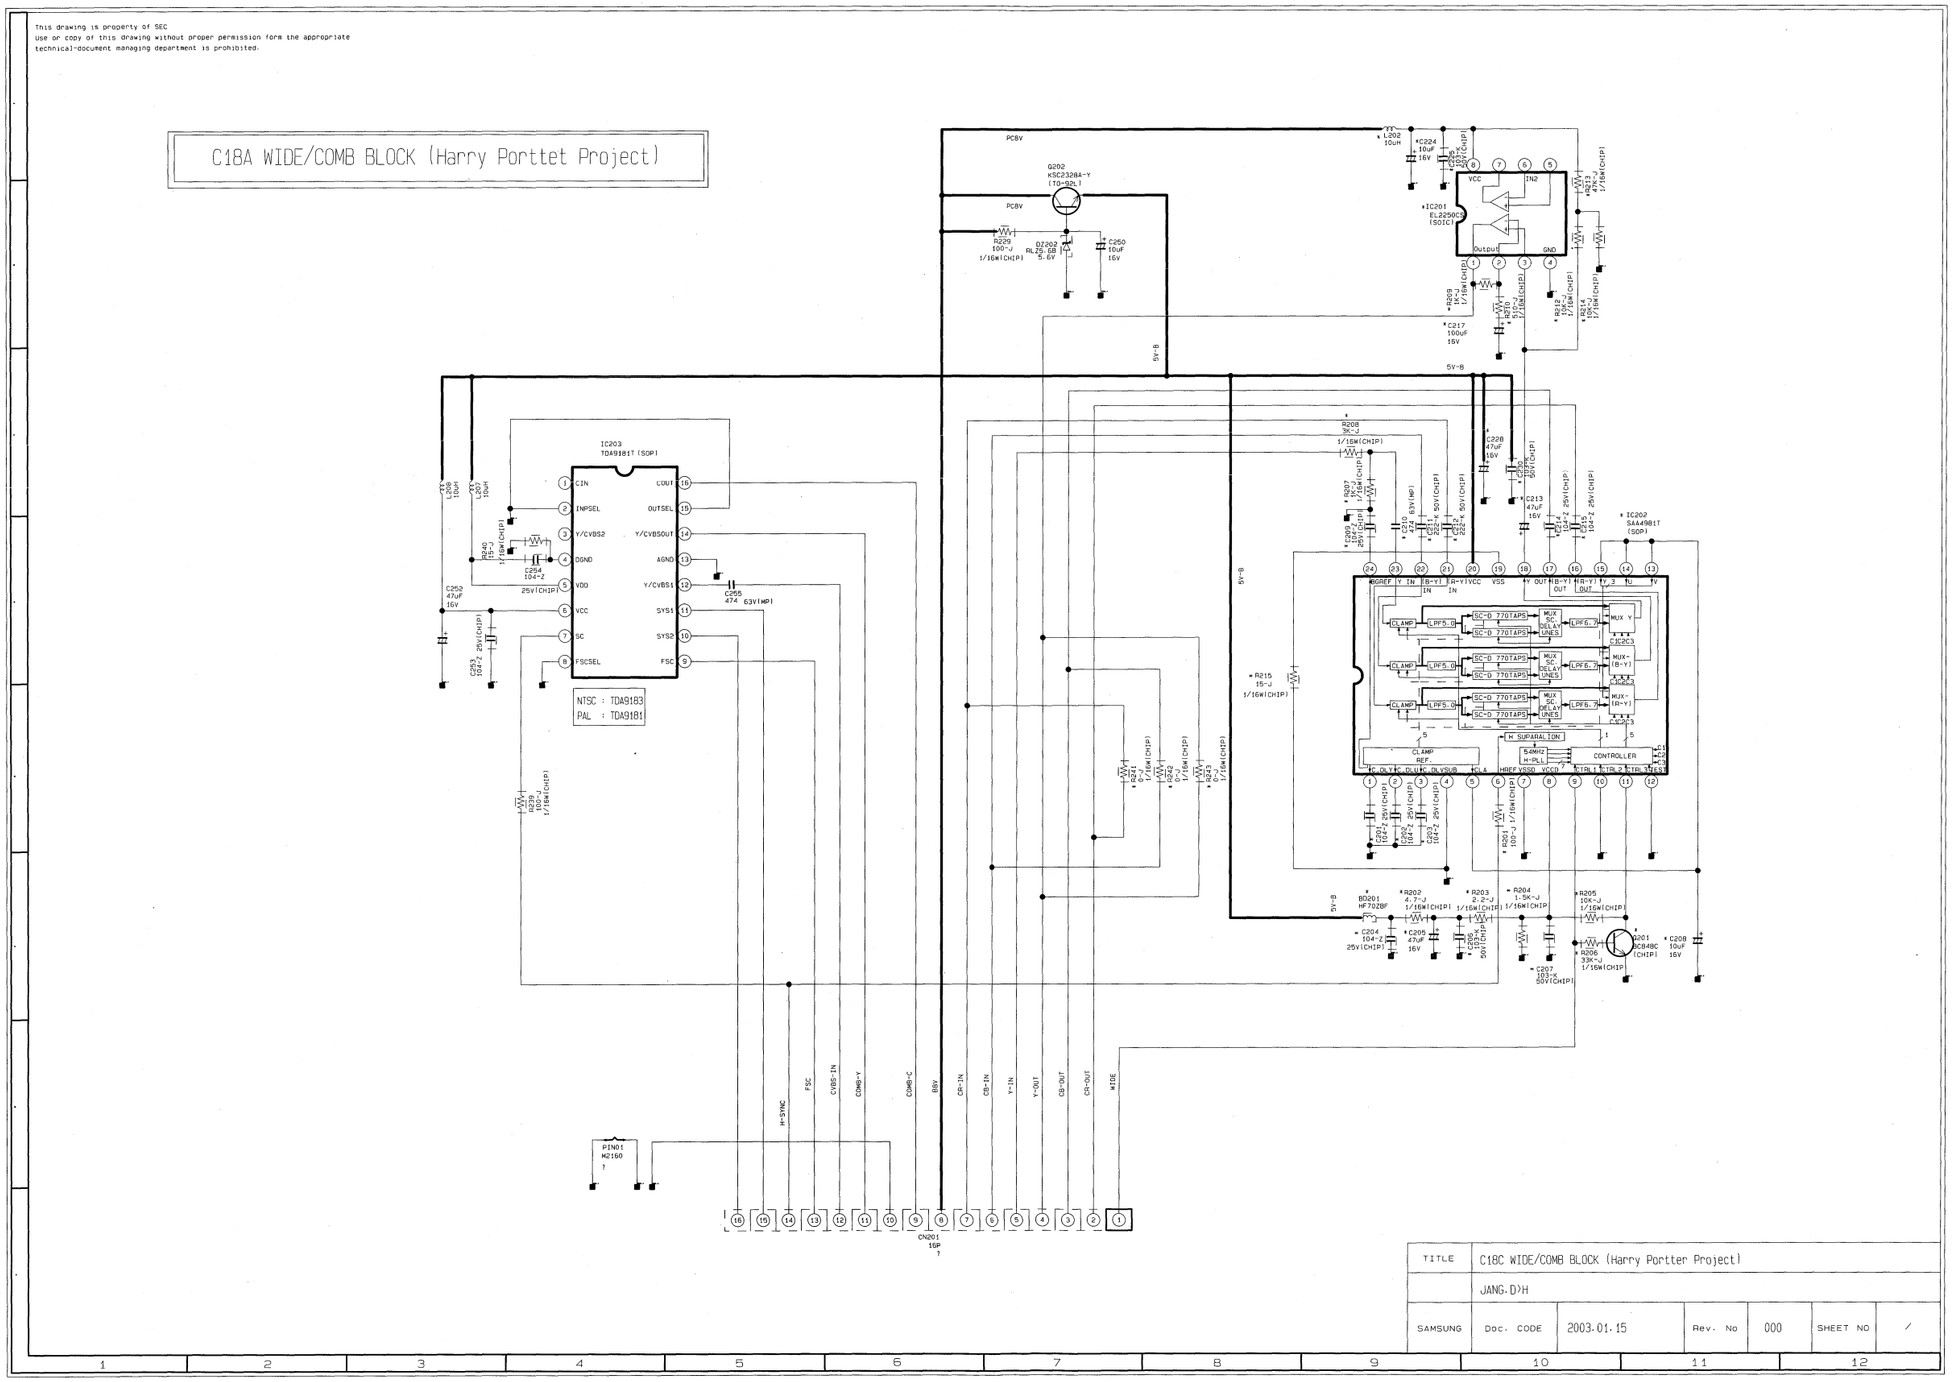
This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.
C18A WIDE/COMB BLOCK (Harry Porttet Project)
IC203
TDA9181T (SOP)
NTSC : TDA9183
PAL : TDA9181
IC202
S444981T
(SOP)
IC201
EL2250CS
(SOIC)
Q202
KSC2328A-Y
(TO-92L)
CN201
16P
PIN01
M2160
TITLE
C18C WIDE/COMB BLOCK (Harry Porttet Project)
JANG.D>H
SAMSUNG
Doc. CODE
2003.01.15
Rev. No
000
SHEET NO

7-15 MASTER S/W 21"

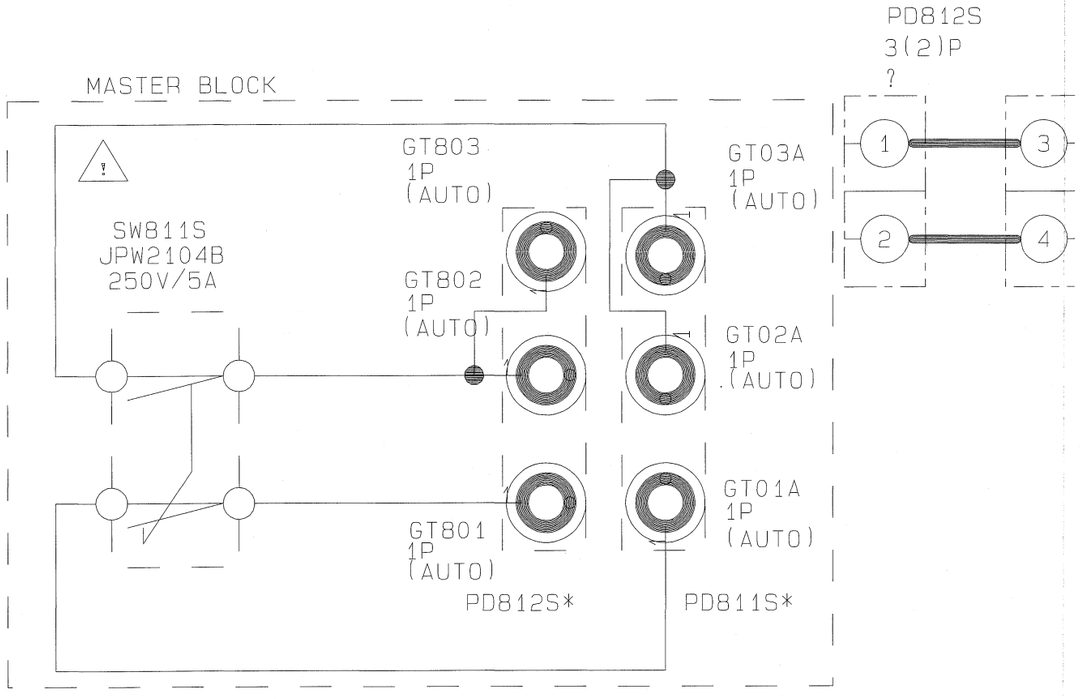

7-16 MASTER S/W 28"
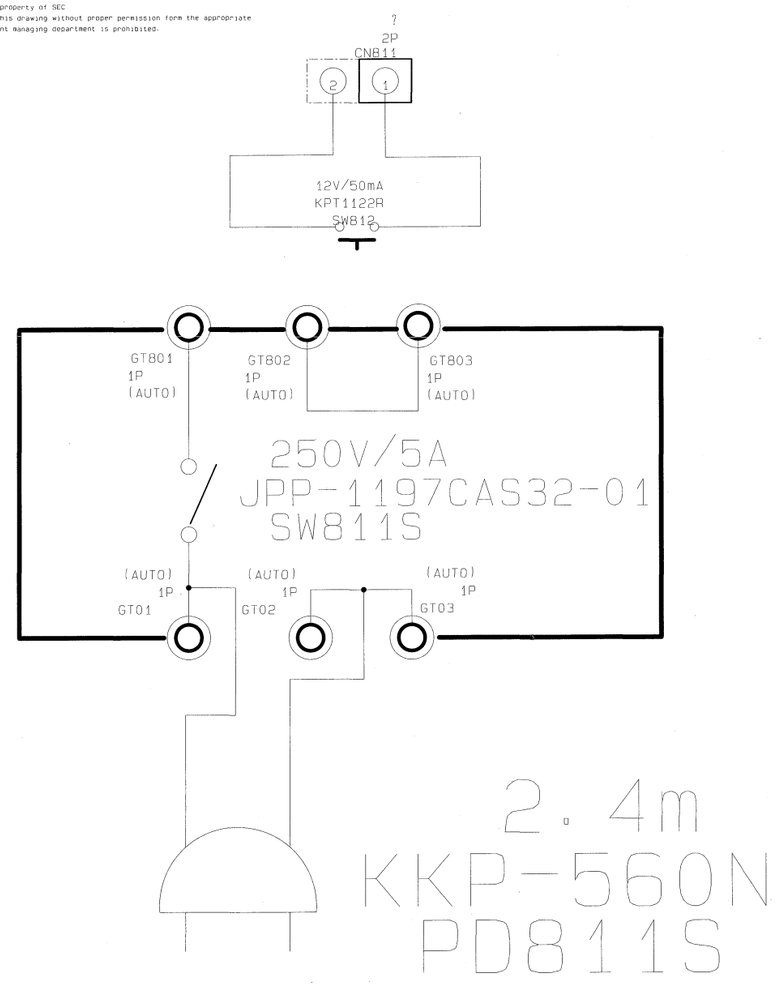
This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.